SKYTTA

Sliding door system


Safety

This furniture must be fixed to the ceiling. Different ceiling materials require different types of fixing hardware. Use fixing hardware suitable for the ceilings in your home, sold separately.

Clean the floor rail and door wheels regularly to make sure the doors run smoothly and the wheels are not damaged.

10

SKYTTA sliding door system has a 10-year limited warranty

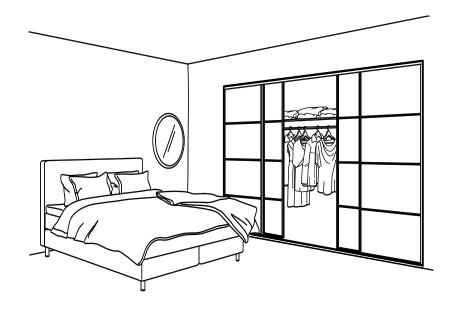

Sliding doors for any space

Save space, create new space or hide space with SKYTTA sliding doors. The door frames and rails come in three different colours and combine with panels from the PAX range to create a personal solution. Made to run between the ceiling and floor, so no wardrobe frames are needed, and suitable with any of our storage system that fits your space. Or use them as a room divider. Choose a sleek, minimalistic door or an industrial looking glass door to set the style in your room.



Good to know

Create your own sliding door by choosing between different frames and panels – and combine them as you like.

Our wide range of panels lets you choose between various materials and expressions, such as semi-transparent, glass, high-gloss, wooden foil and mirror.

Integrated handles give the sliding doors a sleek look with clean lines

The total assembly height including the floor and ceiling rails is 204.5 cm (80%") for the 196 cm (77%") door, and 239.7 cm (94%") for the 231 cm (91") door. They can both be adjusted 6 mm (%") up or down.

If your ceiling is higher than the doors, you can use SKYTTA ceiling height reducer and cover panel to create a fake wall and fill the gap up to 35.6 cm (14") above the doors.

If the doors are higher than your ceiling, it's possible to cut the door at the top, along with the panel.

When installing your new storage solution and SKYTTA doors, make sure there are no cables, pipes or heating systems nearby that may prevent the doors from closing completely or which might get damaged during installation.




Plan on paper or use the planner tool

Planning your SKYTTA sliding doors can be a bit tricky, and it's important that all the measurements are correct and aligned. It's perfectly fine to plan on paper if that's what you prefer, but there's also a planner tool available on www.IKEA.ca to help you out!

How to measure your space

Measure the width (X1, X2, X3) and height (Y1, Y2, Y3) of your space. Make sure to measure the height in at least three places as the ceiling or floor might be slightly uneven. It's important

that you measure the exact spot where you are going to place your doors, and that each surface is straight. Uneven or angled surfaces need to be adjusted before the doors are installed.

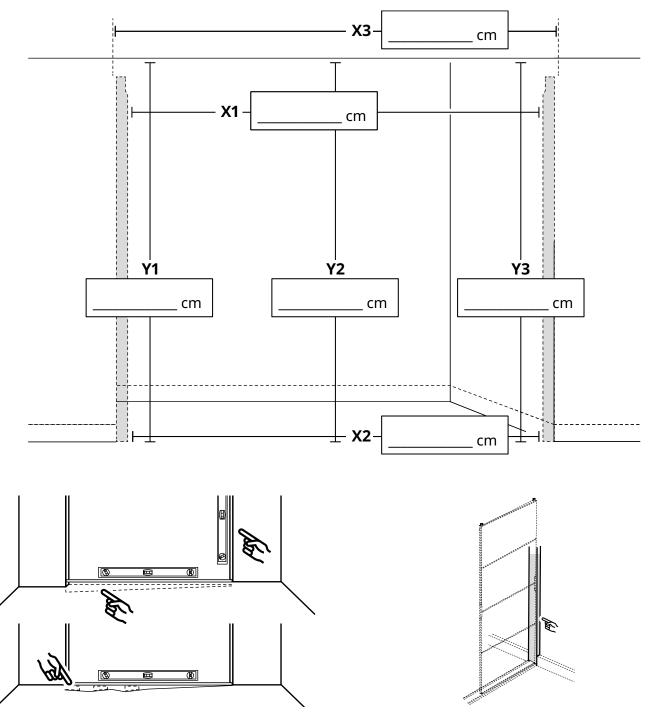

Uneven or angled surfaces need to be adjusted before the doors are installed. The SKYTTA system needs no adjustment if the floor is uneven 0–2 mm (0 - $\frac{1}{2}$ ") per 1 m (39 $\frac{3}{2}$ "), or if the wall is uneven 0–3 mm (0 - $\frac{1}{2}$ ") per 1 m (39 $\frac{3}{2}$ ").

Don't forget about the base board or crown molding. We recommend to always remove or cut them, or there will be a gap between the door and wall. We recommend the use of a stop bar, explained more on page 9.

How to plan – SKYTTA height


Our doors come in two heights, but even if your height is a little bit lower, or a lot higher, there's a solution for you.

Ideal complete solution door + rail			
•	•		
Low door: 204.5 cm (80½") +/-6 mm (¼")	High door: 239.7 cm (94¾") +/-6 mm (¼")		
Distance between floor and ceiling		Problem	Solution
203.9 - 205.1 cm (80¼ - 80¾")	239.1 - 240.3 cm (94% - 94%")	The door fits perfectly! Normal assembly with doors and rails.	
205.2 - 209.5 cm (80¾ - 82½")	240.4 - 244.7 cm (94% - 96%")	Just a little space left above the doors Compensate the ceiling height with space filler pieces toward the ceiling. The space filler pieces are not sold by IKEA.	
207.5 - 241 cm (81¾ - 94¾")	242.7 - 276.2 cm (95½ - 108¾")	A lot of space left above the doors Compensate the ceiling height with SKYTTA ceiling height reducer and cover panels, or contact a carpenter for a customized solution. See more on page 10.	
150 - 203.8 cm (59 - 801/4")	150 - 239 cm (59 - 94½")	The doors are too high It's possible to cut the door and panels. Please note that this option is not applicable for glass or mirror glass panels, as the glass is tempered and will split into tiny pieces. Check in the planning tool which other panels cannot be cut. The assembly instruction for this step is available online only.	

How to plan - sloped ceiling

SKYTTA ceiling rail must be mounted onto a flat surface which is parallell with the floor. It cannot be mounted directly onto a sloped ceiling.


If you want to install SKYTTA sliding doors onto a sloped ceiling, you need to add an extra piece of wall which is wider than the width of the rail, and which creates a 90 degree angle with the wall




How to plan - storage behind

When you are placing storage behind your SKYTTA sliding door it's important to plan so that you are able to reach and/ or open everything.

As an example, a drawer should not be placed behind the overlap of a door unless both doors can be moved, or you will not be able to open the drawer.






How to choose colour and panels

The SKYTTA sliding door frames comes in white, aluminum and black and you can combine them with all the panels from the PAX range. Either go with a matched solution or create a strong impact with contrasting finishes, it's all up to you!

The panels are sold in a package of 4, so for each SKYTTA door you choose, you also need one package of panels. There's a wide variety of colours, materials and finishes to choose from and you can mix them any way you like.

Just keep in mind that some of the panels have a different colour or finish on the backside, something that might be good to know if you are planning a solution where you see the doors from both sides.



How to plan the width of your SKYTTA

The maximum width includes a door overlap of minimum 2.5 cm (1") depending on size of the door.

With SKYTTA system you have many possibilities of combinations. You can combine a small door measuring 77.1 cm (30%") together with a wide door measuring 102.1 cm (40%") and use a 2-track or 3-track rail. You can also experiment with different door overlaps, but keep in mind that a 2.5 cm (1") overlap is the minimum needed.

IKEA recommends as little overlap as possible to get the best symmetry and opening. Also, a big opening is recommended since this makes it easier to reach your things behind the doors. The following examples show the difference between a 2-track and 3-track rail.

Combinations with the 2-track rail

Combinations with the 3-track rail

2 doors in 2-track rail

2×77.1 cm (30%") door





We do not recommend using the 3-track rail for a combination with 2 doors.


3 doors in the 2-track rail



We do not recommend using the 2-track rail for a combination with 3 doors.


3 doors in the 3-track rail

3x 102.1 cm (401/4") doors



4 doors in the 2-track rail


4× 102.1 cm (401/4") doors



We recommend the 2-track rail for this combination. A 3-track rail is possible but will not give a bigger opening or add depth.

4 doors in the 3-track rail

4× 102.1 cm (401/4") doors




How to plan the width of your SKYTTA

Combinations with the 2-track rail

5 doors in the 2-track rail

5× 102.1 cm (401/4") doors




We recommend the 3-track combination since this will give a bigger opening. The 2-track rail is also possible but consider that you will want to easily reach your things behind the doors.

Combinations with the 3-track rail


5 doors in the 3-track rail

5× 102.1 cm (401/4") doors



6 doors in the 2-track rail

6× 102.1 cm (401/4") doors



We recommend both combinations, but the 3-track rail will give a bigger opening. Consider how easily you will want to reach your things behind the doors and the visual aspect.

6 doors in the 3-track rail

6× 102.1 cm (401/4") doors



You will find more possible combinations at the end of this buying guide.


SKYTTA rails and fittings

Pick the right amount of rails


When you have decided on the amount of doors, you pick the rails. Each rail is 2 m (78%) long and can be cut to the correct length if needed and joined to match the width of the doors. They are available in the same finishes as the door frames – white, aluminum and black.

The top rail is mounted in two steps. 1) Start with mounting a wooden beam after you have found good fixing points in the ceiling. 2) Then mount the aluminum rail, after adjusting the height/straightness on the preassembled flange screws, to the wooden beam.

The floor rail is provided with double-sided tape which works on solid flooring. Avoid using the floor rail on rugs, as it will not stay fixed properly.



Sideview of 2-track rail with doors



Sideview of 3-track rail with doors

Add the right amount of fittings for the doors

You always need 1 package of fittings for either the 2-track or 3-track rails. These fittings are used for the doors located on each end of the solution.

If you are using more than 2 doors in your SKYTTA solution, you will also need one package of 'fittings for middle door' for each door placed in the middle of the solution. Here's a table to help you figure out how many packages of fittings you will need.

Amount of doors	Amount of fitting packages for 2-track rail	Amount of fitting packages for middle door
2	1	0
3	0	1
4	1	2
5	1	3
6	1	4


Amount of doors	Amount of fitting packages for 3-track rail	Amount of fitting packages for middle door
2	0	0
3	1	1
4	1	2
5	1	3
6	1	4

How to plan - total depth

Get the right depth

Since SKYTTA runs on rails from floor to ceiling, you can pick and choose what storage solution you want to place behind the doors. Don't forget to add enough space for your storage, as well as the depth of the rails and some extra space. We suggest a minimum of 3 cm (%") between the sliding doors and the storage behind them.

Please note that the ceiling rail is a little deeper than the floor rail, due to the cover parts, as shown in the illustration. For the 2-track rail you need to count 8.1 cm (31/4") depth, and for the 3-track rail you need to count on a depth of 12.2 cm (43/4").




SKYTTA stop bar

Frame your doors with a stop bar

A stop bar is a good way of creating a frame around your sliding doors, as well as providing extra protection for the wall. It can be placed above the base board or fitted in between as the illustration shows.

Don't forget to measure the thickness of your base board, as this can differ between styles and brands. If the base board is thicker than 1.8 cm (34"), we recommend to cut it out and use the stop bar instead, as shown in the illustration.


Our SKYTTA stop bar is available in white and comes in two widths to match the rails. It measures 1.8 cm ($\frac{3}{1}$ ") thick and 240 cm ($\frac{94}{2}$ ") high with the possibility to cut to desired height.

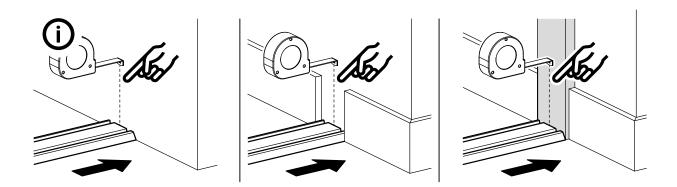

It's possible to use the doors without the SKYTTA stop bar as shown in this illustration or use a customized solution. Keep in mind that walls can be slightly uneven if you let the doors run against the wall, which can cause gaps.

Cut the base board and crown molding so that the stop bar fits between the floor and ceiling. The stop bar could be placed above the base board, in wich case you need to measure the base board as the thickness can vary between styles and brands.

How to build with ceiling height reducer

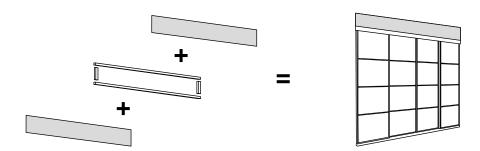

Is your ceiling higher than the SKYTTA sliding doors? No worries. The ceiling height reducer will help you bridge the gap. Use them above your doors and complete with cover panels that you can paint to match.

The ceiling height reducer can be mounted above the SKYTTA sliding doors to bridge the gap, if your ceiling height is up to 36.5 cm (14%") higher than the doors.

Complete the ceiling height reducer with SKYTTA cover panel on each side and paint it to match your room. Or use pre-finishedcover panels from our kitchen range, available in a variety of colours.

All parts and prices


Overall size: Width×Depth×Height.



SKYTTA sliding door frame. Complete each door with one package of panels.


102-106		(401/8×771/8")
102×196	cm	(4U½×//½°)

Aluminum	604.977.33
Black	404.977.34
White	104.977.35
102×231 cm (401/4×91")	
Aluminum	904.977.36
Black	704.977.37
White	504.977.38
77×196 cm (30¾×77½")	
Aluminum	004.977.26
Black	804.977.27
White	604.977.28
77×231 cm (30%×91")	
Aluminum	404.977.29
Black	804.977.32
White	004.977.31






305.000.63	2 tracks
704.670.85	3 tracks
	Black
205.126.41	2 tracks
805.126.43	3 tracks
	White
405.126.40	2 tracks
005.126.42	3 tracks
005.	3 tracks




for 2-track rail	105.000.64
for 3-track rail	805.000.65
for middle door	605.000.66







2 tracks	005.132.36
3 tracks	805.132.37



2 tracks	405.000.6
3 tracks	005.110.9

SKYTTA top cover panel. Note! The panel comes in a paper foil that needs to be painted to match your wall.






Combinations

Pick among some ready-made sliding door solutions, or create your own combination of metal frames and panels. The metal frame is available in white, black and aluminum and the panels come in a variety of materials and colours. Choose one package of panels per sliding door frame.

You will find all sliding door frames and panels on our website www.IKEA.ca along with a SKYTTA planner tool to help you out!




Combination with 2 doors and 2-track rail. 2× 77 cm (30%") doors.


SKYTTA/MEHAMN sliding door combination, white. Available in two heights.

Overall size: 152×205 cm (59%×80¾") (094.227.36)

Overall size: 152×240 cm (59%×94½") (894.240.48)



Combination with 4 doors and 2-track rail. 2× 77 cm (30%") and 2× 102 cm (40%"). SKYTTA/HOKKSUND sliding door combination, high-gloss light gray. Available in two heights. Overall size: 301×205 cm (118½×80¾") (794.227.33) Overall size: 301×240 cm (118½×94½") (794.240.44)




Combination with 3 doors and 3-track rail. 3× 77 cm (30%") doors.

SKYTTA/HOKKSUND sliding door combination, high-gloss light gray. Available in two heights.

Overall size: 226×205 cm (89×80%") (694.227.43)

Overall size: 226×240 cm (89×94½") (194.240.42)



Combination with 3 doors and 3-track rail. 3× 102 cm (40%") doors.

SKYTTA/HOKKSUND sliding door combination, high-gloss light gray. Available in two heights.

Overall size: 301×205 cm (118½×80¾") (094.227.41)

Overall size: 301×240 cm (118½×94½") (994.240.43)

Combinations




Combination with 4 doors and 2-track rail. $3\times$ 77 cm (30%") and $1\times$ 102 cm (40%") doors. SKYTTA/FÄRVIK sliding door combination,


white glass. Available in two heights. Overall size: 326×205 cm (128¾×80¾") (294.227.35) Overall size: 326×240 cm (128¾×94½")

(204 240 41)

(394.240.41)



Combination with 4 doors and 2-track rail. 2× 77 cm (30%") and 2× 102 cm (40%") doors. SKYTTA/SVARTISDAL sliding door combination, white paper effect glass. Available in two heights. Overall size: 351×205 cm (138¼×80¾") (294.227.40) Overall size: 351×240 cm (138¼×94½") (694.240.49)



Combination with 4 doors and 2-track rail. 4× 102 cm (40%") doors.

SKYTTA/MEHAMN/AULI sliding door combination, white-stain oak and mirror glass. Available in two heights. Overall size: 401×205 cm (157%×80¾") (894.227.42)

Overall size: 401×240 cm (157%×94½") (094.240.47)

All combinations below have a 2.5 cm (1") overlap and do not have a stop bar. If a stop bar is used on both sides, this adds 3.6 cm (1%") to the total width. The minimum overlap is 2.5 cm (1"). These combinations use a small door width of 77.1 cm (30%) and a wide door width of 102.1 cm (40%).


If the total width is reduced, the opening will reduce by just as much and the overlap will increase.

The maximum overlap depends on what is being stored behind the doors and the visual aspect. The recommendation is to have as little overlap as possible.

Combination with 2 doors and the 2-track rail


2× 77.1 cm (30%") doors.

total width 151.7 cm (59¾"), opening width 74.6 cm (29¾")




Combination with 2 doors and the 2-track rail

2× 102.1 cm (401/4") doors, total width 201.7 cm (79%"), opening width 99.6 cm (391/4")



Combination with 4 doors and the 2-track rail 3×77.1 cm (30%") and 1×102.1 cm (40%") doors,

total width 325.9 cm (128%"), opening width 146.7 cm (573/4")









Combination with 2 doors and the 2-track rail

1× 77.1 cm (30%") and 1× 102.1 cm (401/4") doors, total width 176.7 cm (69%"), opening width 74.6 cm (29%")



Combination with 4 doors and the 2-track rail


4× 77.1 cm (30%") doors,








Combination with 4 doors and the 2-track rail.


2×77.1 cm (30%") and 2× 102.1 cm (401/4") doors total width 350.9 cm (1381/4"), opening width 171.7 cm (675/8")




























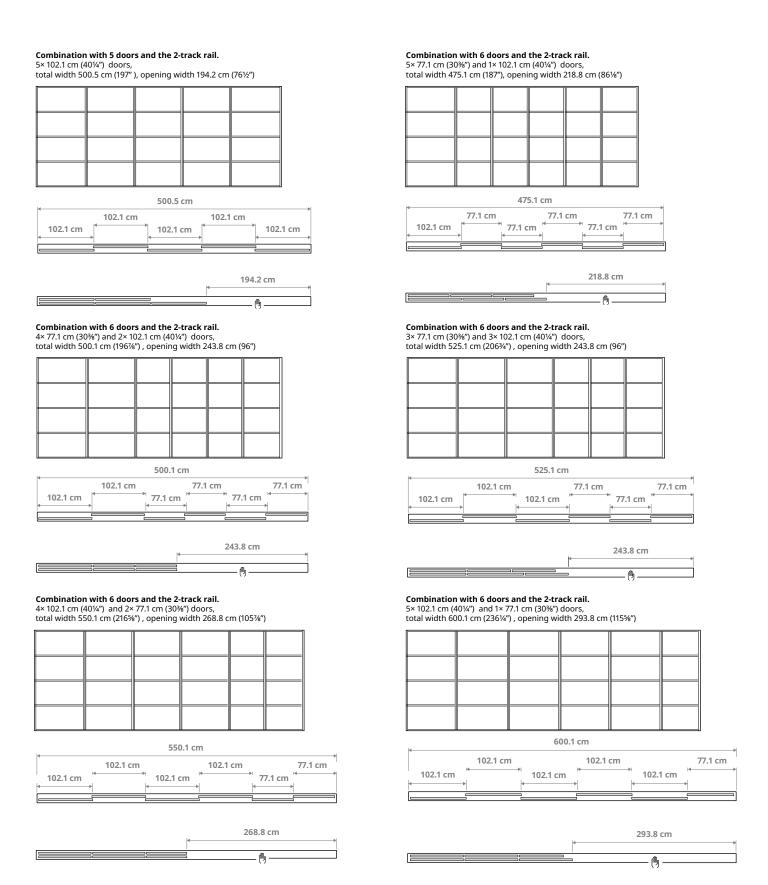


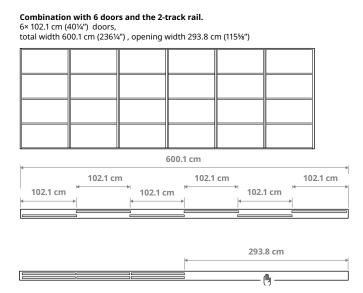

Combination with 3 doors and the 3-track rail.


3× 77.1 cm (30%") doors, total width 226.3 cm (89%"), opening width 149.2 cm (58¾")






Combination with 3 doors and the 3-track rail.


1× 77.1 cm (30%") and 2× 102.1 cm (40%") doors, total width 276.3 cm (108%") , opening width 174.2 cm (68%")






Combination with 5 doors and the 3-track rail. $4\times$ 77.1 cm (30%") and $1\times$ 102.1 cm (40%") doors, total width 400.5 cm (157%"), opening width 246.3 cm (97")









Combination with 3 doors and the 3-track rail.


2×77.1 cm (30%") and 1×102.1 cm (401/4") doors, total width 251.3 cm (98%") , opening width 149.2 cm (5834")







Combination with 3 doors and the 3-track rail.

3× 102.1 cm (40%") doors, total width 301.3 cm (118%") , opening width 199.2 cm (78%")






Combination with 5 doors and the 3-track rail. $3\times$ 77.1 cm (30%") and $2\times$ 102.1 cm (40%") doors, total width 425.5 cm (167%"), opening width 246.3 cm (97")











 $2\times$ 77.1 cm (30%") and $3\times$ 102.1 cm (40%") doors, total width 450.5 cm (177%") , opening width 271.3 cm (106%")





Combination with 6 doors and the 3-track rail.

5× 77.1 cm (30%") and 1× 102.1 cm (40¼") doors, total width 477.6 cm (188") , opening width 298.4 cm (117½")









Combination with 6 doors and the 3-track rail.

 $4\times$ 77.1 cm (30%") and $2\times$ 102.1 cm (40%") doors, total width 502.6 cm (197%"), opening width 323.4 cm (127%")








Combination with 5 doors and the 3-track rail.

1× 77.1 cm (30%") and 4× 102.1 cm (40¼") doors, total width 475.5 cm (187¼"), opening width 217.3 cm (106¾")









Combination with 5 doors and the 3-track rail.

 $5 \times 77.1 \, cm \, (30\%'') \, doors,$ total width 500.5 cm (197") , opening width 296.3 cm (116\%'')









Combination with 6 doors and the 3-track rail.


3× 77.1 cm (30%") and 3× 102.1 cm (40%") doors, total width 527.6 cm (207%"), opening width 348.4 cm (137%")







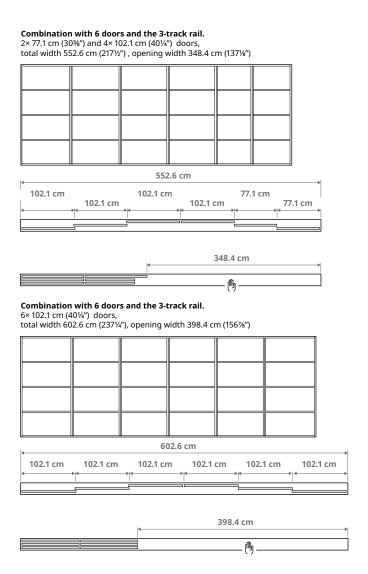

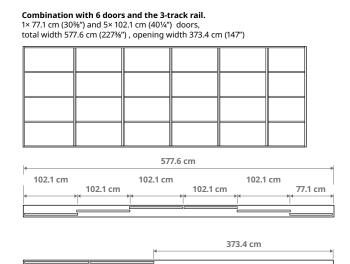

Services

IKEA products are designed to be taken home and assembled yourself. But if you would like some help, we can offer you a range of services.

Talk to a co-worker or visit www.IKEA.ca/services for further details and pricing.

Home delivery

Most of our products are designed and packaged so that you can take them home yourself, but if you prefer, we can deliver your purchases directly to your home or office. Prices are based on the distance to your home from the store.

Picking and delivery

With our fantastic new Picking and Delivery service, we do all the heavy lifting for you! We'll collect the furniture on your shopping list from the self-serve area and deliver everything to your home or office.