


MAJSJÖN



Design and Quality
IKEA of Sweden

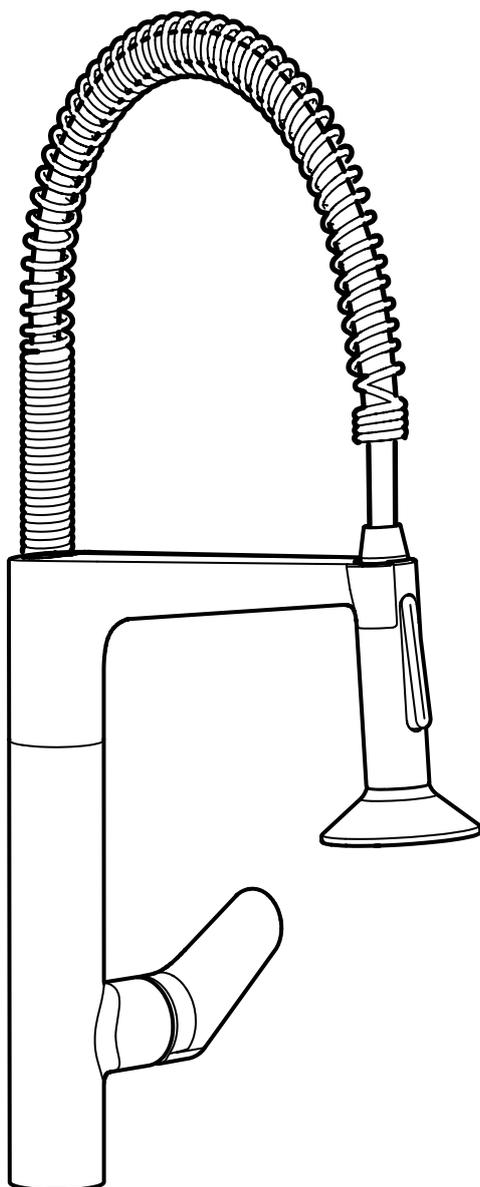




English


Installation must be performed in compliance with current local construction and plumbing regulations. If in doubt, contact a professional.




English


Switch off main shut-off valve before changing mixer tap.

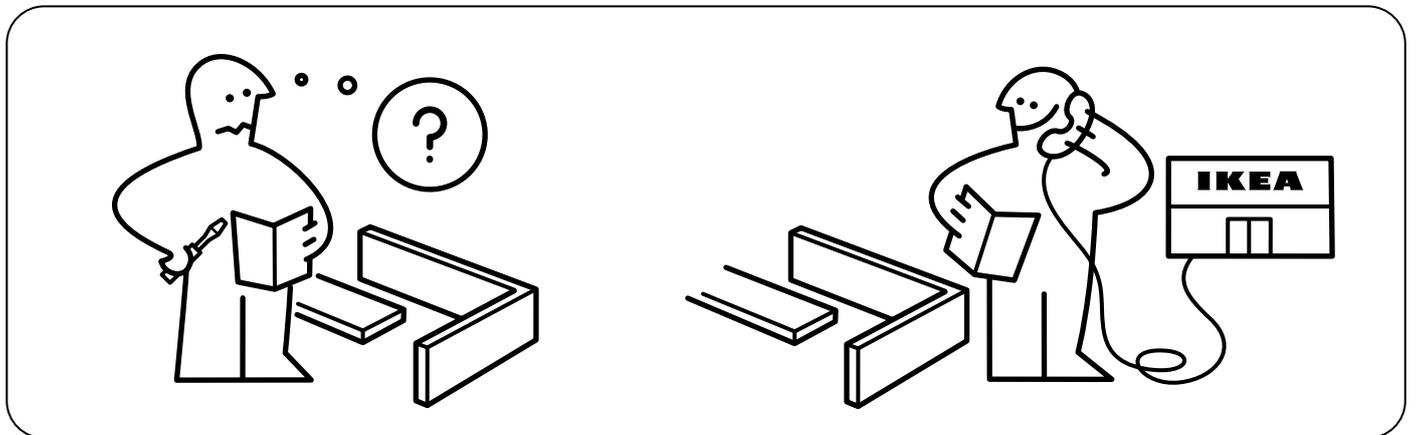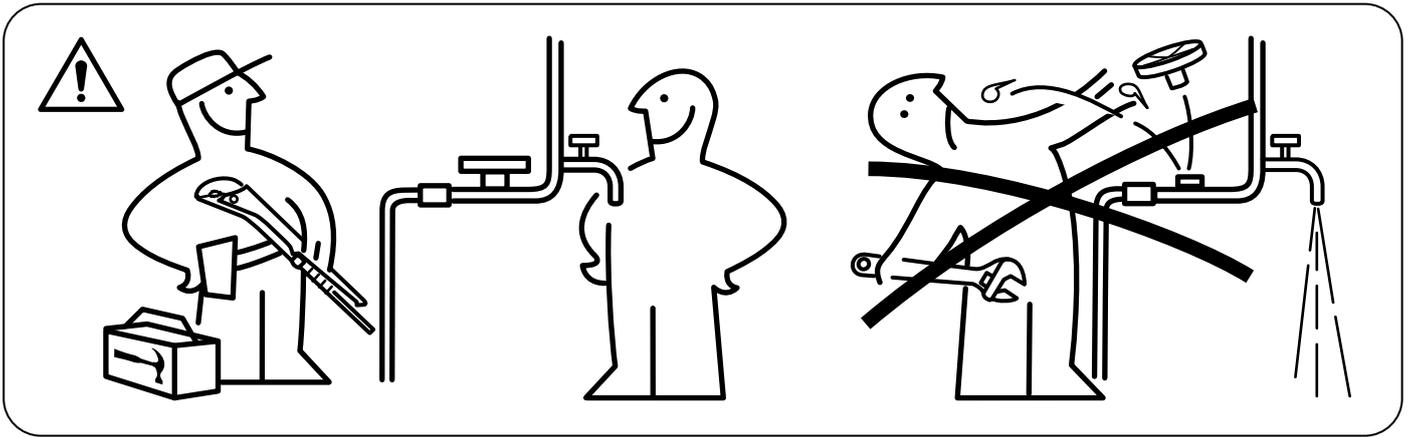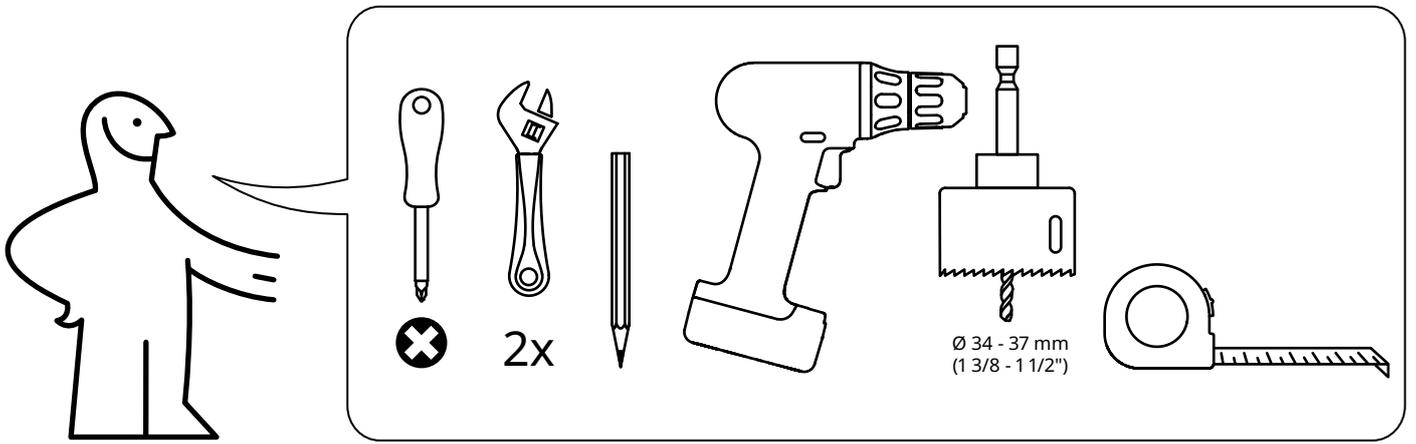

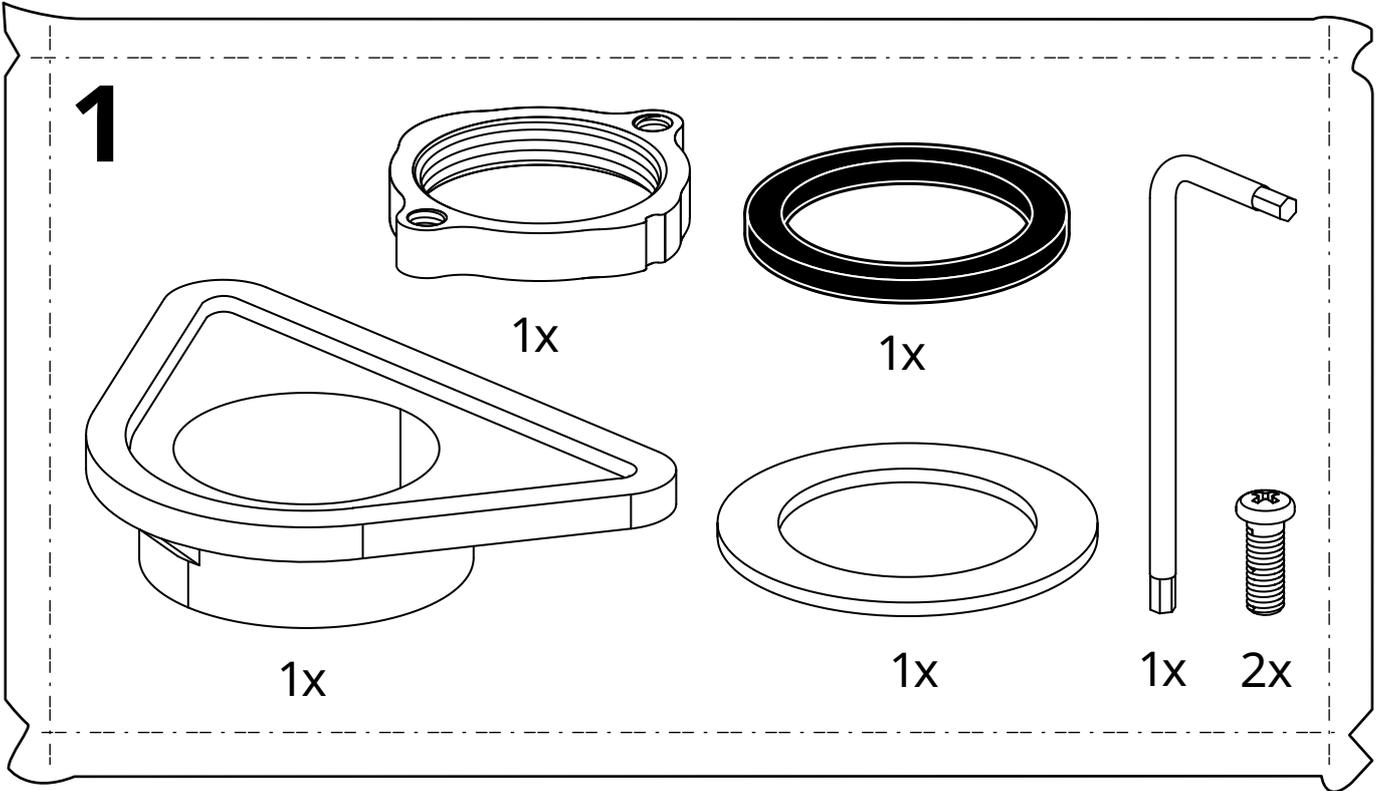

10140225

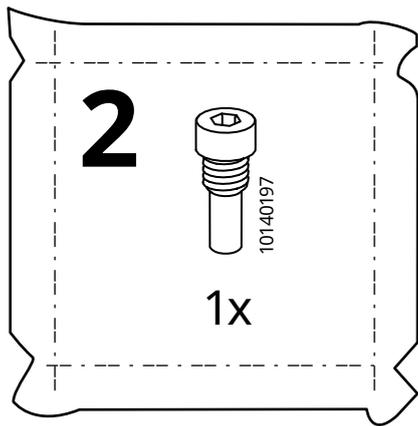





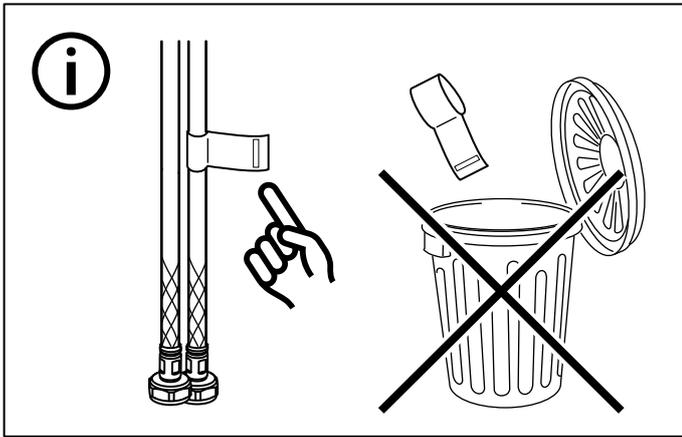







The diagram includes an information icon, a vertical temperature gauge, and a circular pressure gauge. The temperature gauge shows a scale from 0 to 100 degrees Celsius and 0 to 145 degrees Fahrenheit. The pressure gauge shows a scale from 0 to 10 bar and 0 to 145 psi.

60°C
140°F
(Max. 80°C
Max. 176°F)


1 - 5 bar
14.5 - 72.5 psi
(1 - 10 bar
14.5 - 145 psi)


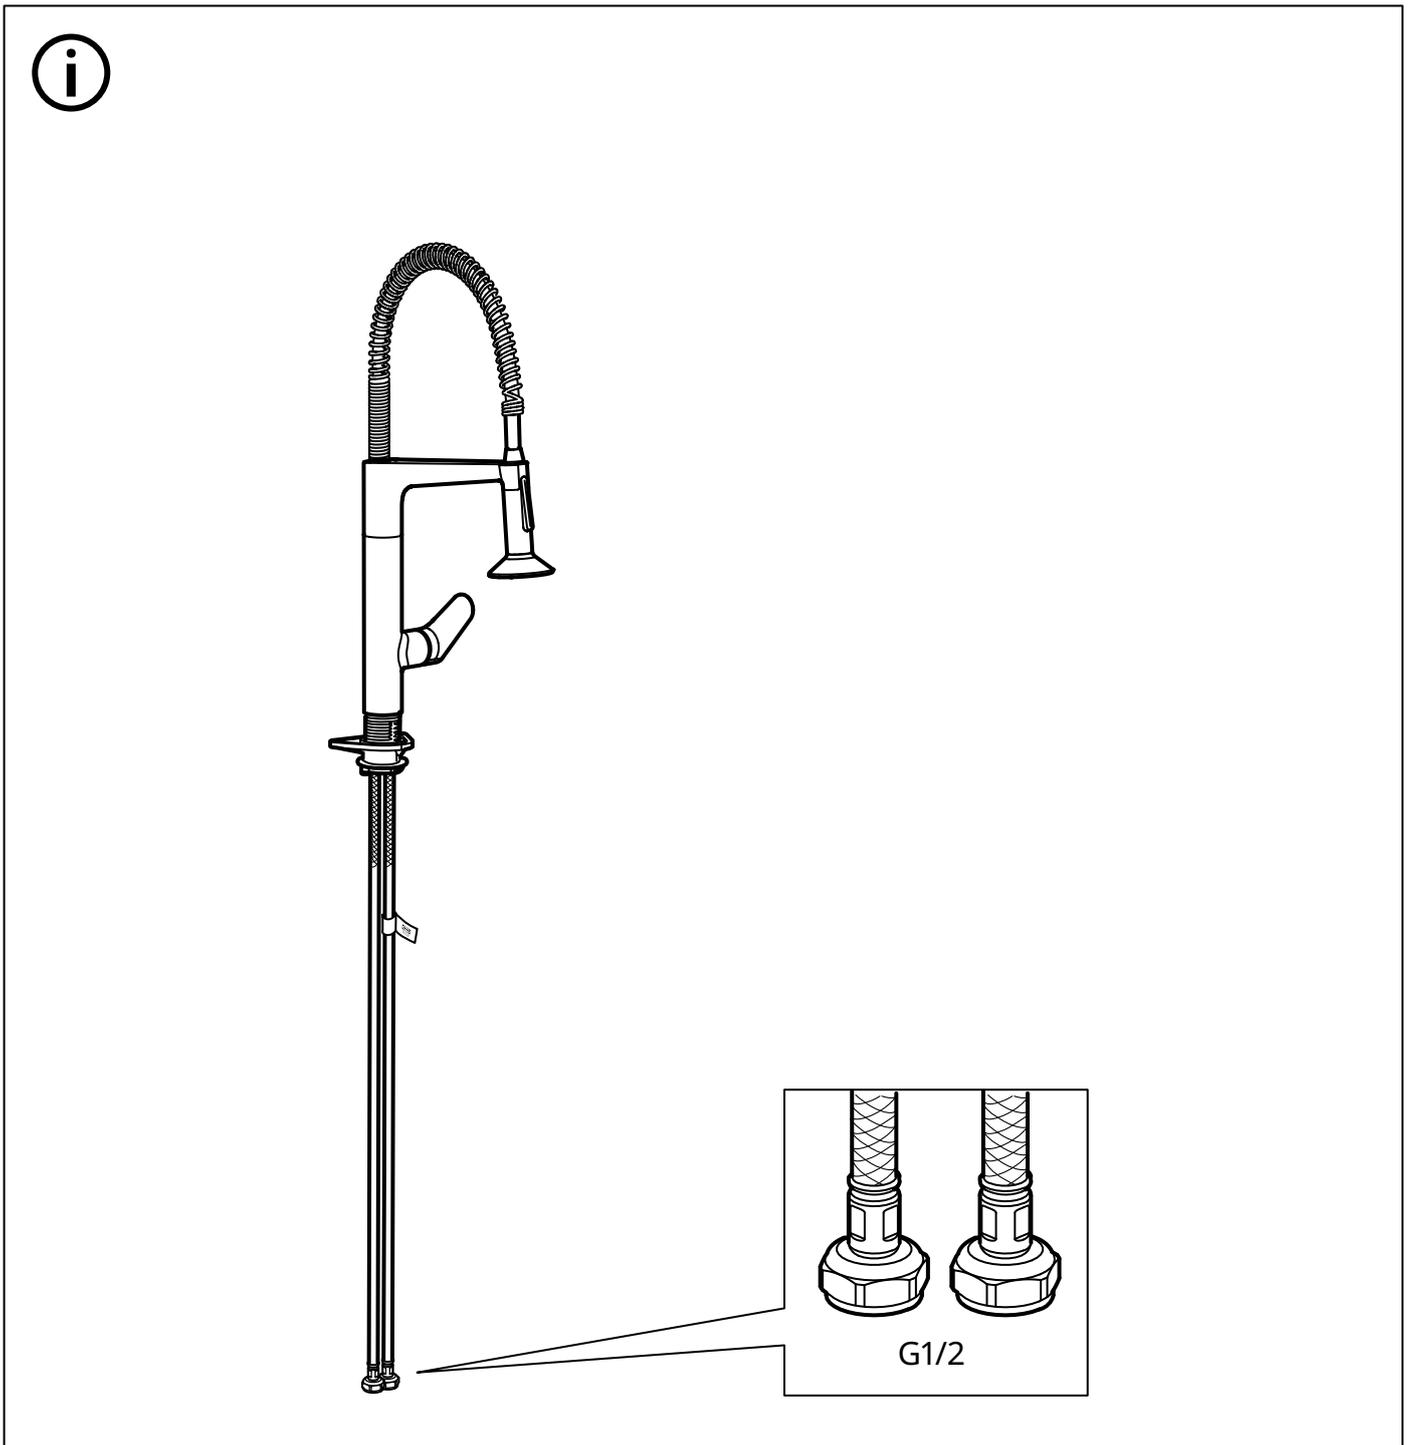


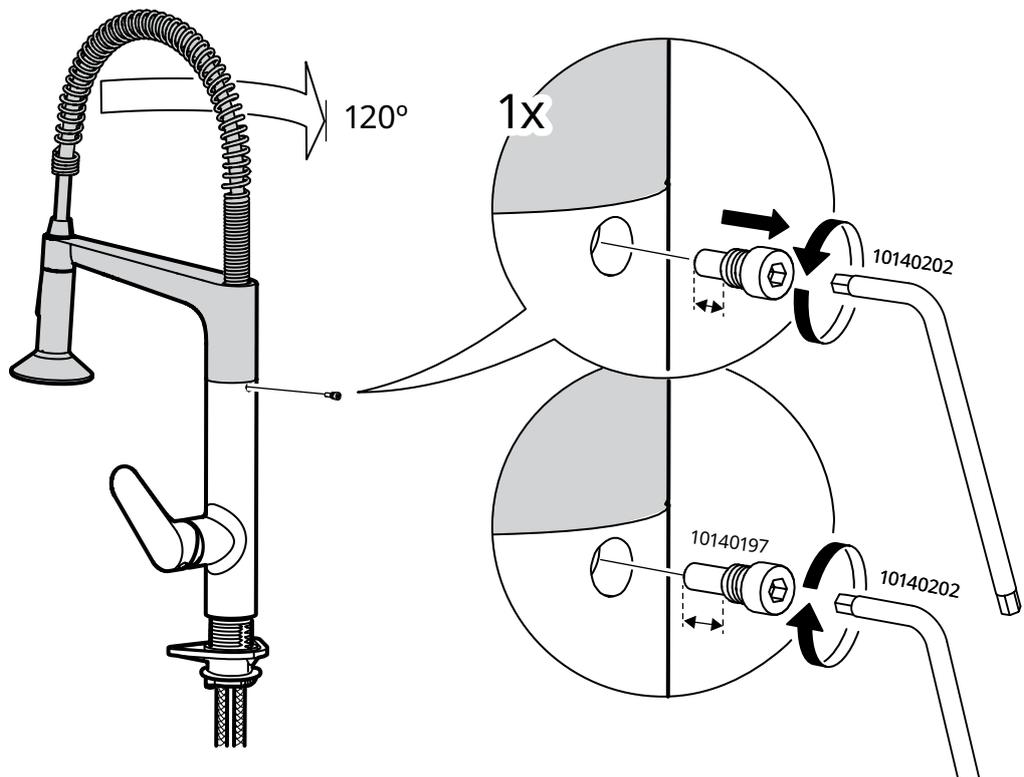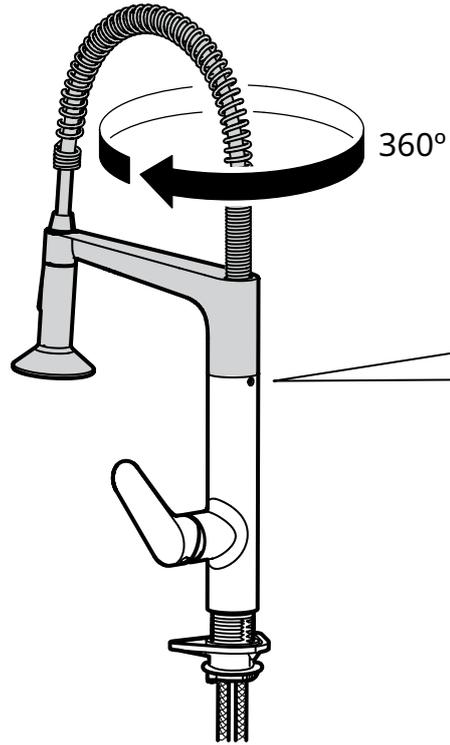

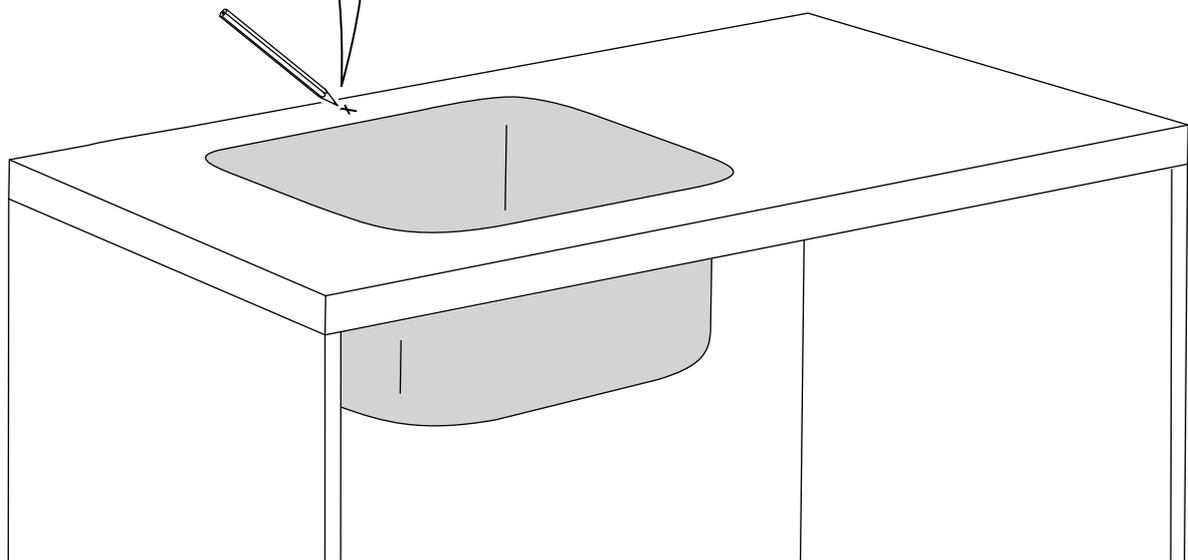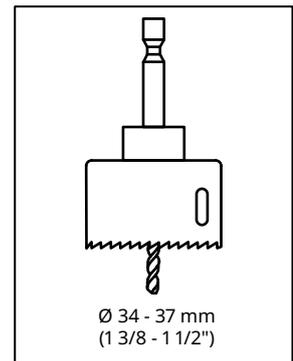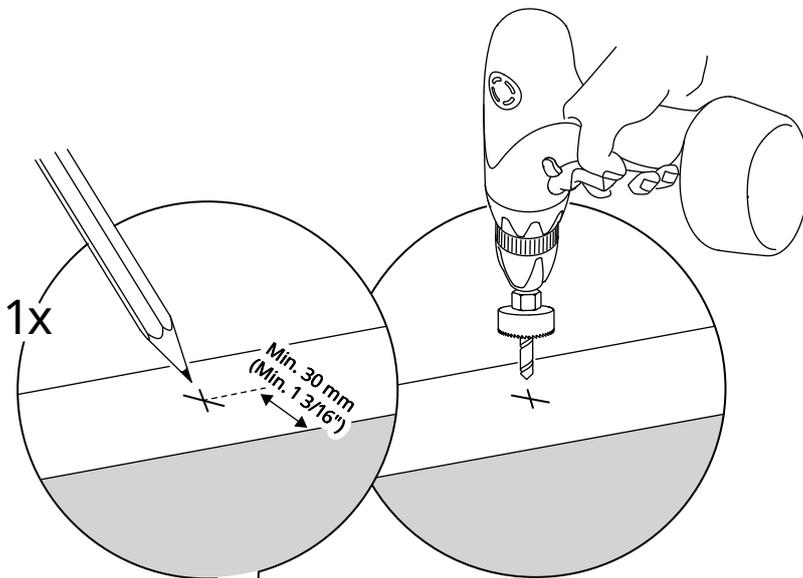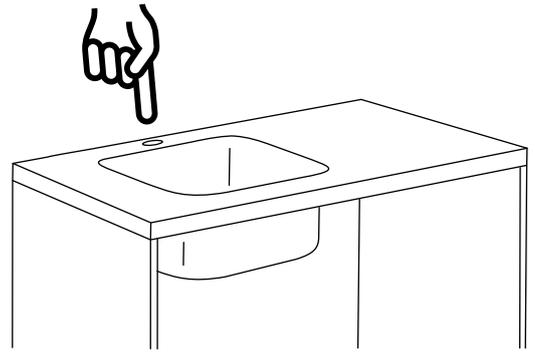
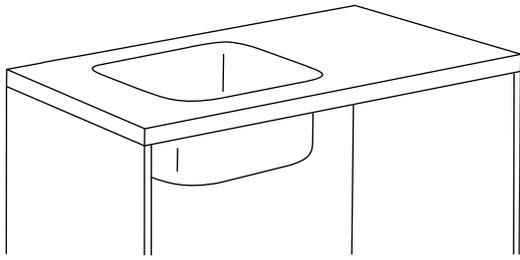


1


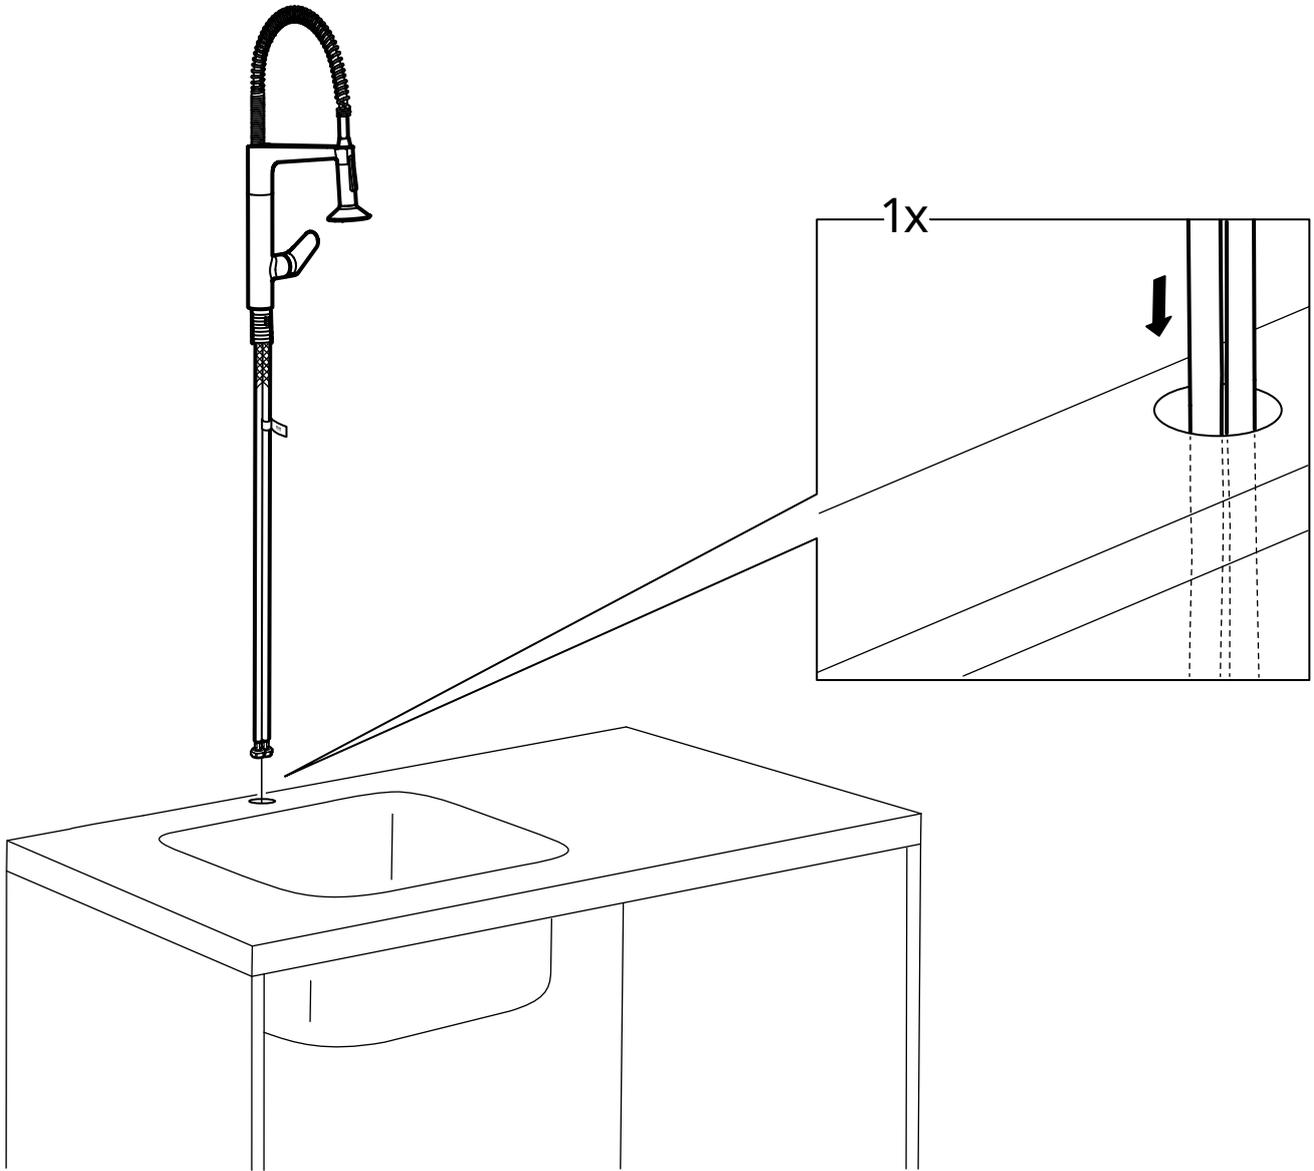


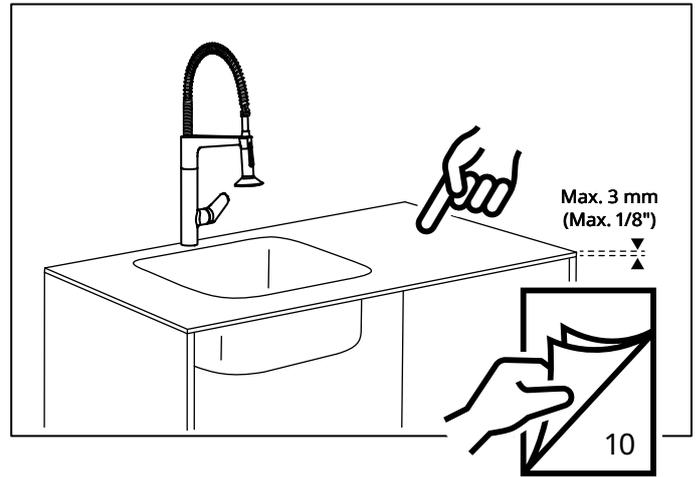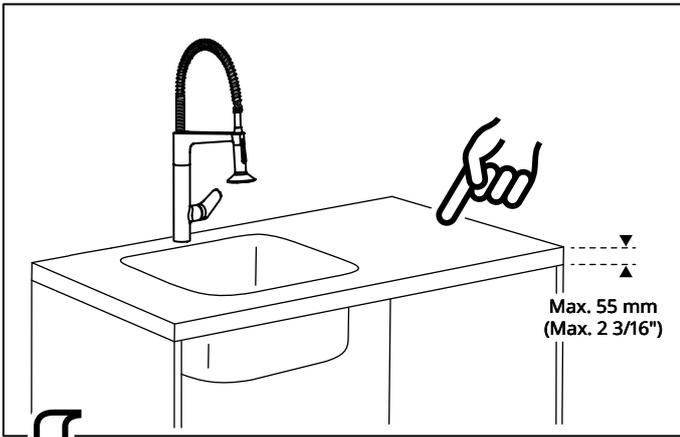


2

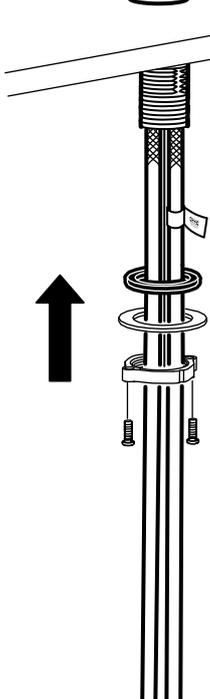
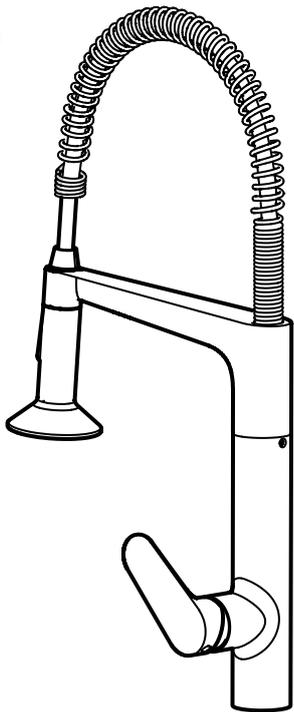


1x

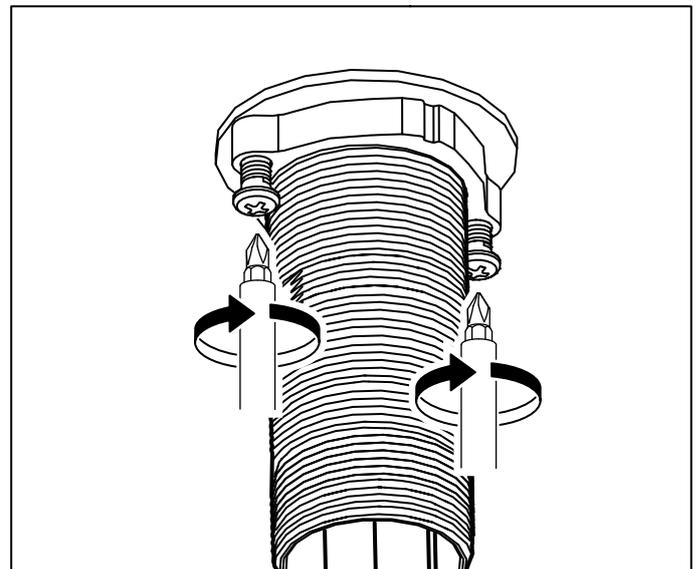
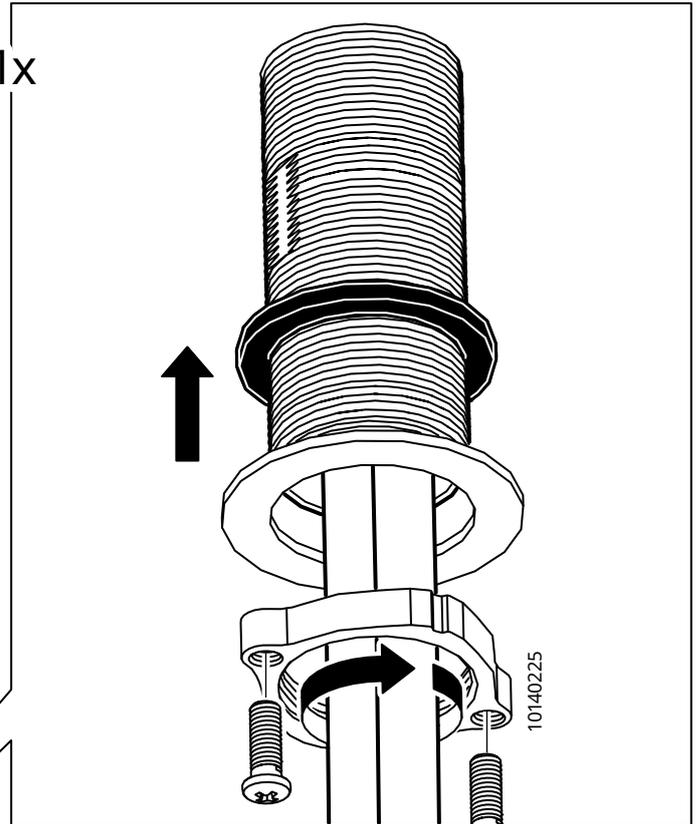


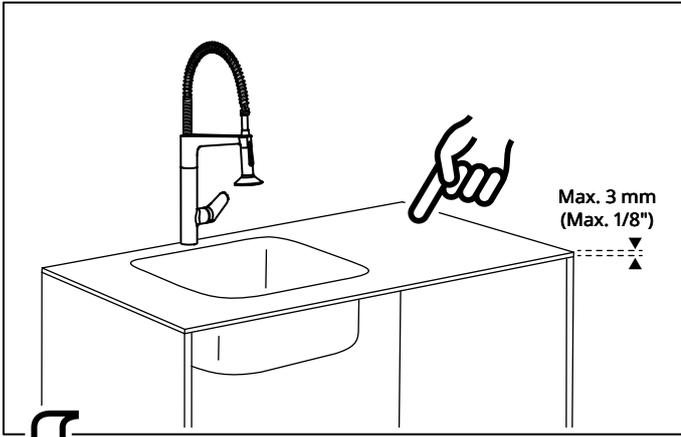



2

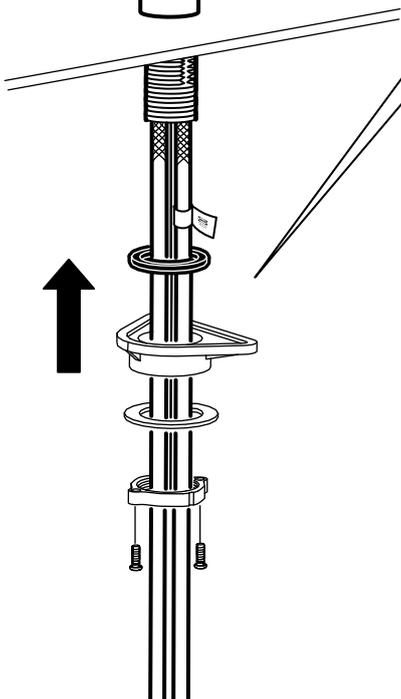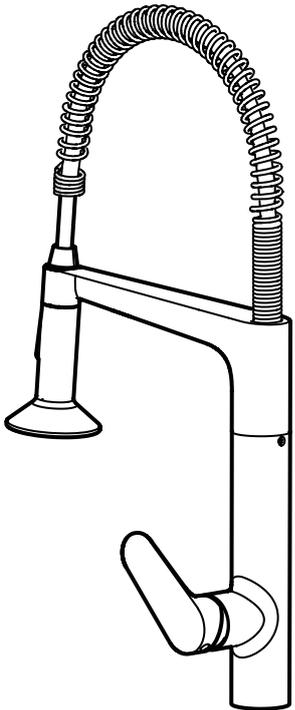



1x

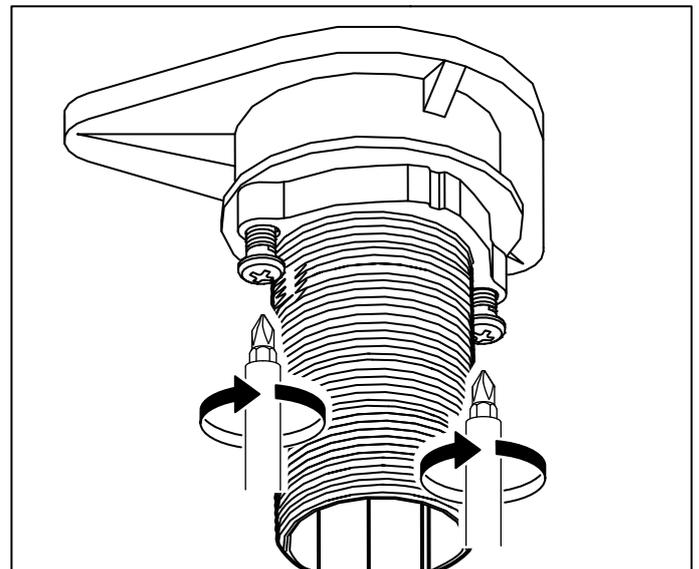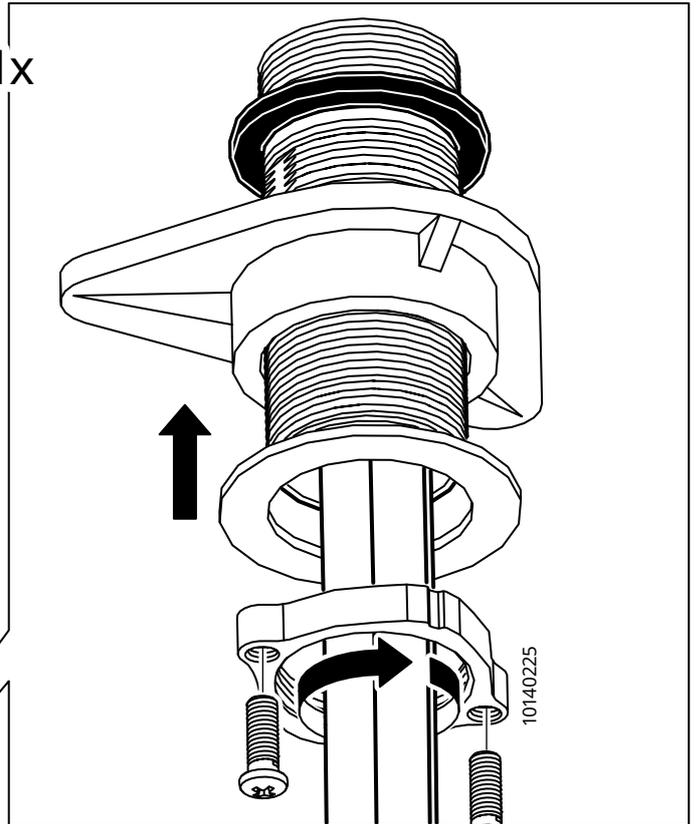


3

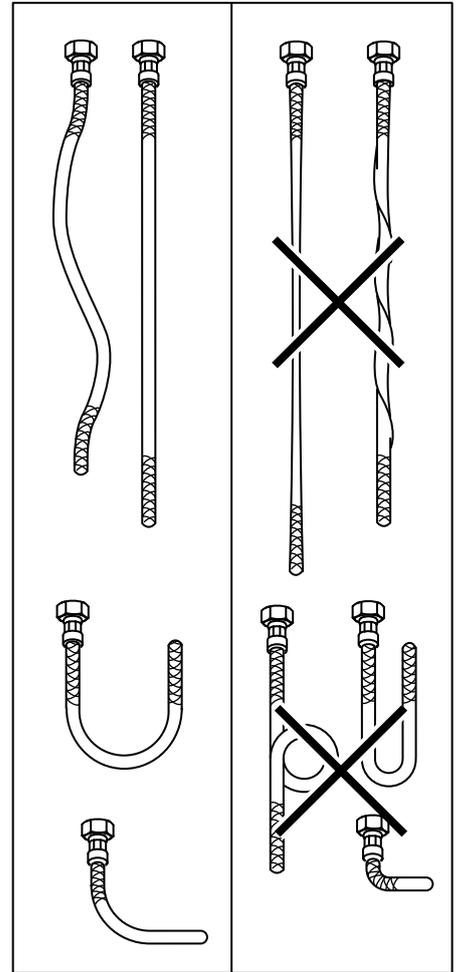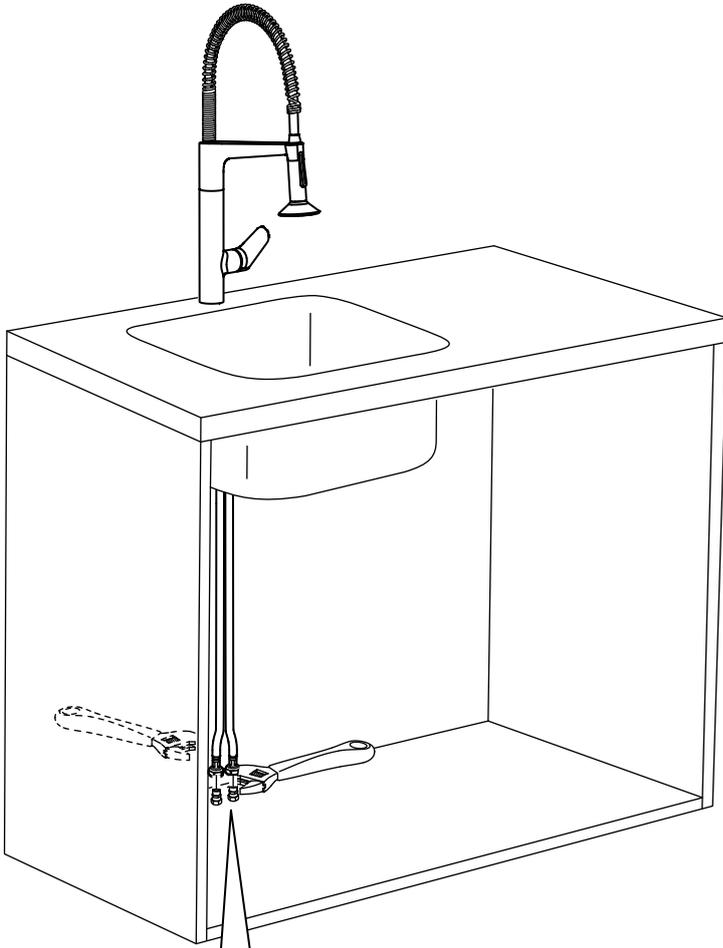

2x

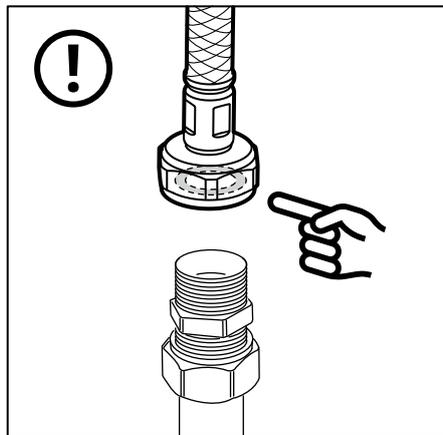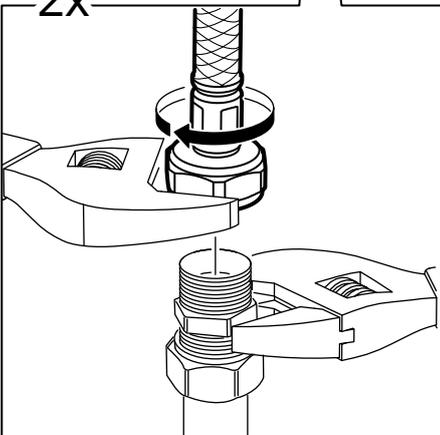

English
IMPORTANT! Do not tighten too hard: this can damage hoses/pipes and washers.

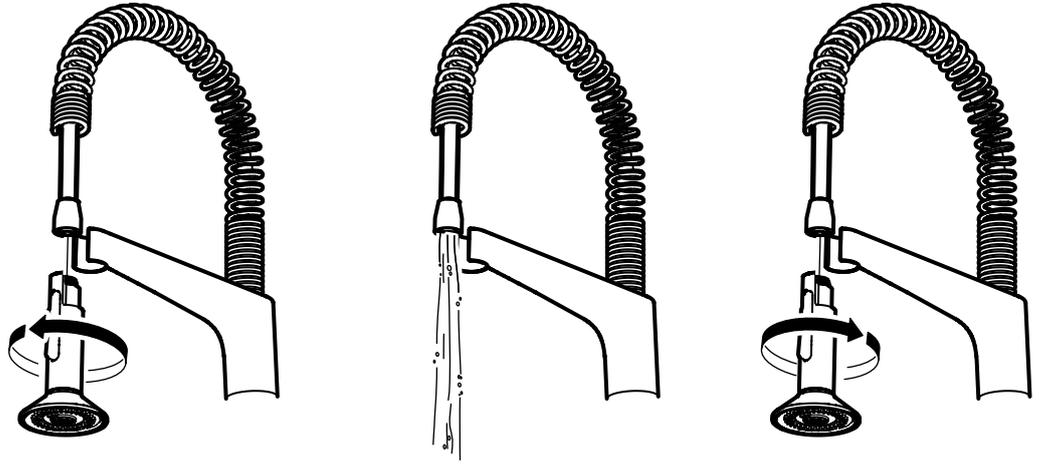

English

Before use: Unscrew the Aerator/Flow Guide and allow the water to run freely for a few minutes. Then screw the Aerator/Flow Guide back in place. Ensure that it is tight to prevent removal by hand.



English

Check at regular intervals to make sure that the installation is not leaking.

