


MAJSJÖN



Design and Quality
IKEA of Sweden

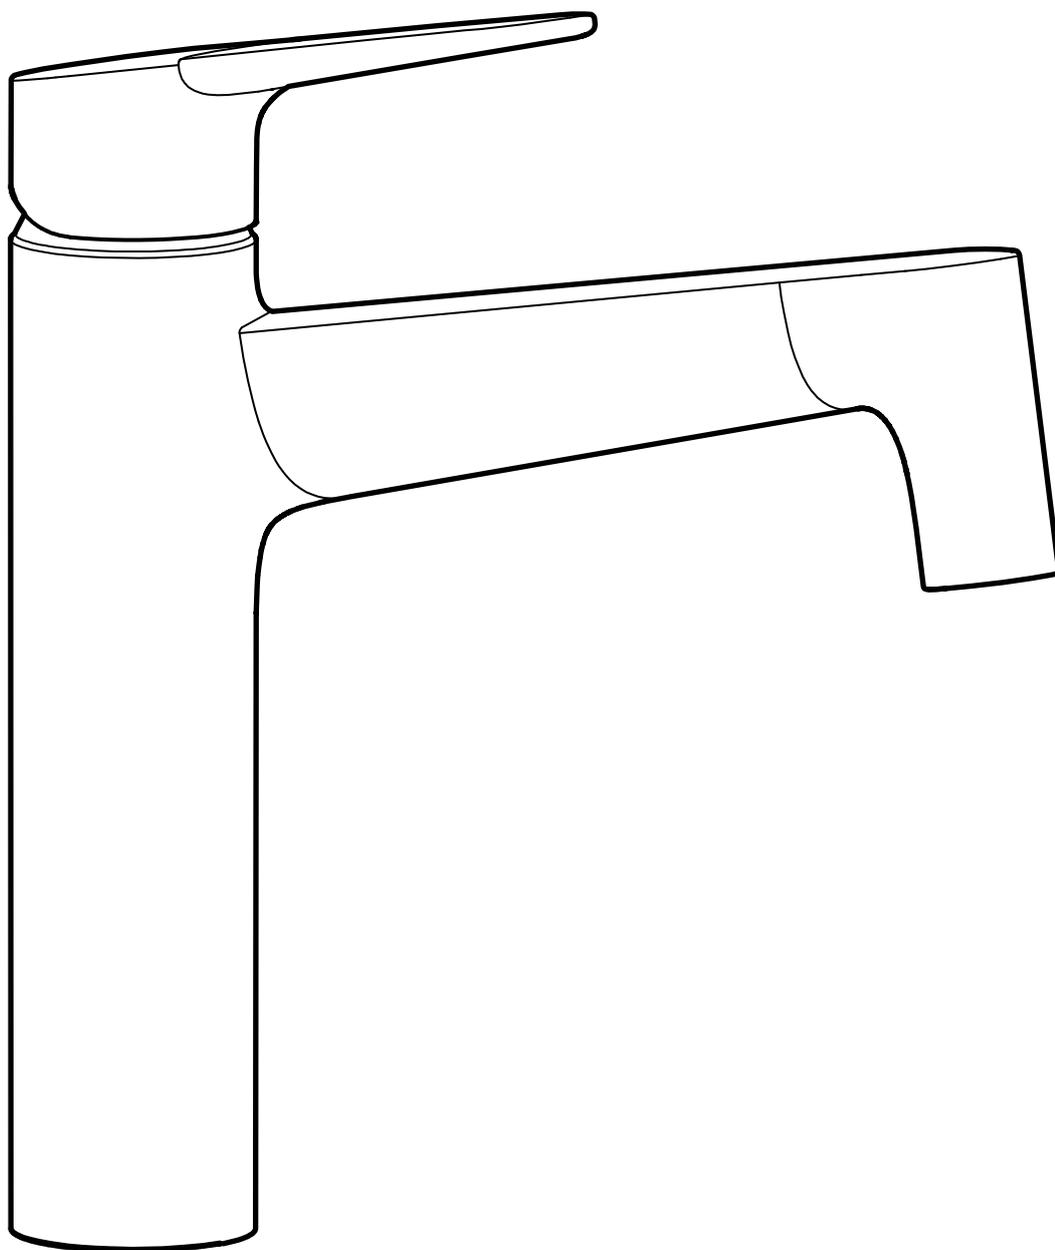




English

Installation must be performed in compliance with current local construction and plumbing regulations. If in doubt, contact a professional.




English


Switch off main shut-off valve before changing mixer tap.

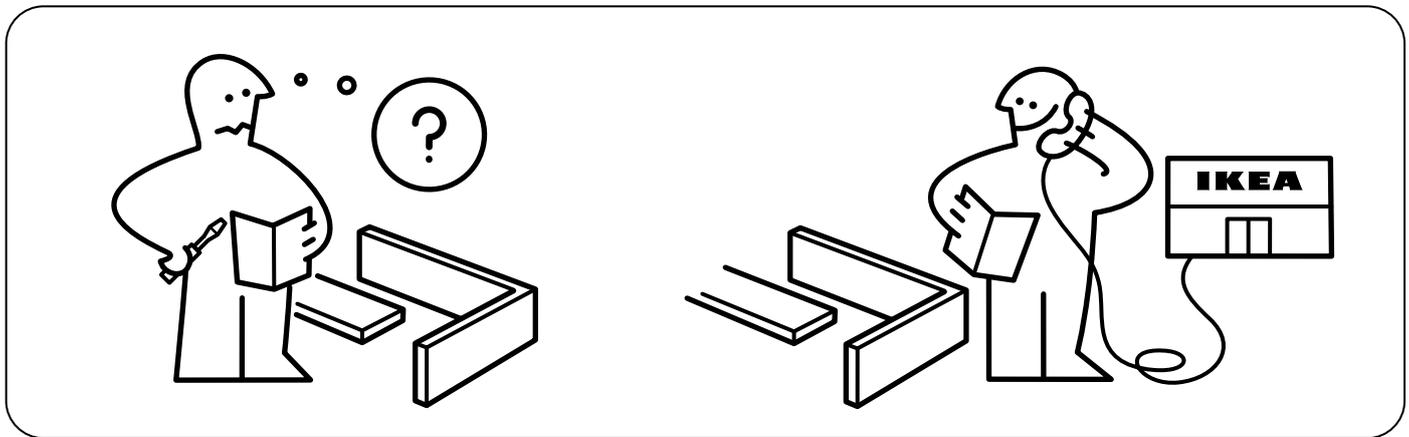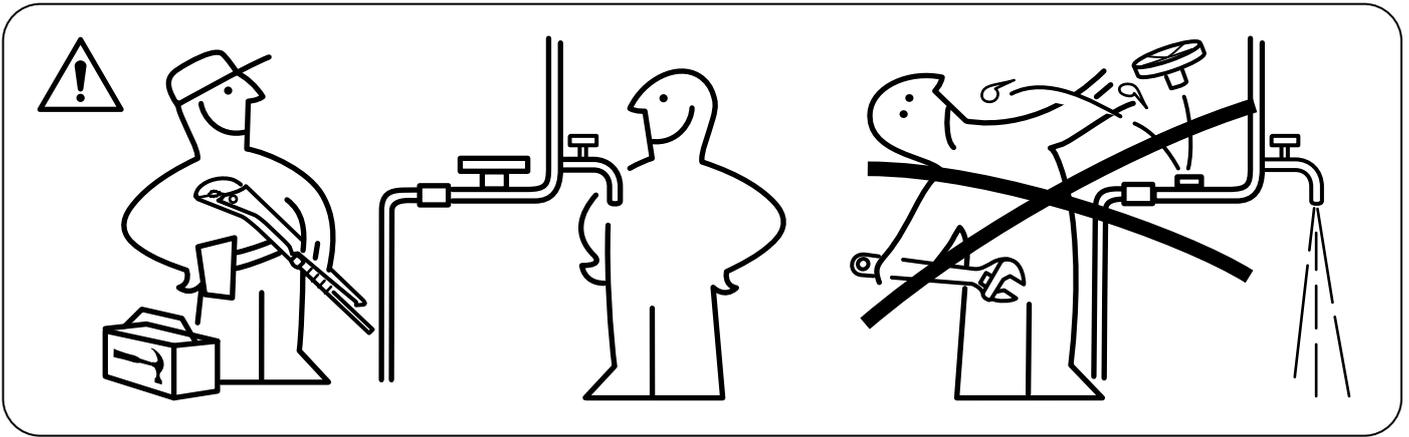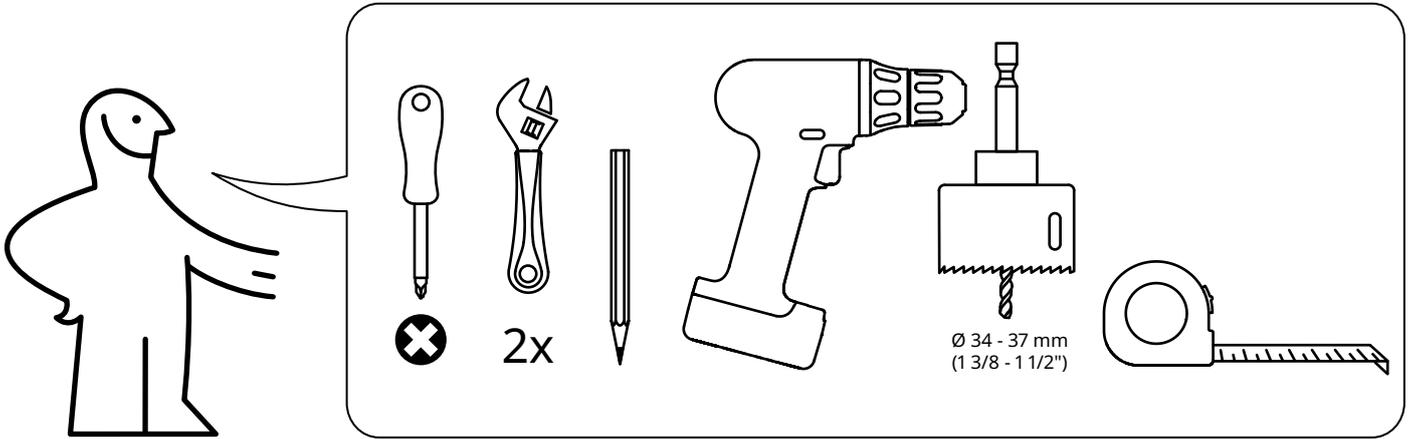


1

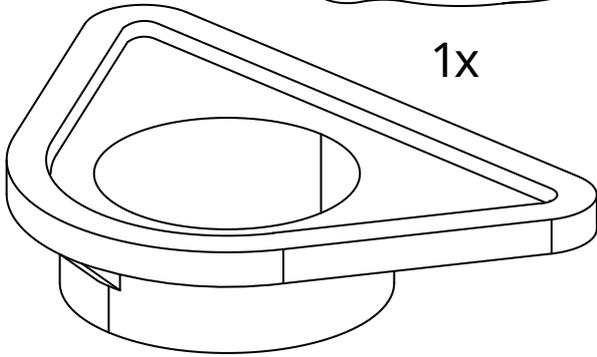


1x




1x




1x

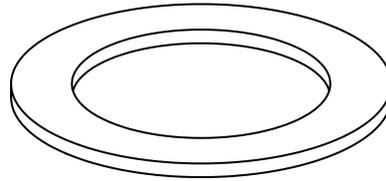

1x

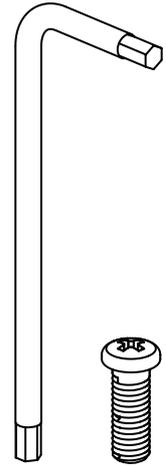


1x



2x


10140225




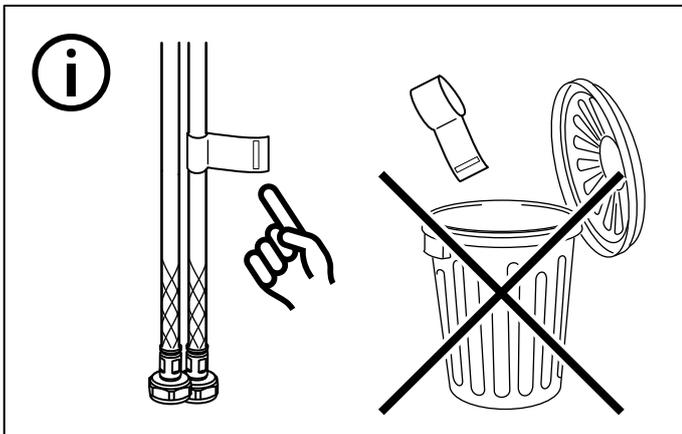


The diagram includes a thermometer and a pressure gauge. The thermometer shows a scale from 0 to 140 degrees Celsius and 0 to 145 degrees Fahrenheit. The pressure gauge shows a scale from 0 to 10 bar and 0 to 145 psi.


60°C
140°F
(Max. 80°C
Max. 176°F)



1 - 5 bar
14.5 - 72.5 psi
(1 - 10 bar
14.5 - 145 psi)

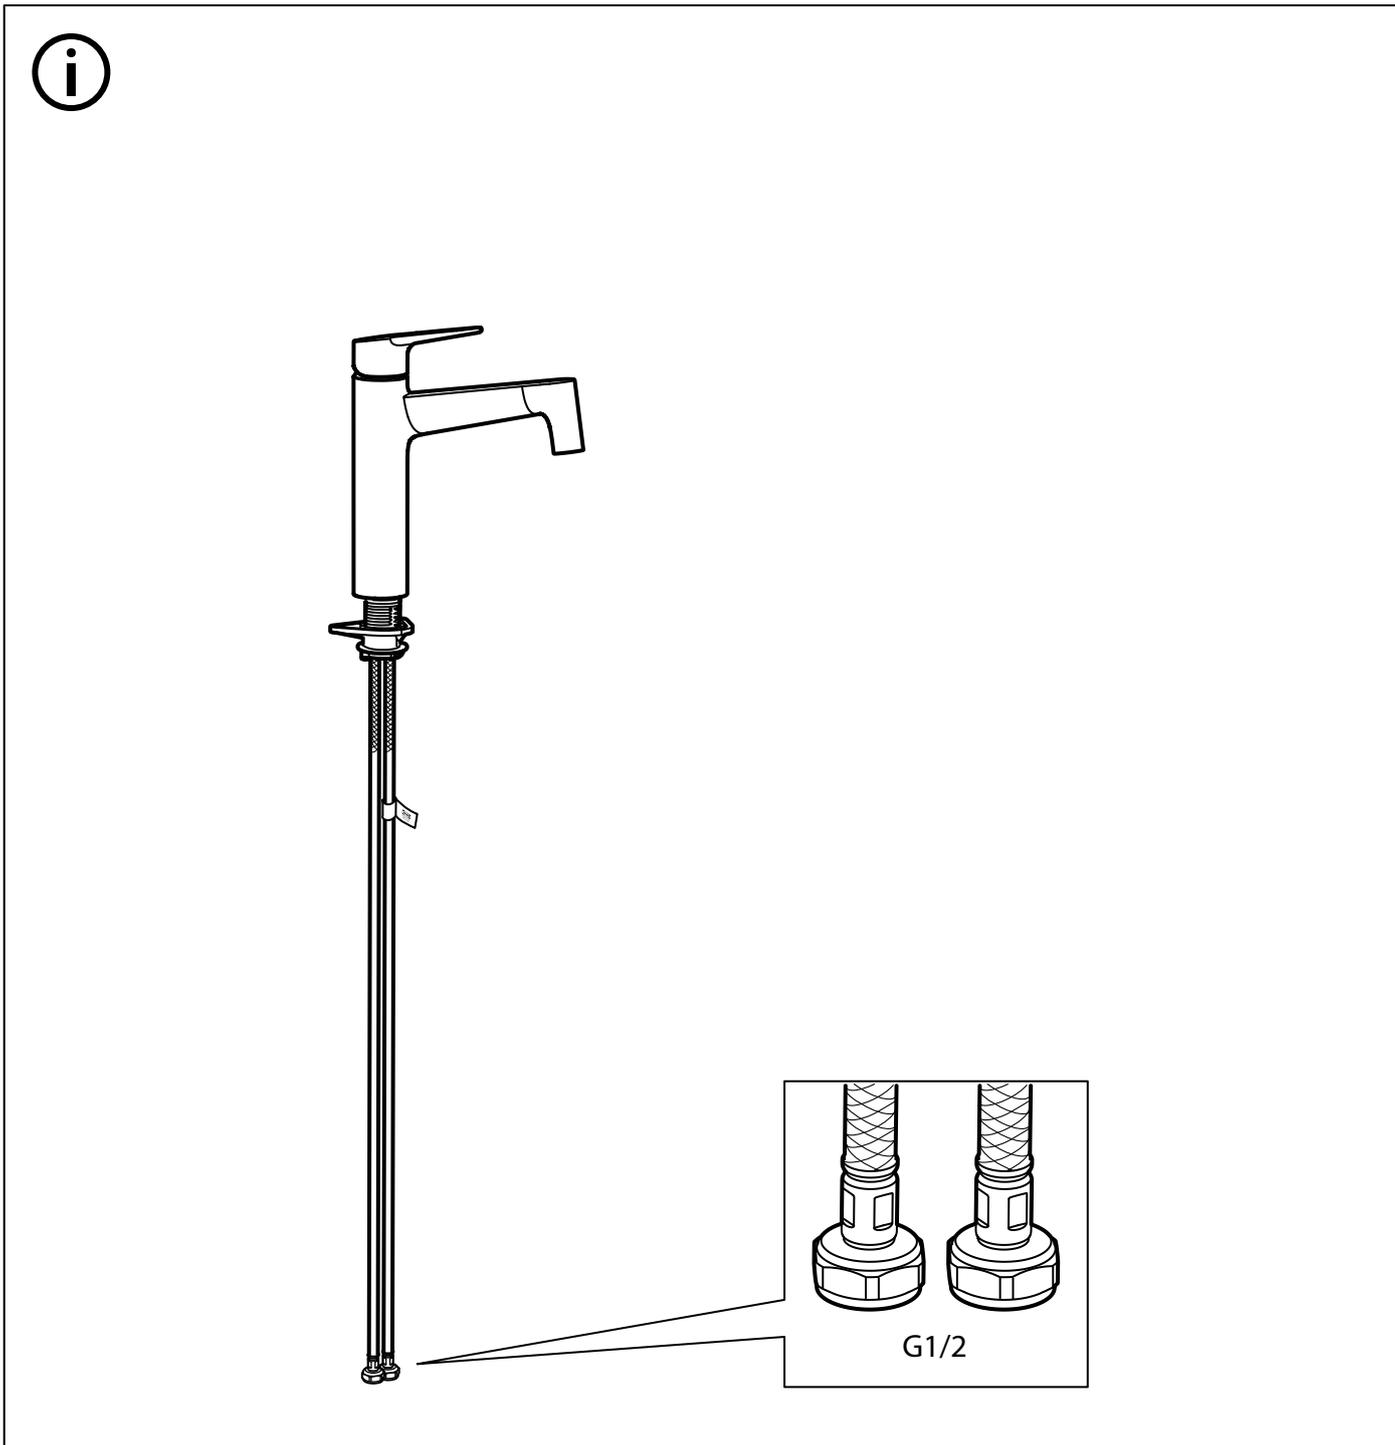

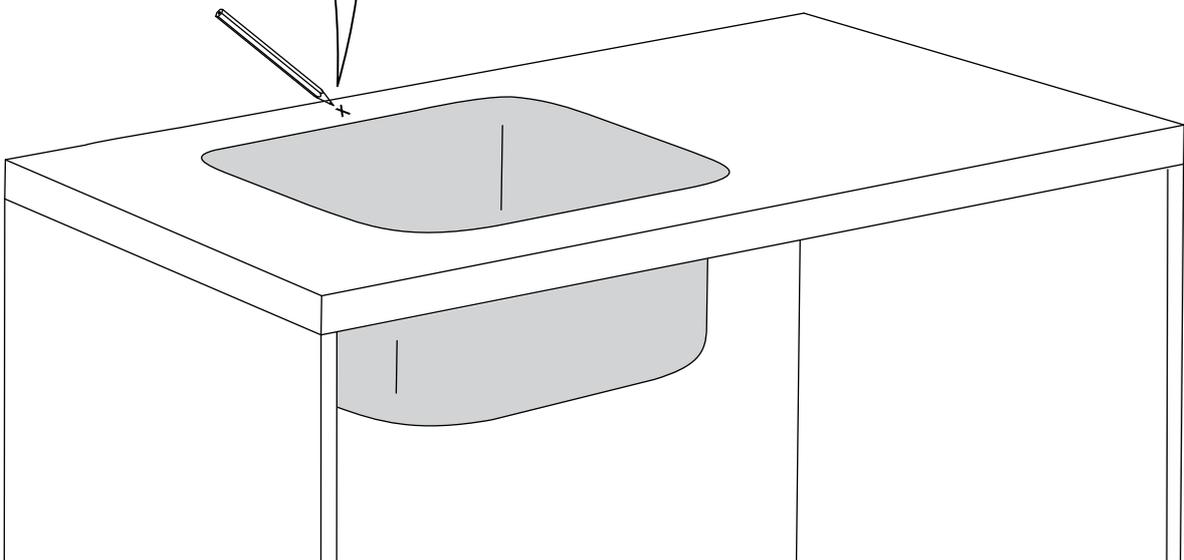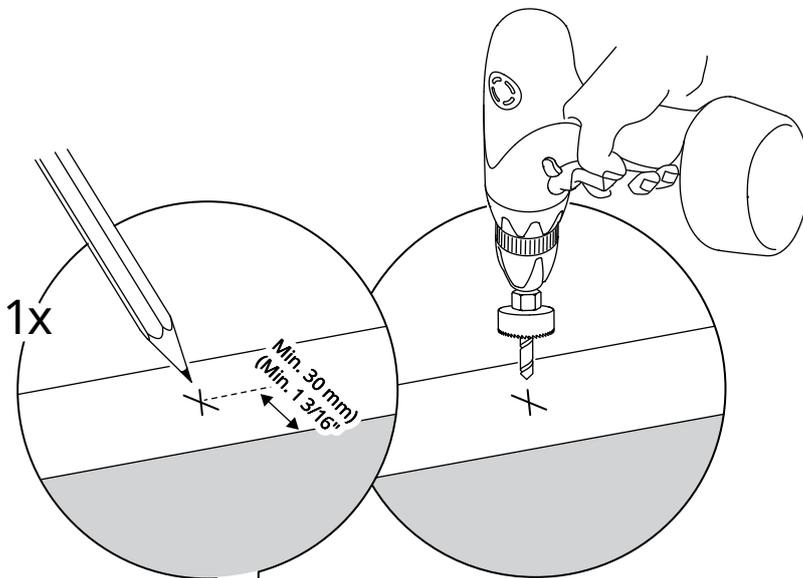
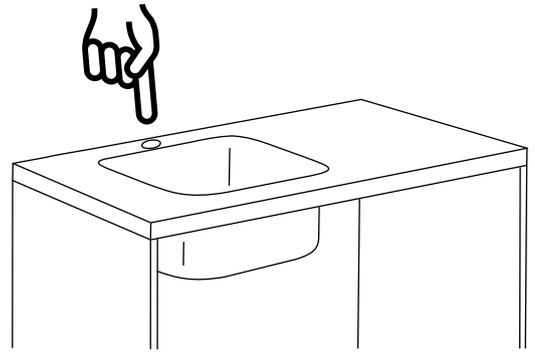
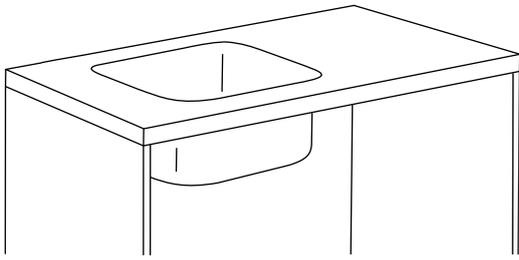


1


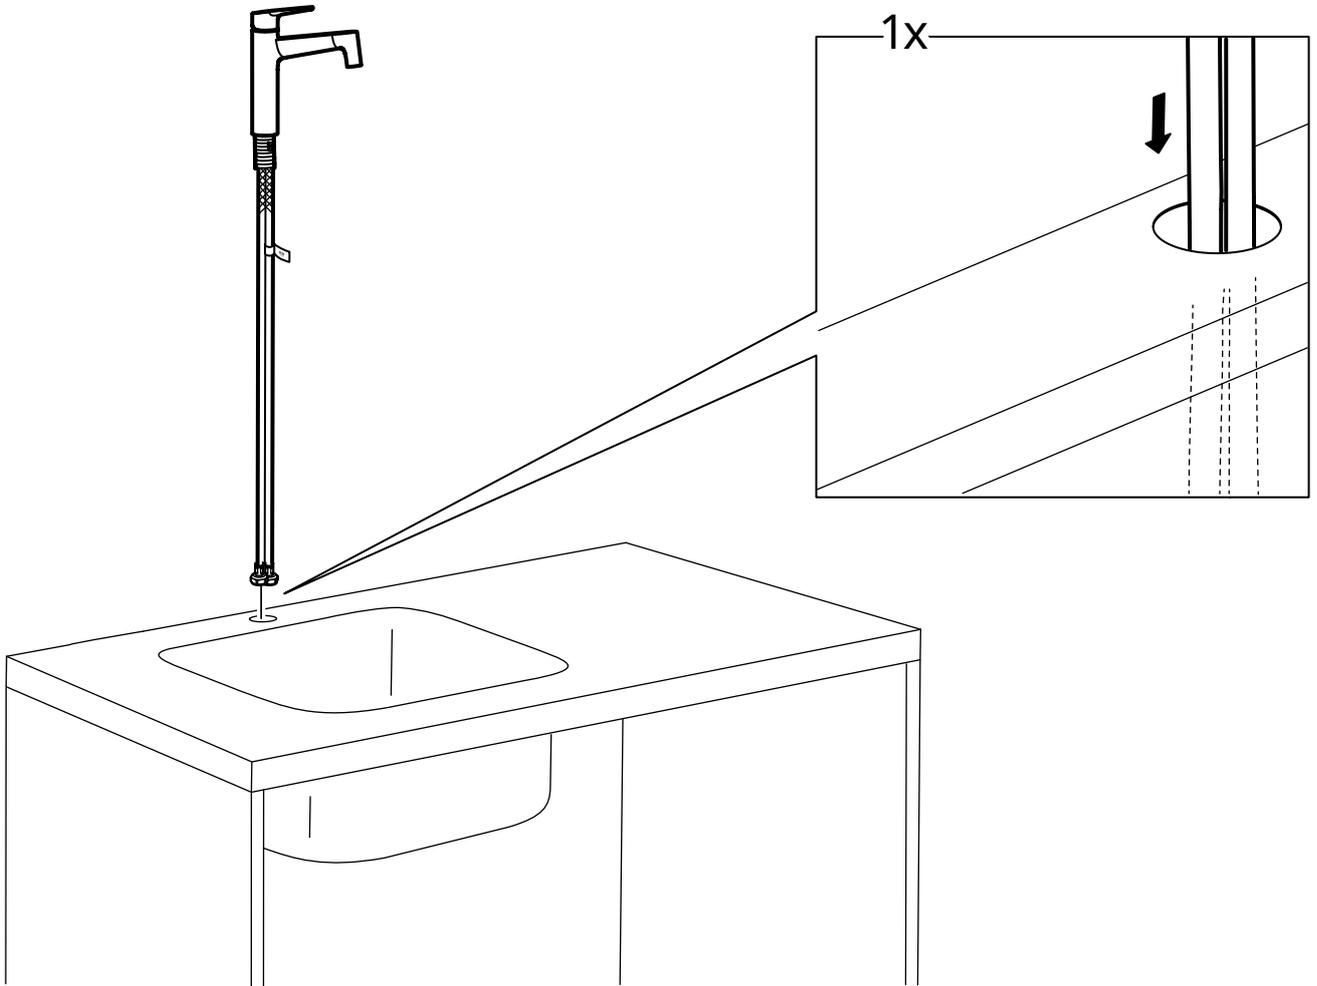


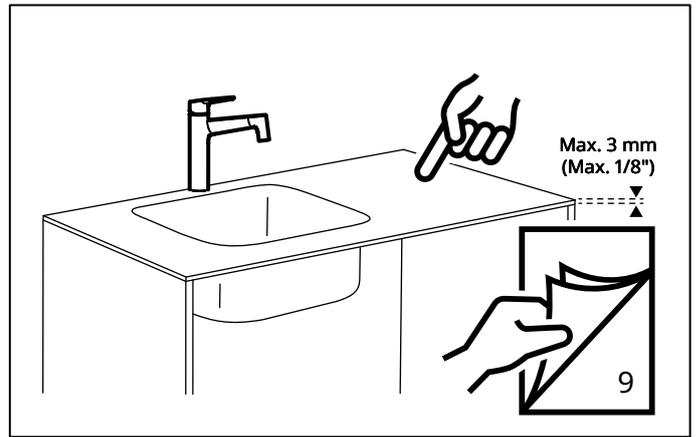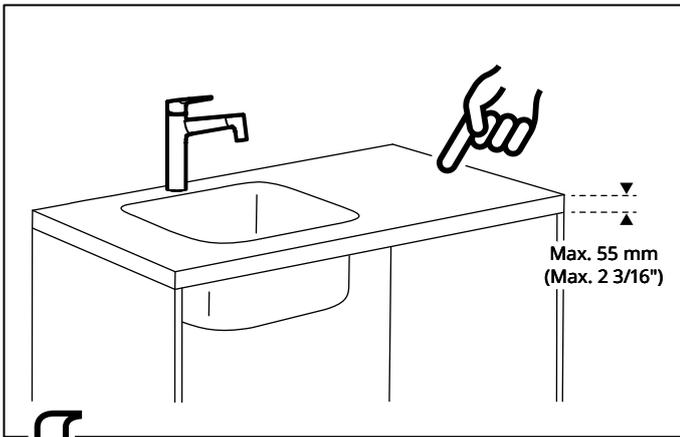


2

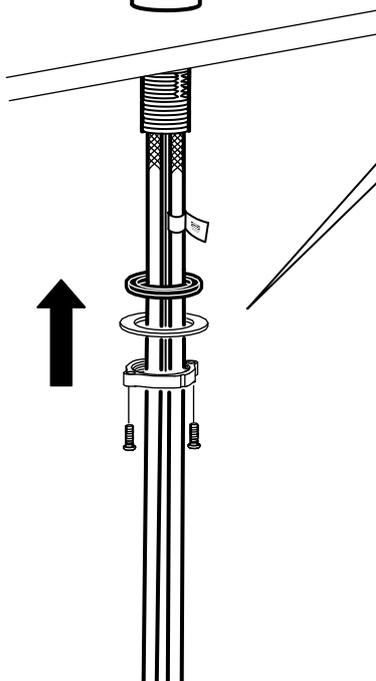
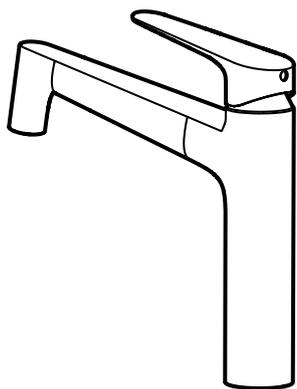



1x



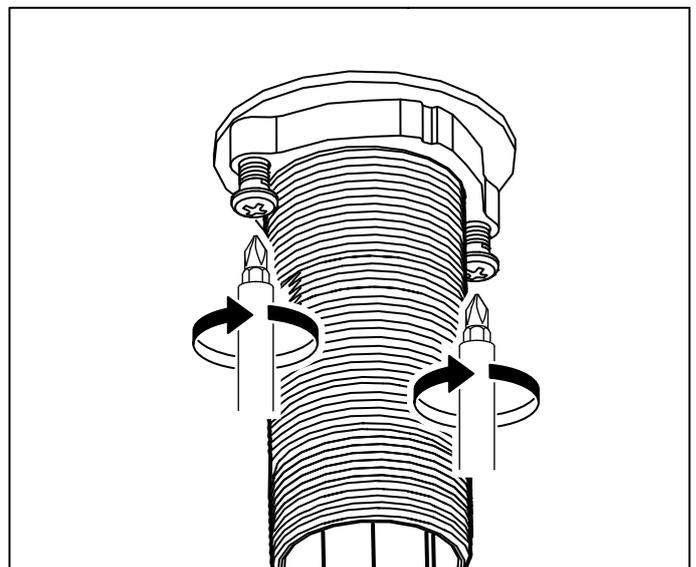
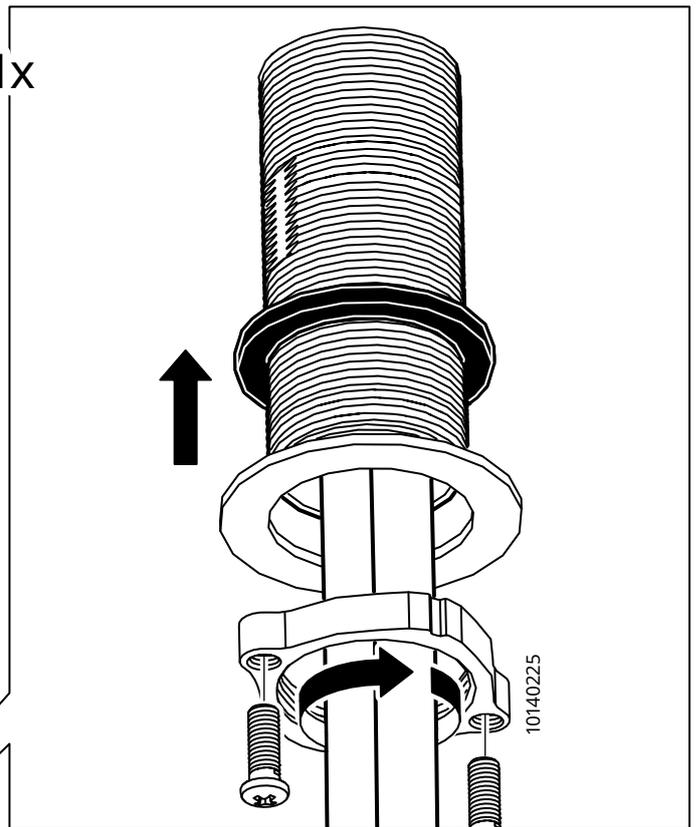


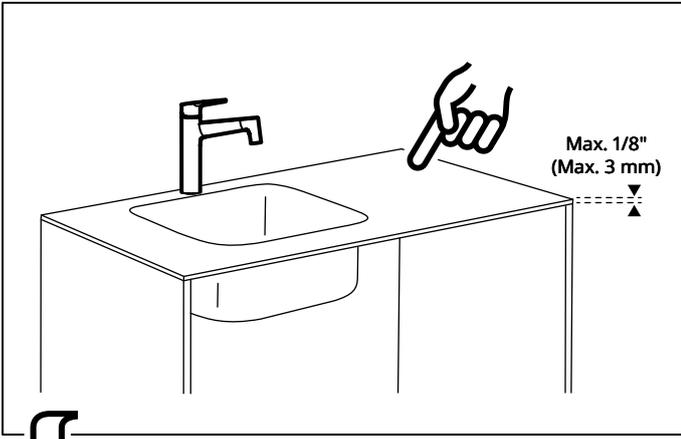


2

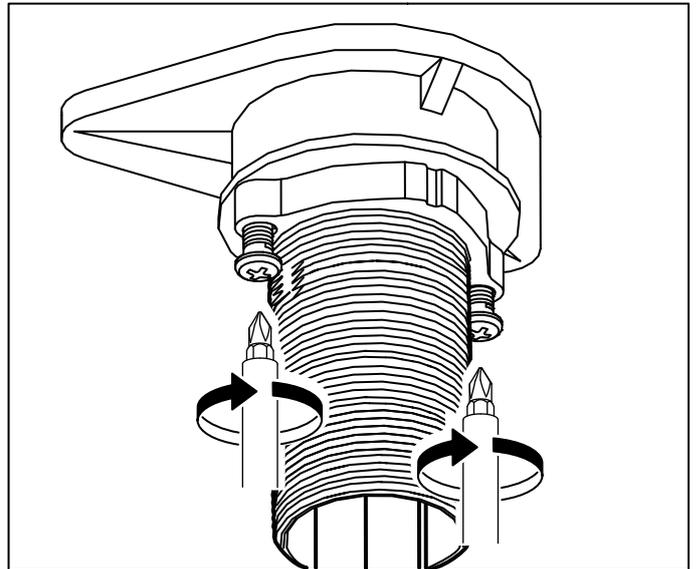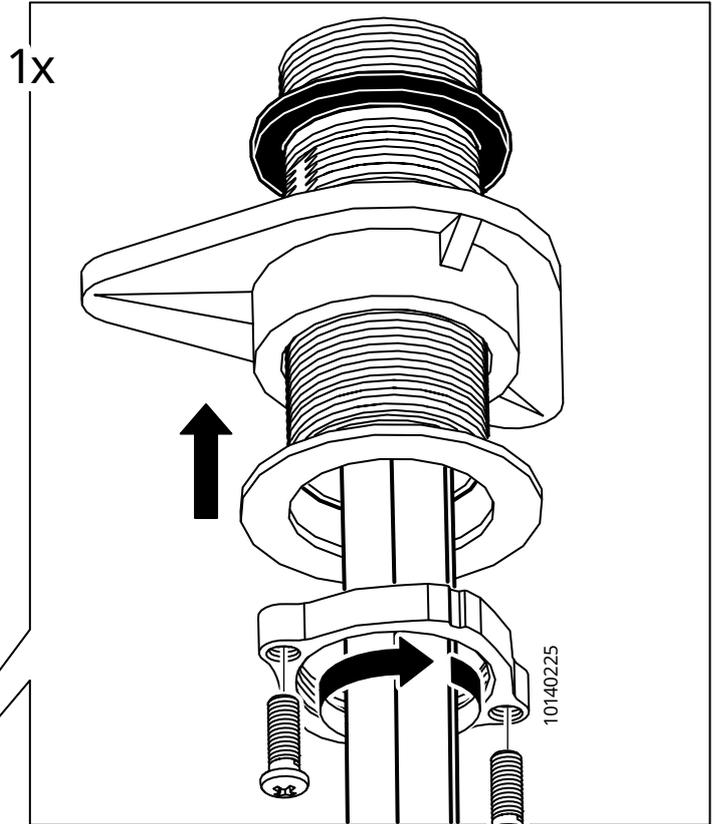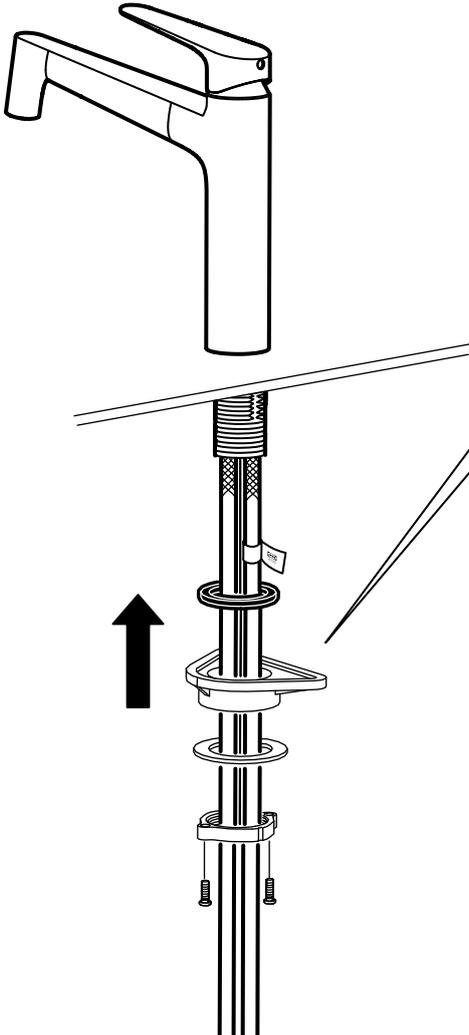

3

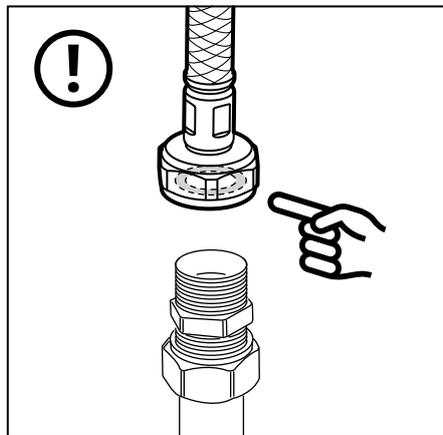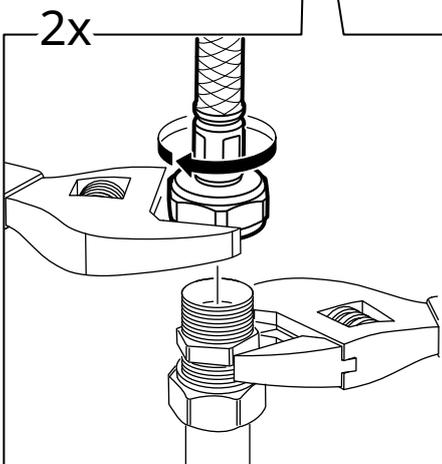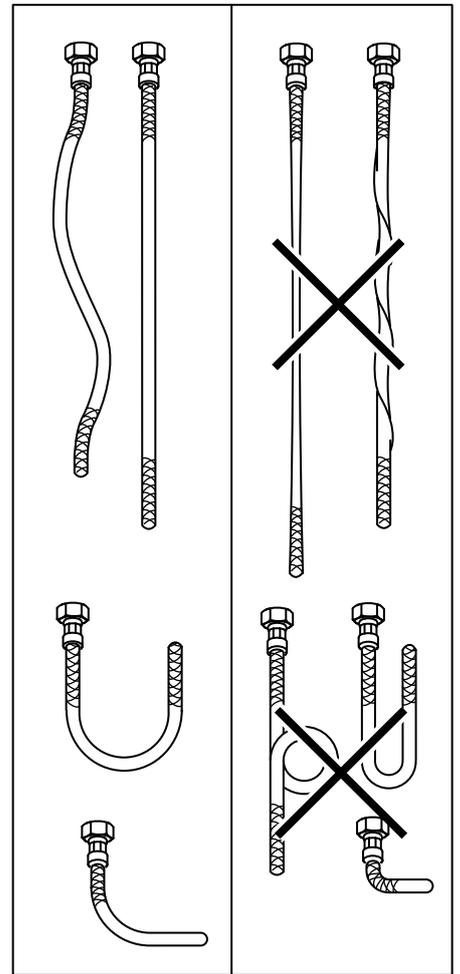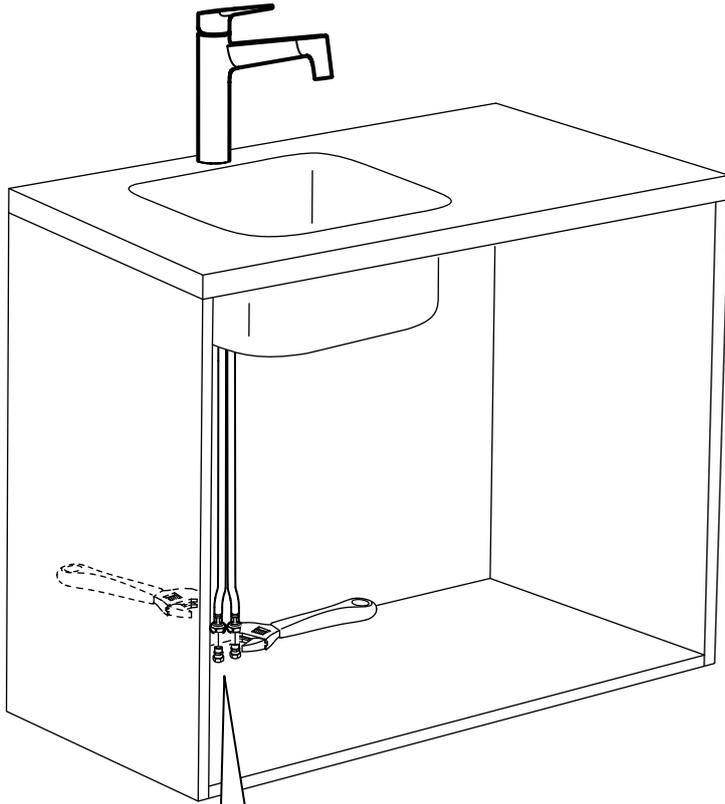

English
IMPORTANT! Do not tighten too hard: this can damage hoses/pipes and washers.

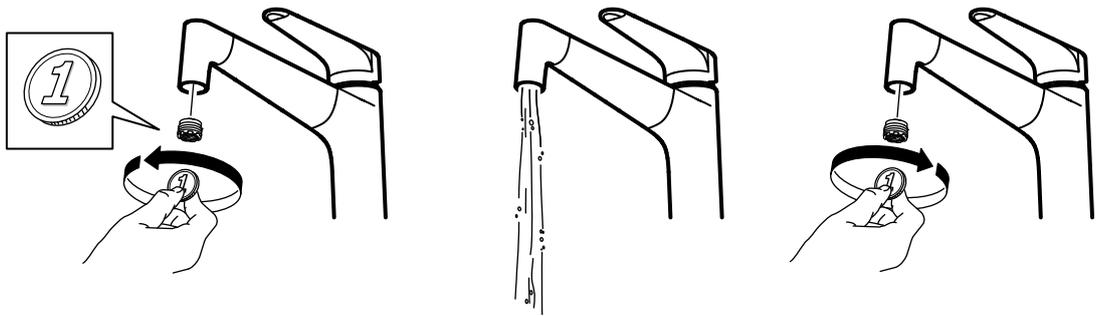

English

Before use: Unscrew the Aerator/Flow Guide and allow the water to run freely for a few minutes. Then screw the Aerator/Flow Guide back in place. Ensure that it is tight to prevent removal by hand.



English

Check at regular intervals to make sure that the installation is not leaking.

