


TAKSJÖN



Design and Quality
IKEA of Sweden

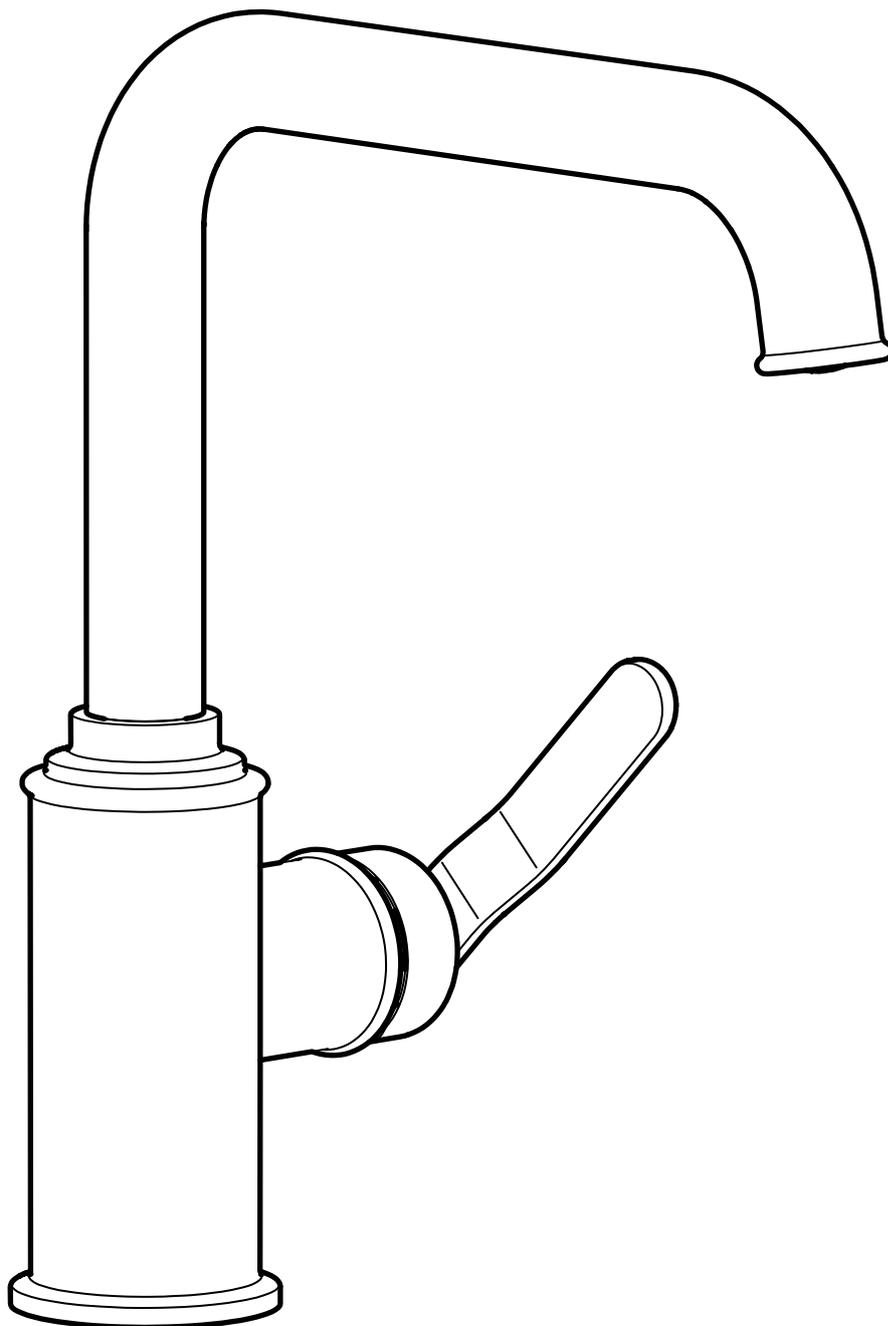




English



Installation must be performed in compliance with current local construction and plumbing regulations. If in doubt, contact a professional.









English





Switch off main shut-off valve before changing mixer tap.

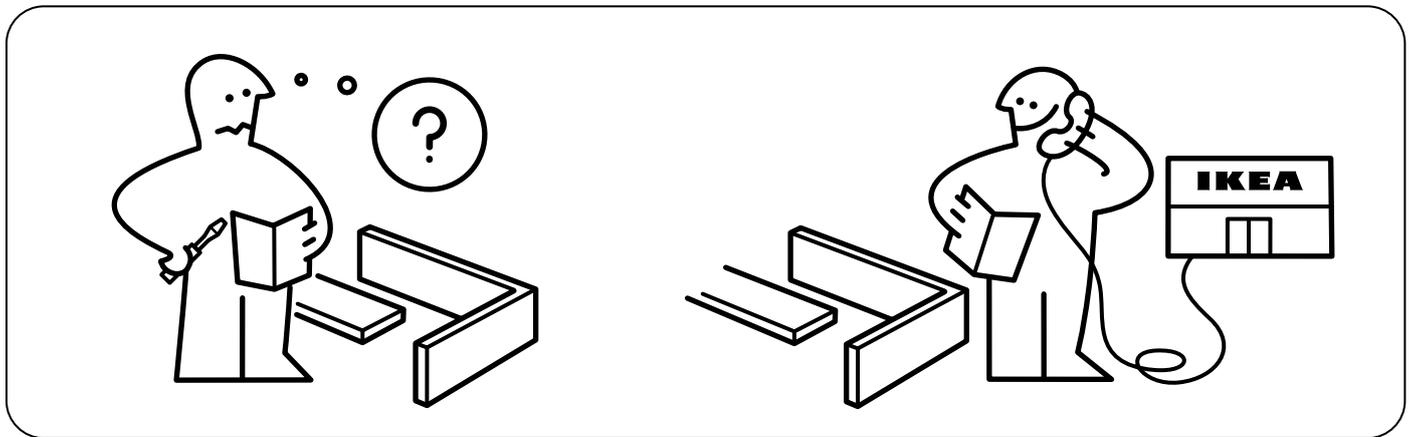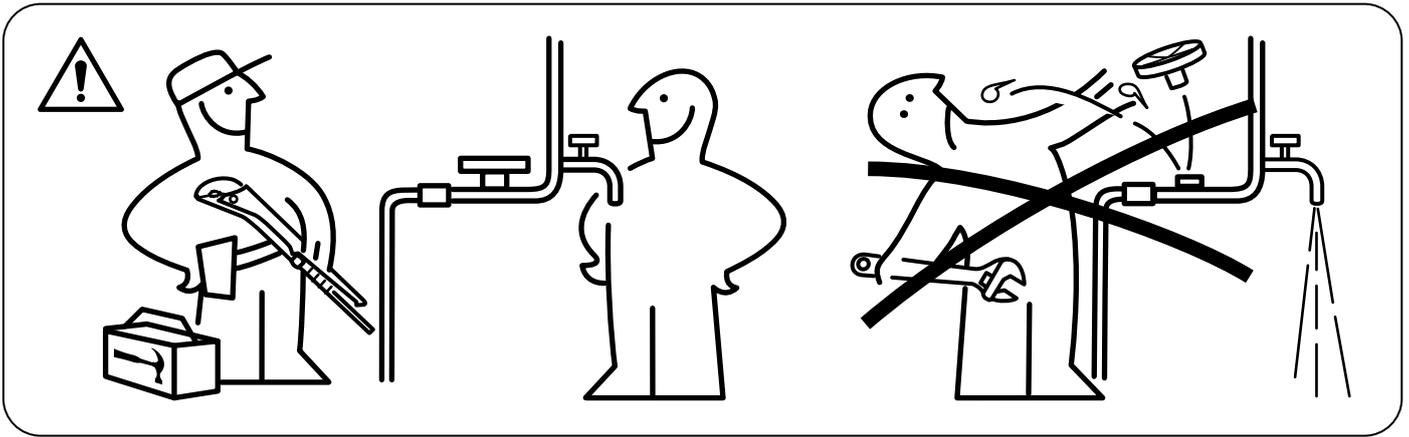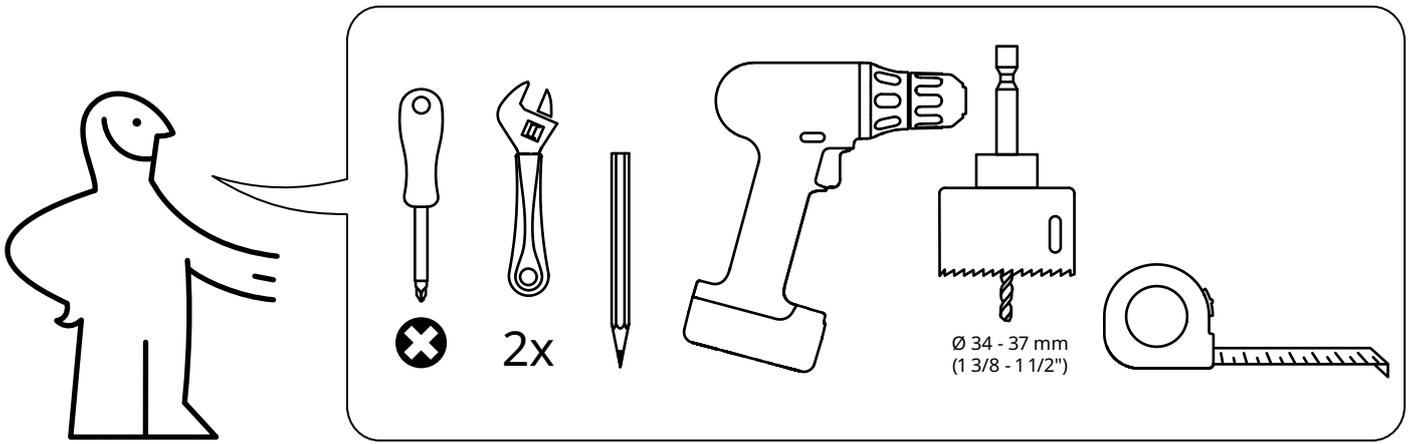

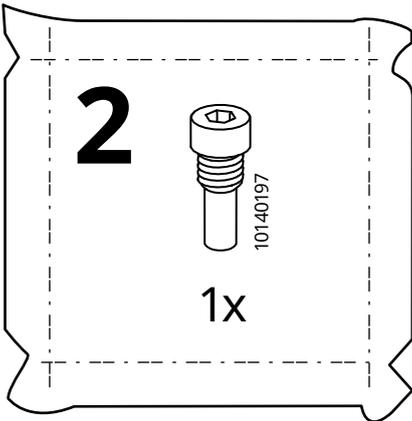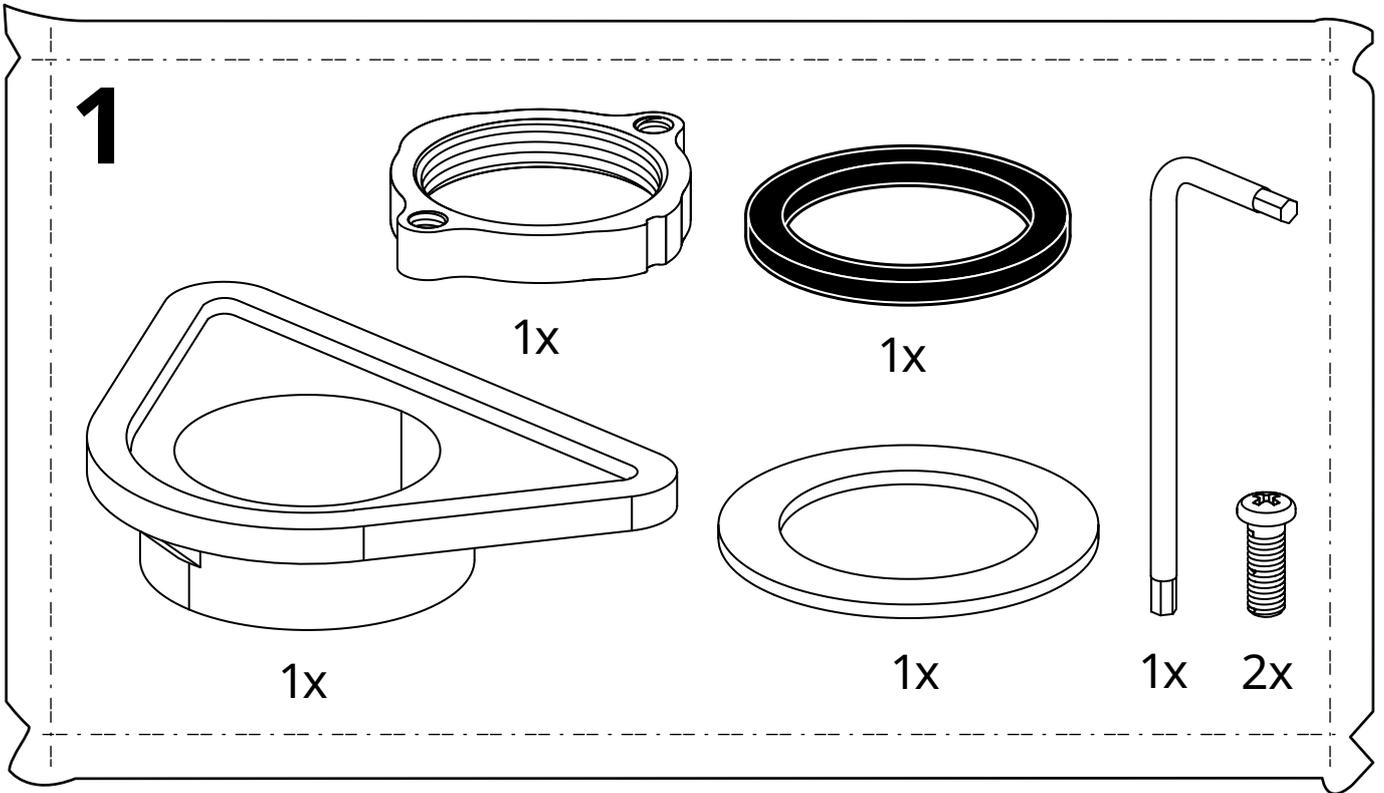


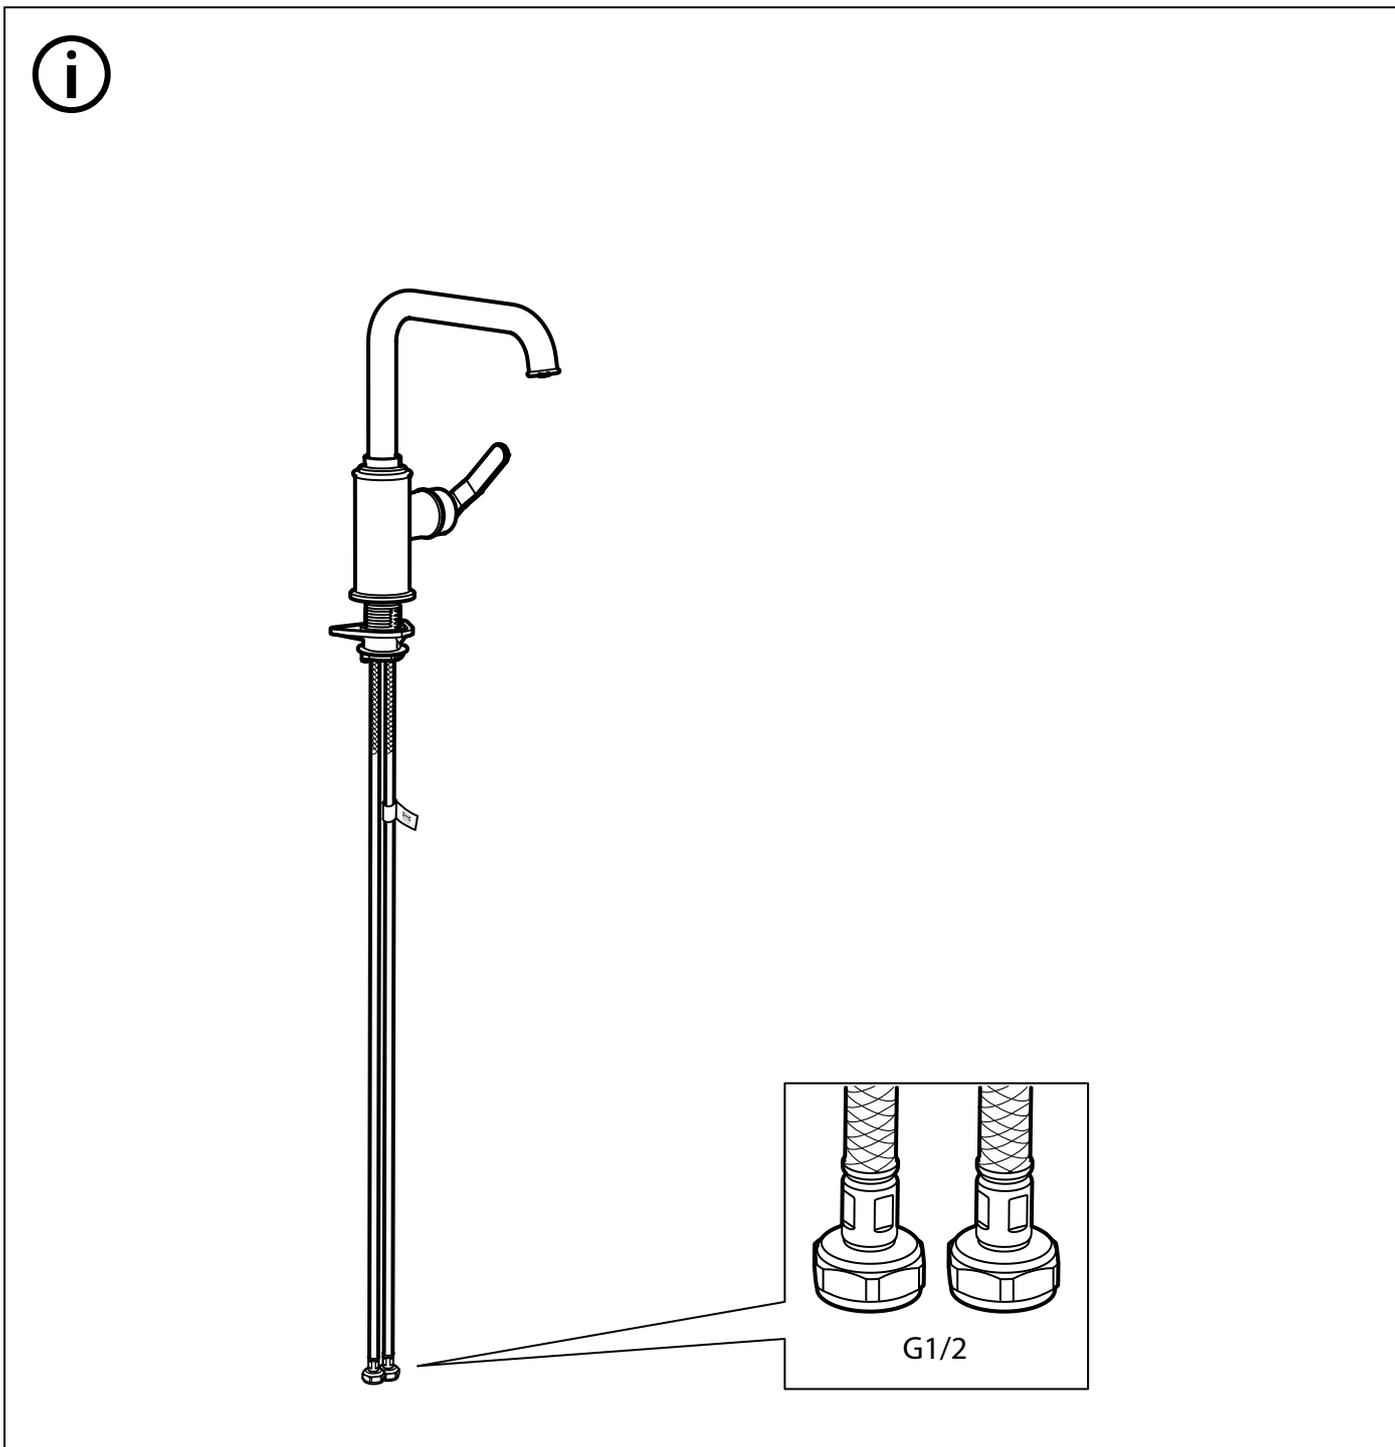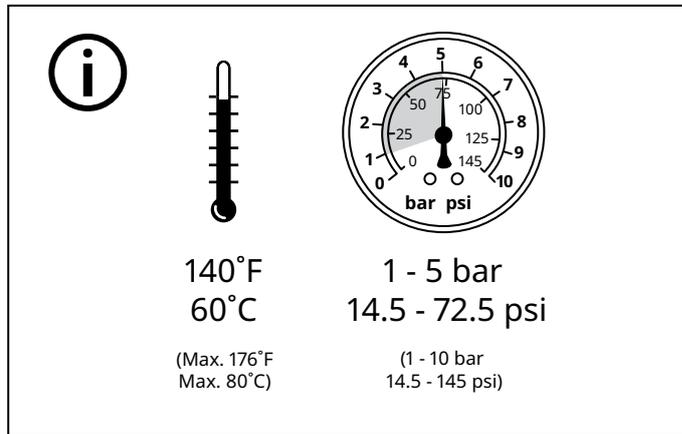
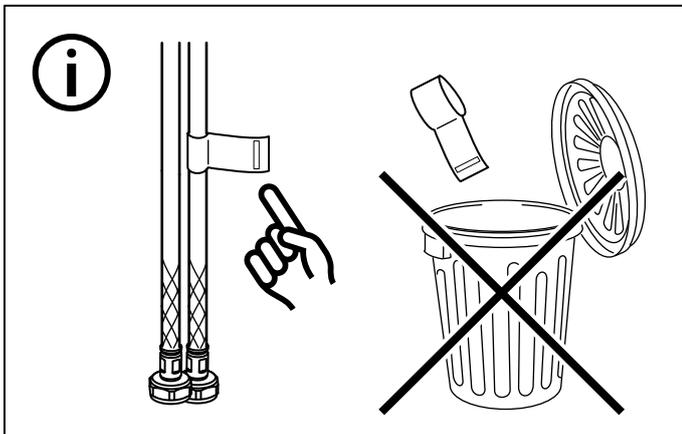


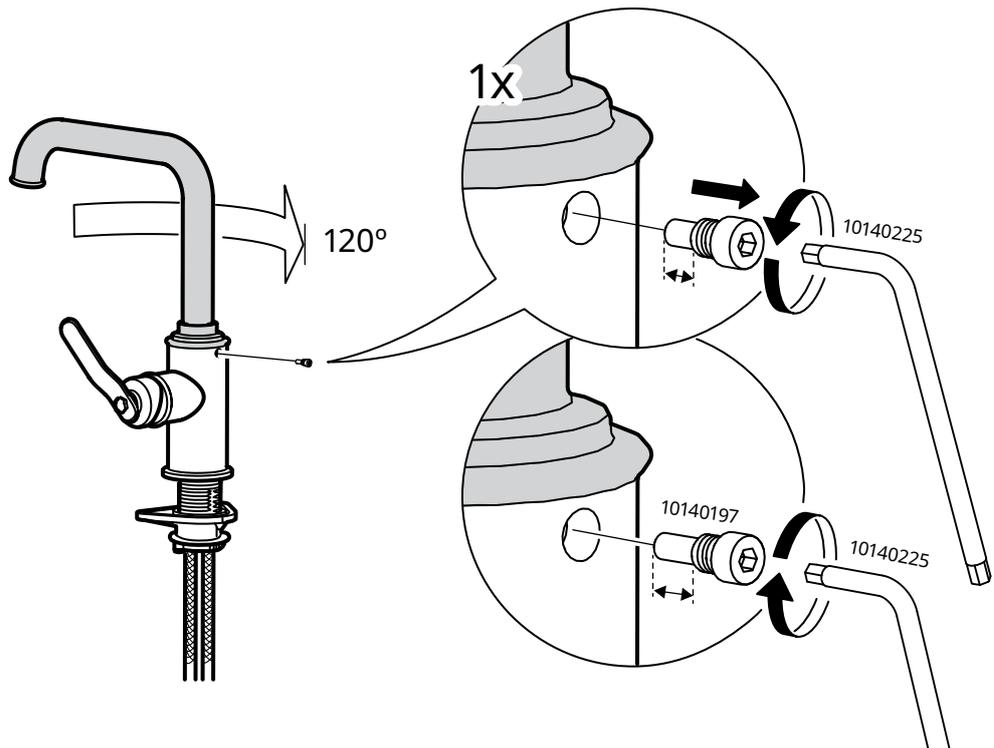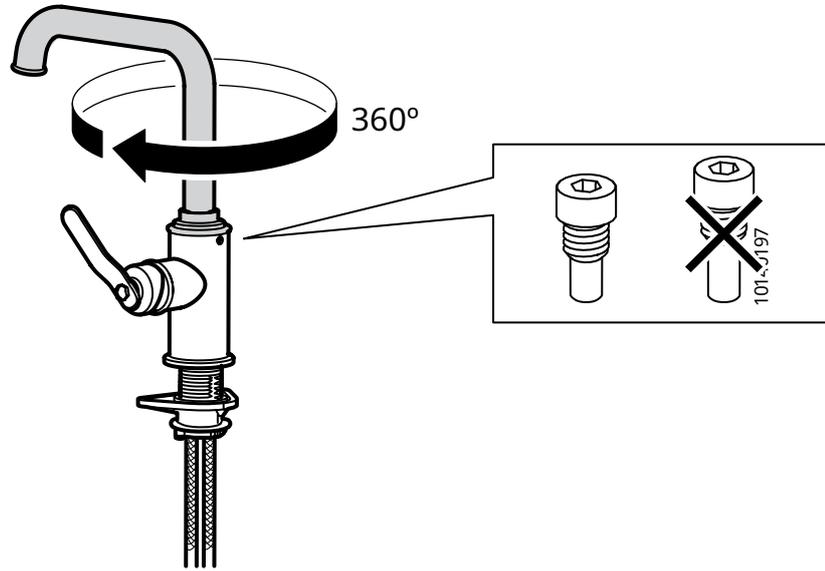

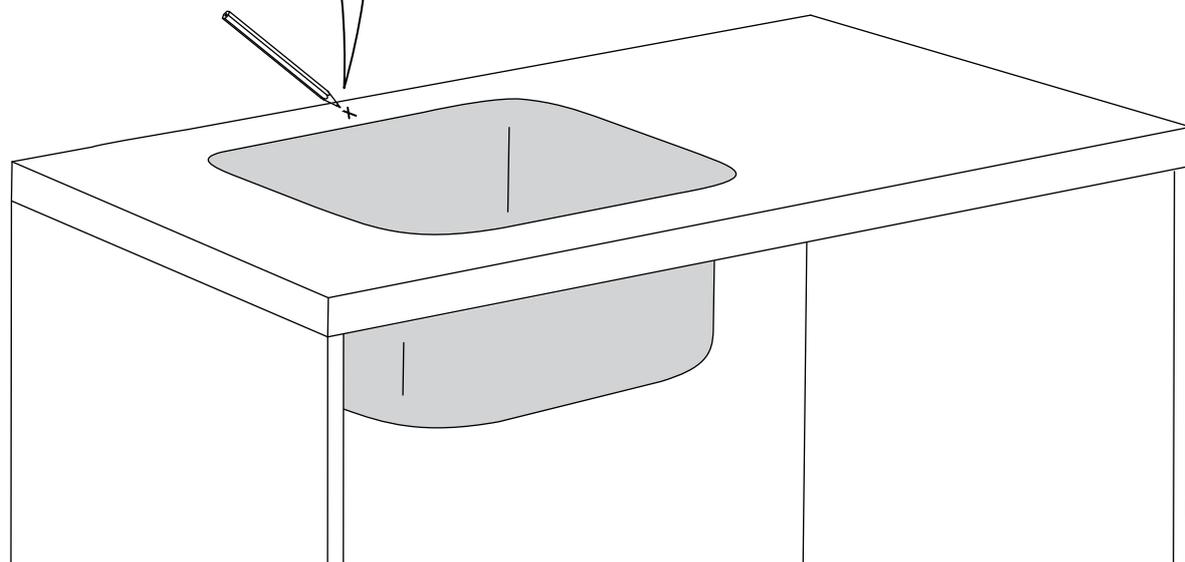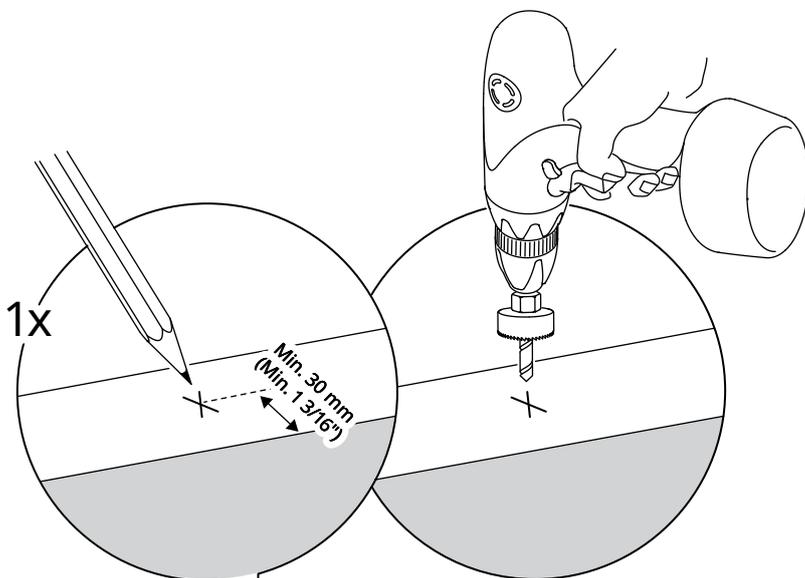
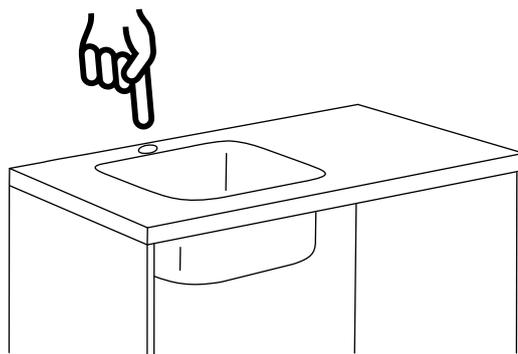
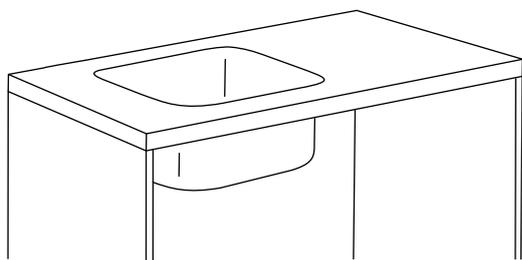



1

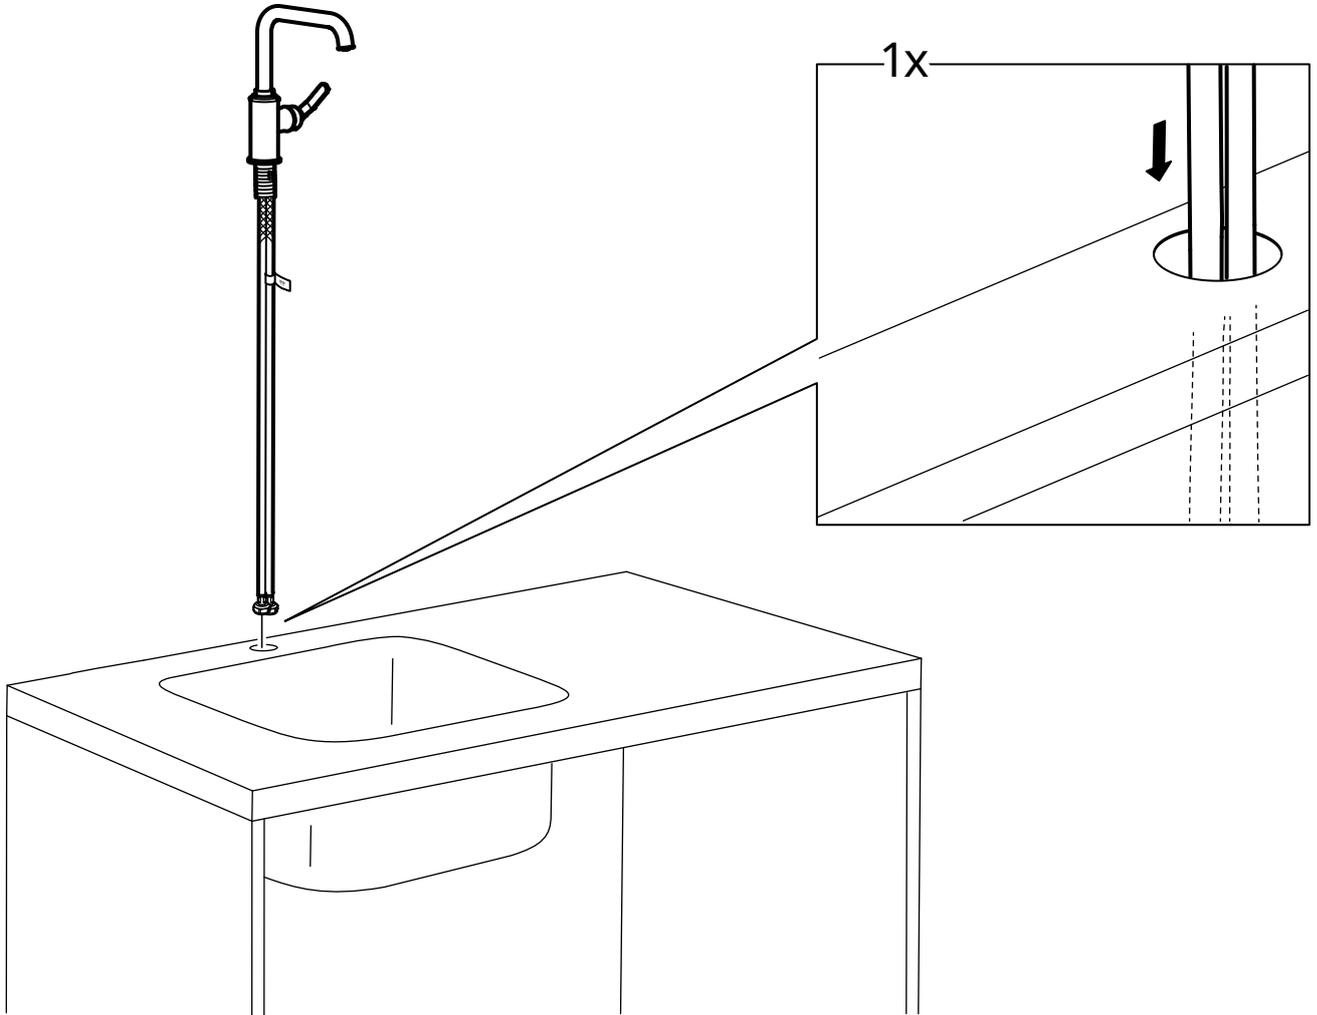


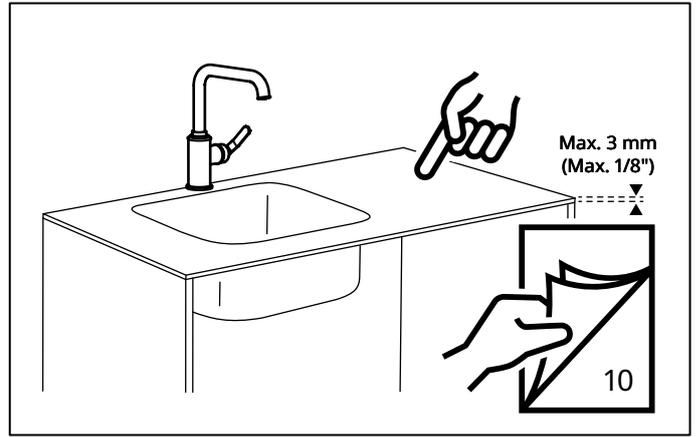
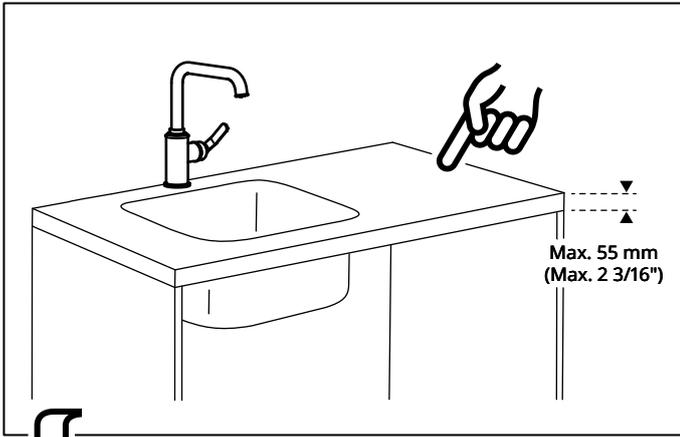


2


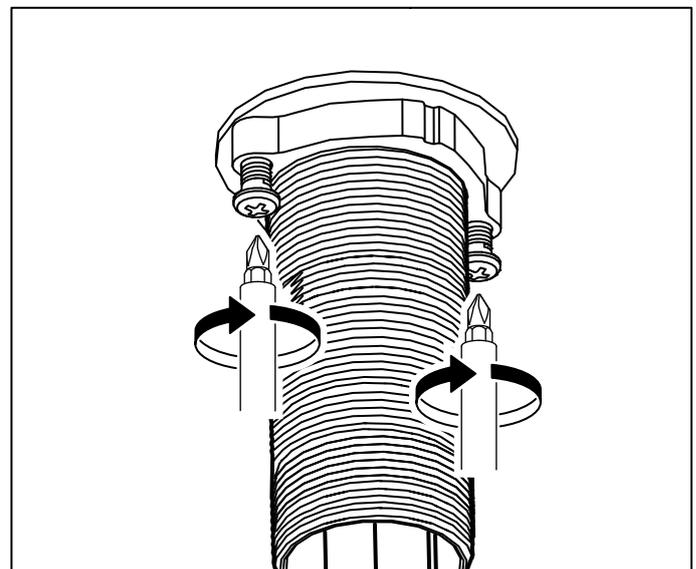
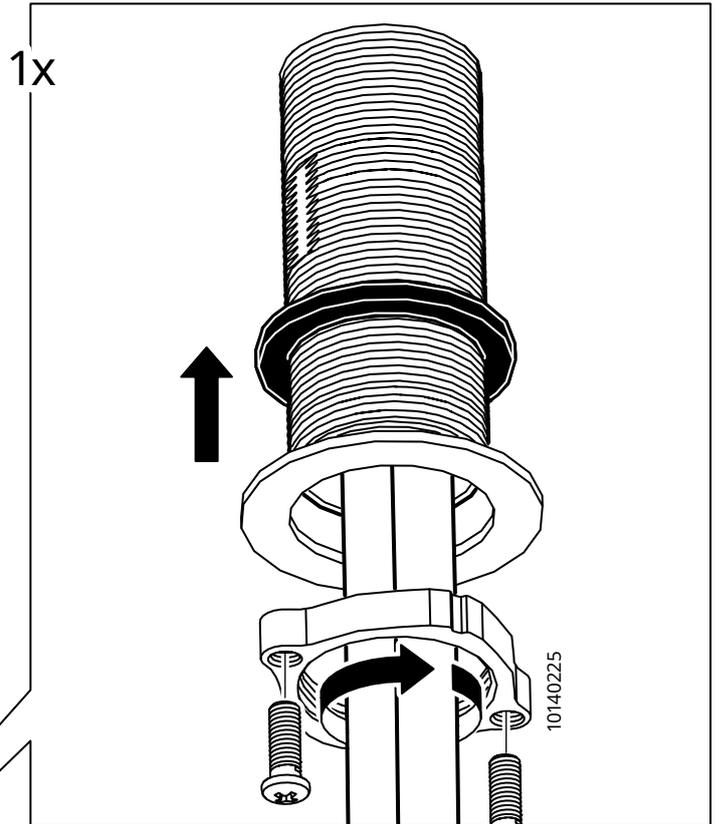
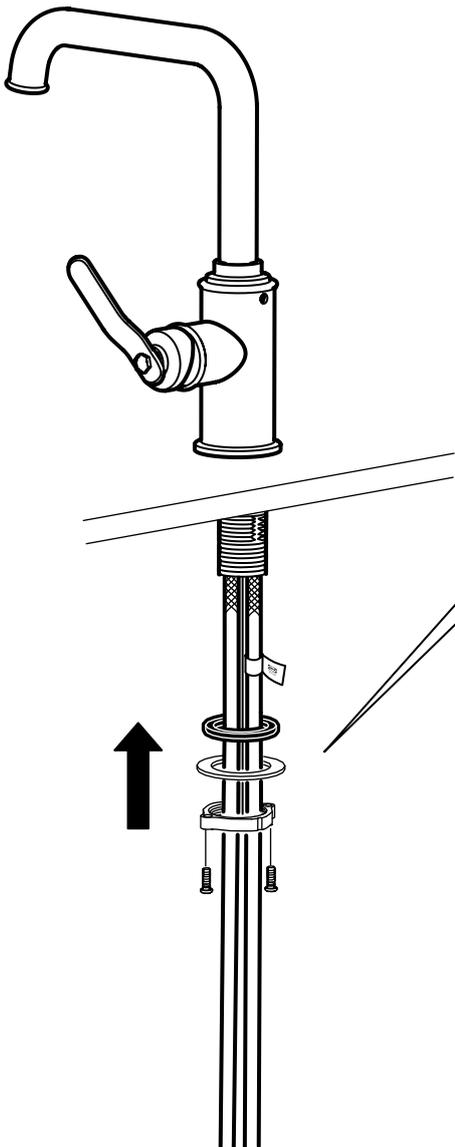


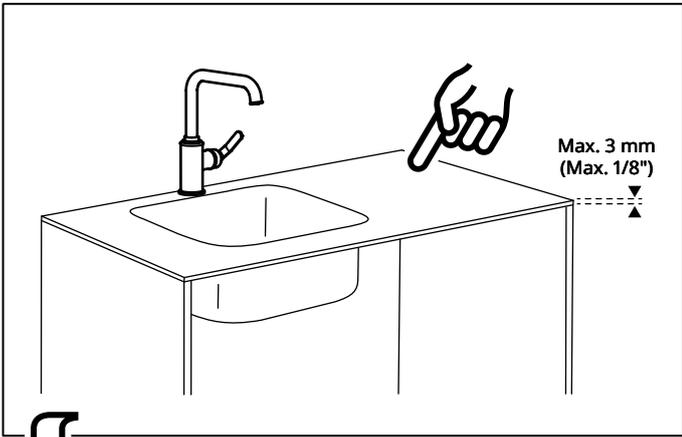

2

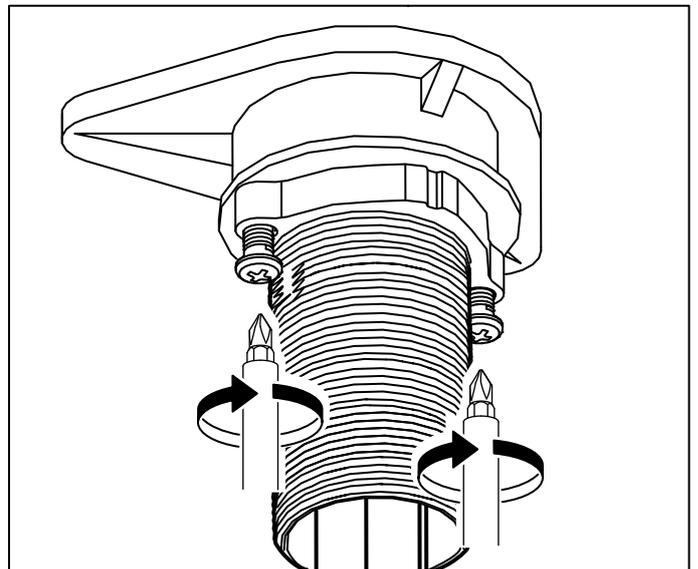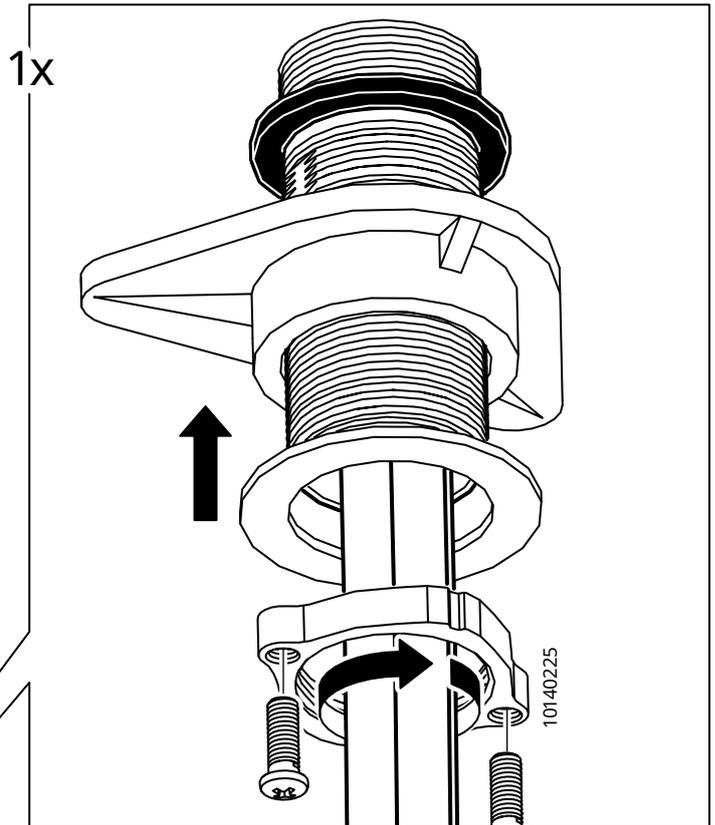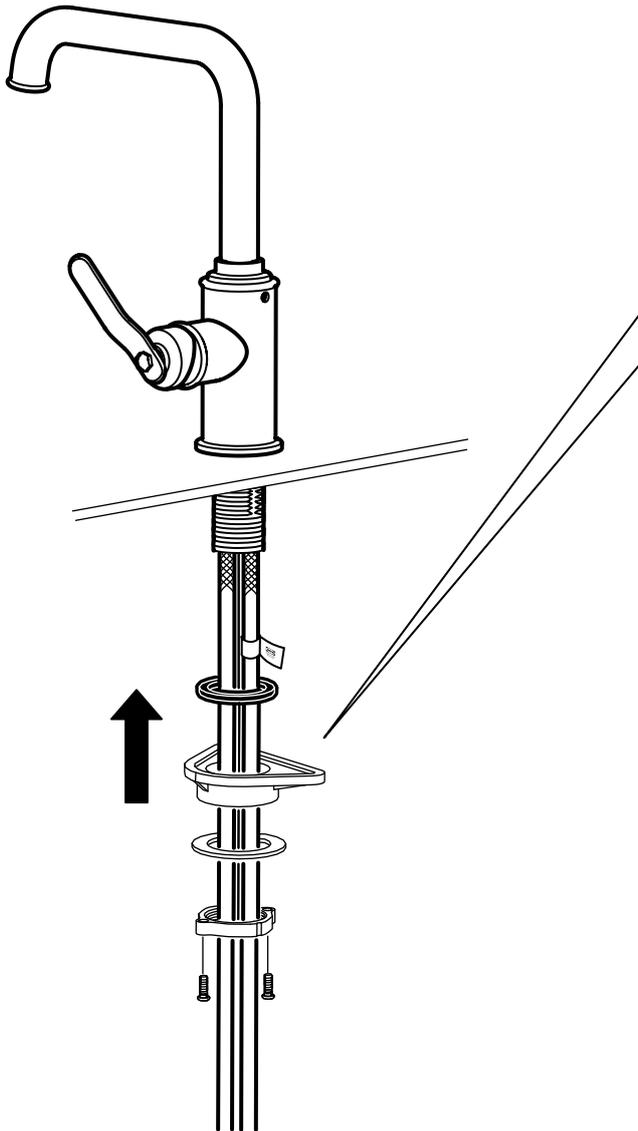

3

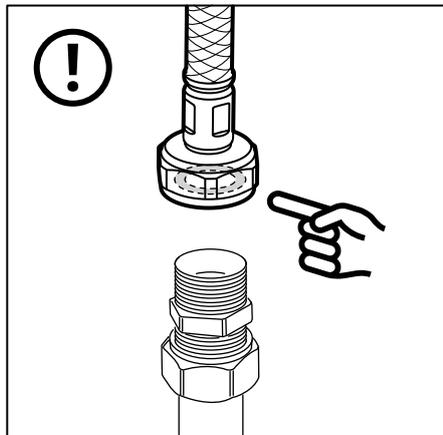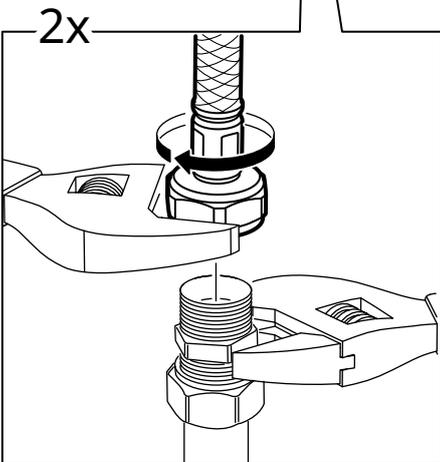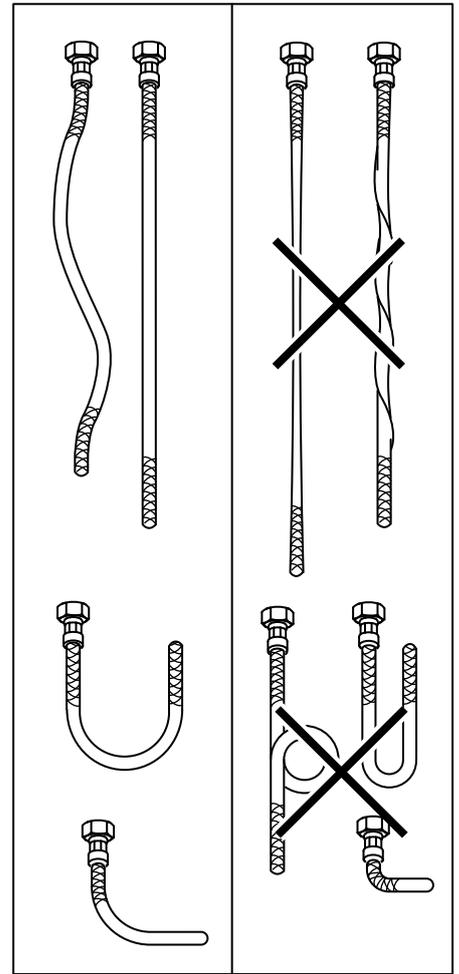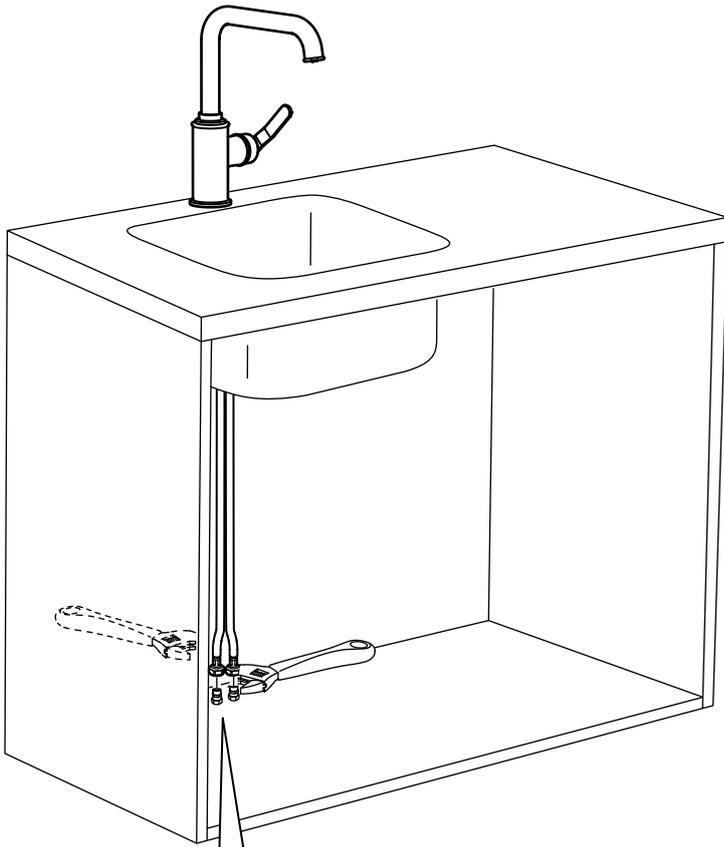

English
IMPORTANT! Do not tighten too hard: this can damage hoses/pipes and washers.



English

Before use: Unscrew the Aerator/Flow Guide and allow the water to run freely for a few minutes. Then screw the Aerator/Flow Guide back in place. Ensure that it is tight to prevent removal by hand.



English

Check at regular intervals to make sure that the installation is not leaking.

