


TAKSJÖN



Design and Quality
IKEA of Sweden

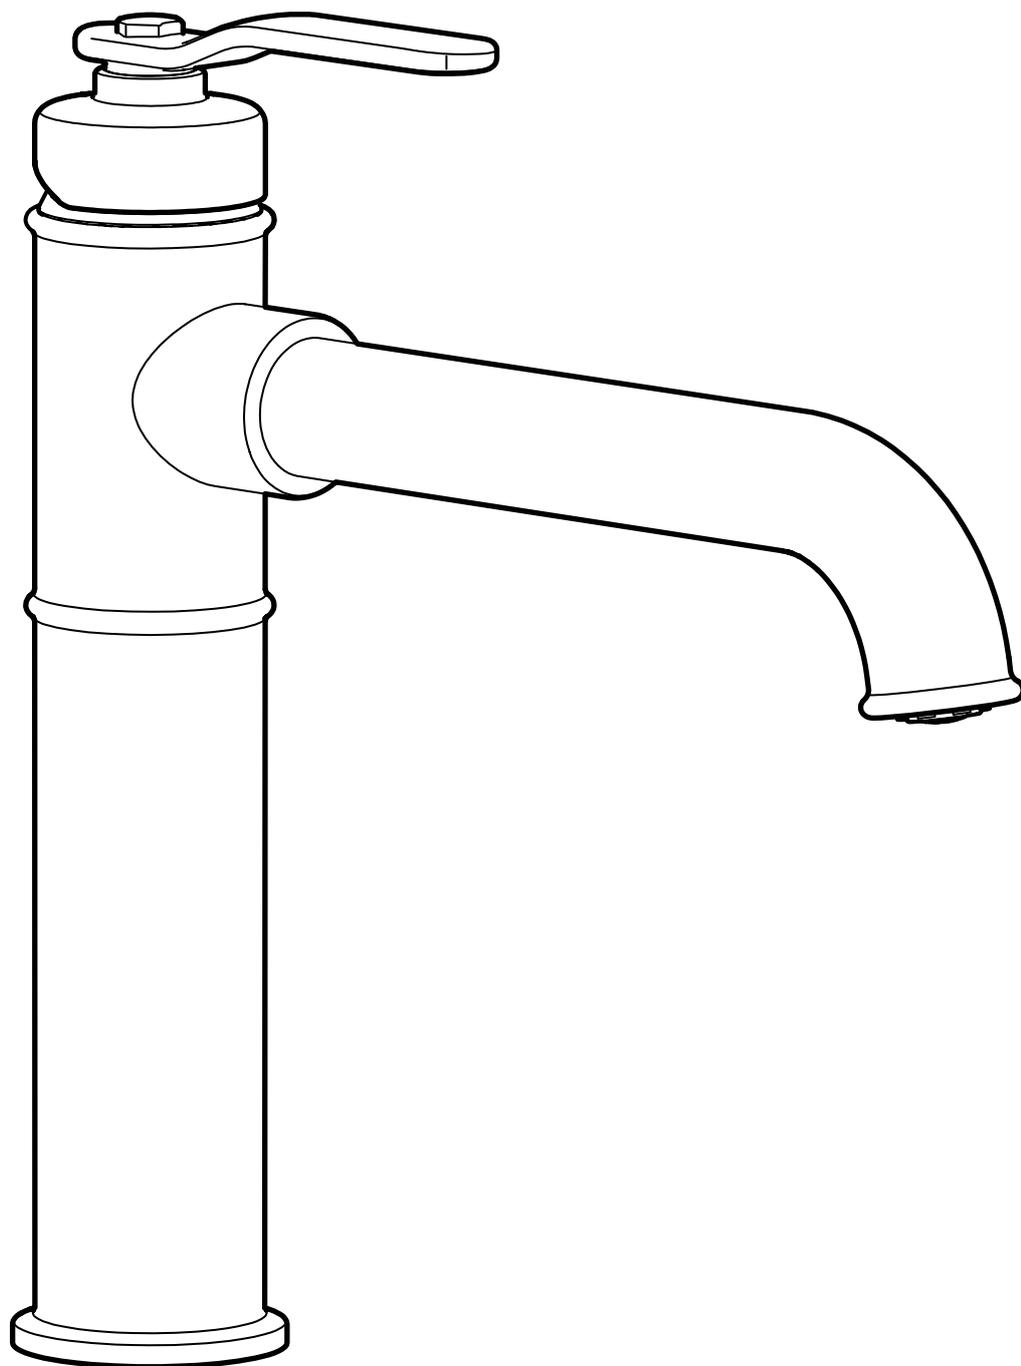




English

Installation must be performed in compliance with current local construction and plumbing regulations. If in doubt, contact a professional.




English


Switch off main shut-off valve before changing mixer tap.

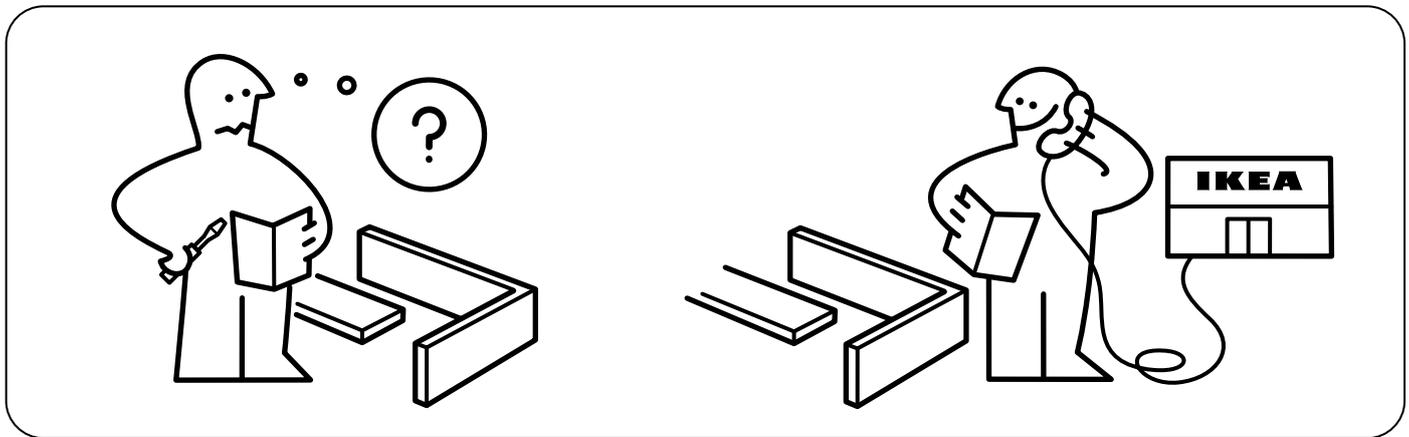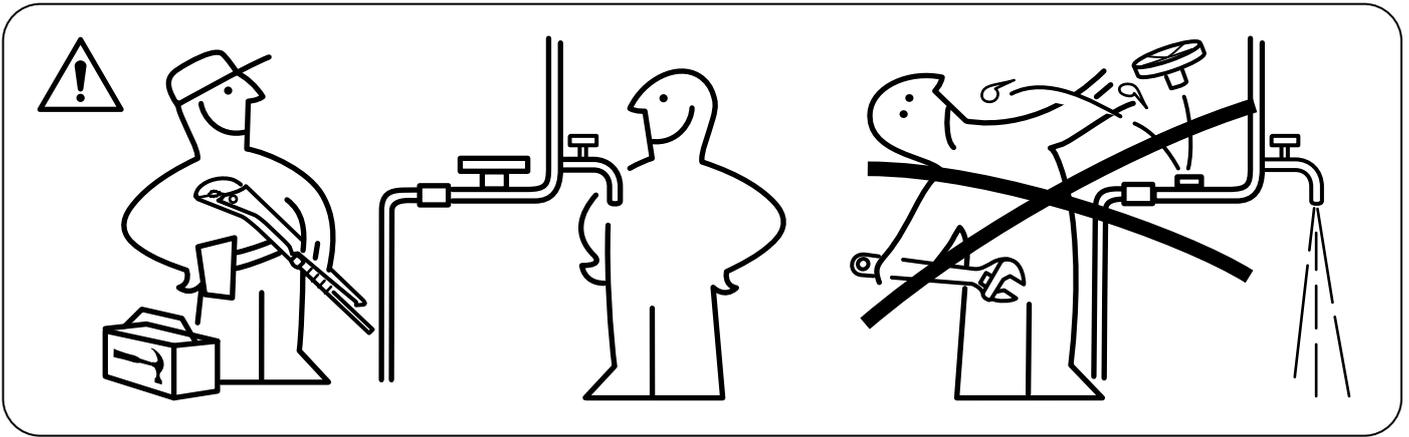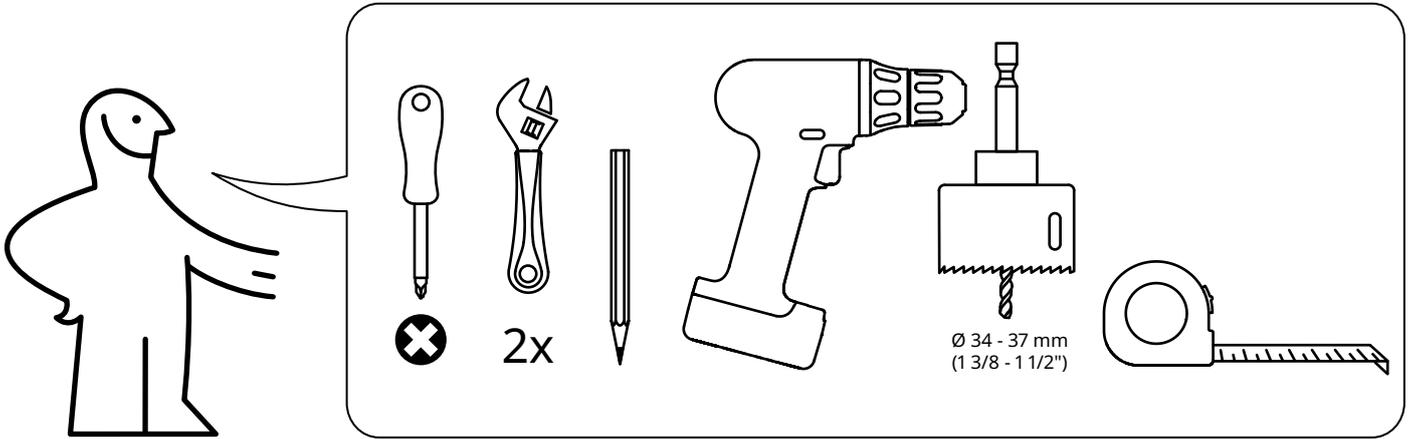


1

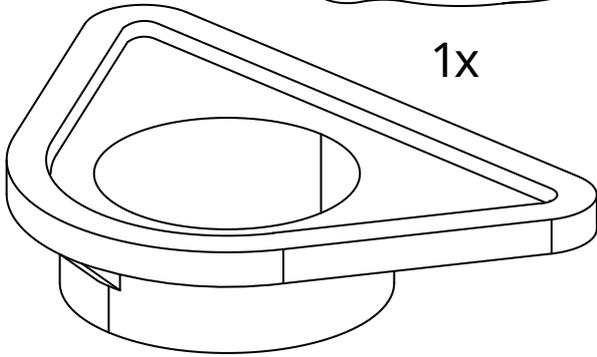


1x




1x




1x

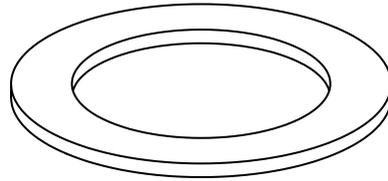

1x

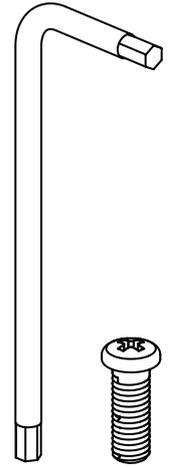


1x







2x

10140225

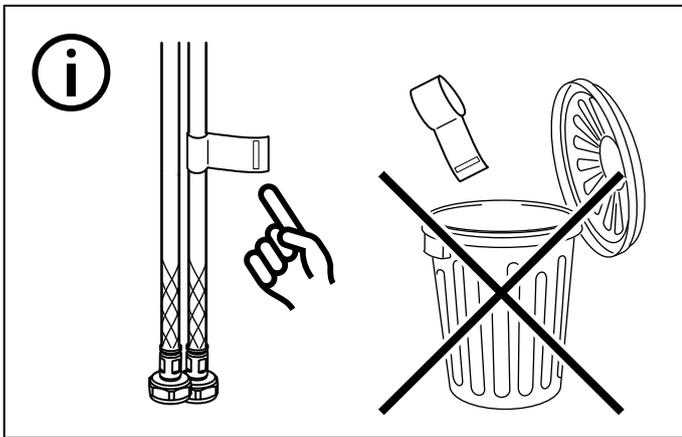




This panel contains an information icon (a lowercase 'i' in a circle) in the top left corner. To its right are a thermometer and a pressure gauge. Below the thermometer are the temperature specifications: 60°C, 140°F, and (Max. 80°C, Max. 176°F). Below the pressure gauge are the pressure specifications: 1 - 5 bar, 14.5 - 72.5 psi, and (1 - 10 bar, 14.5 - 145 psi).

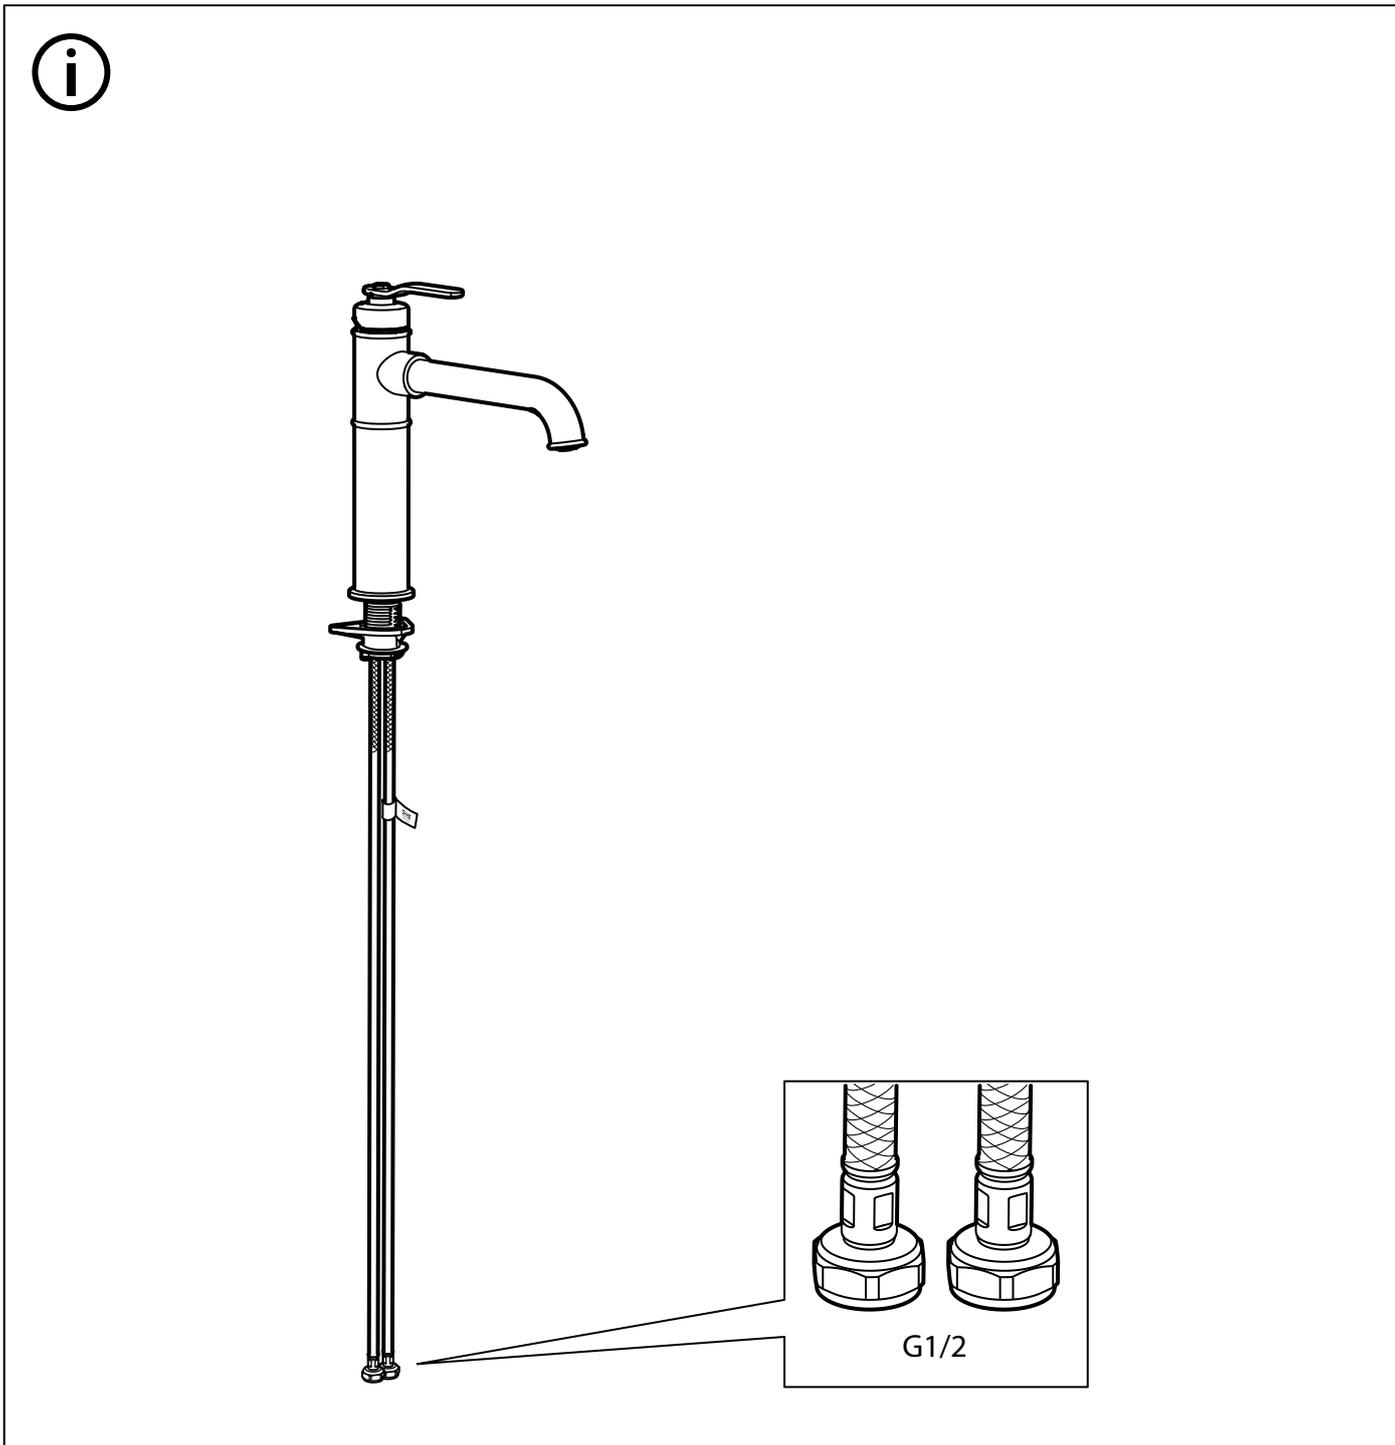

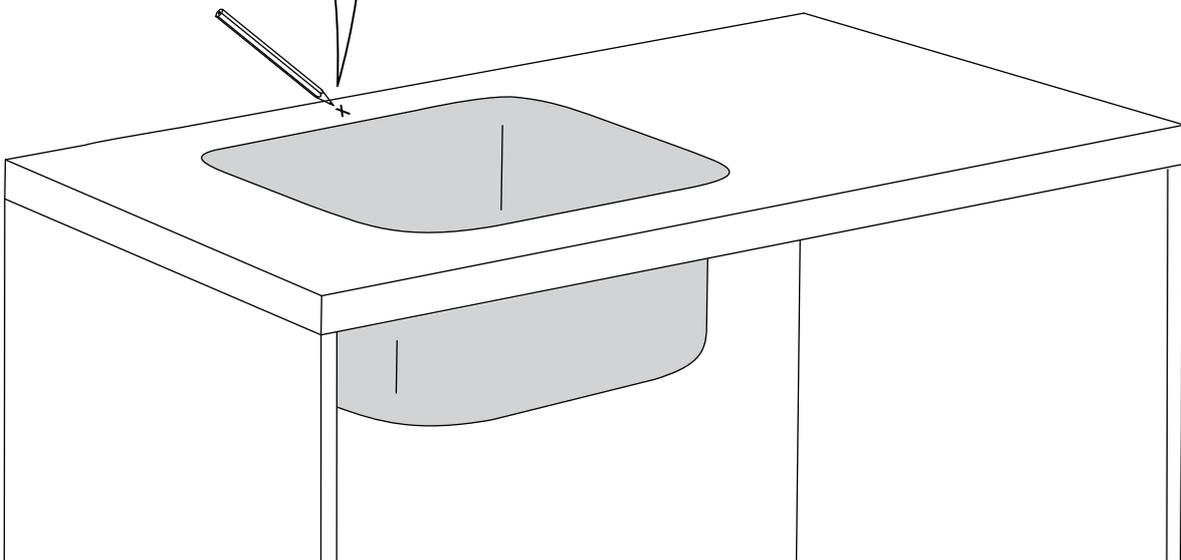
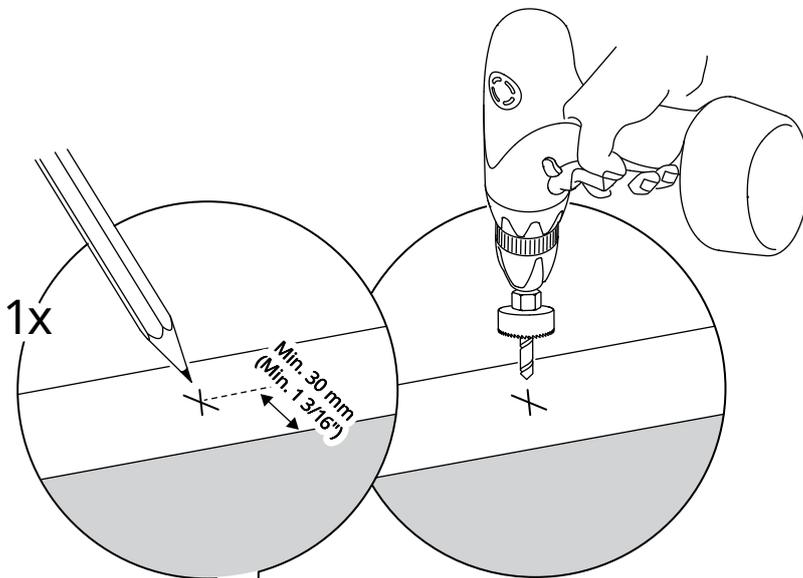
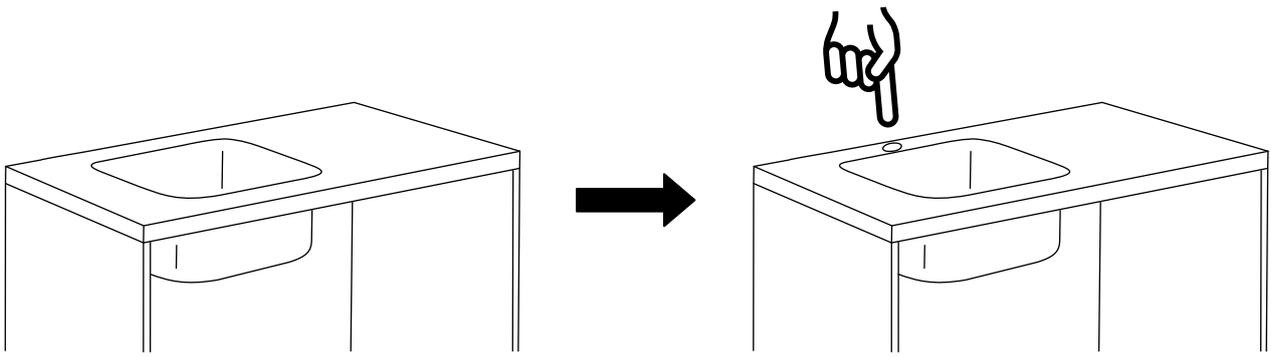



1

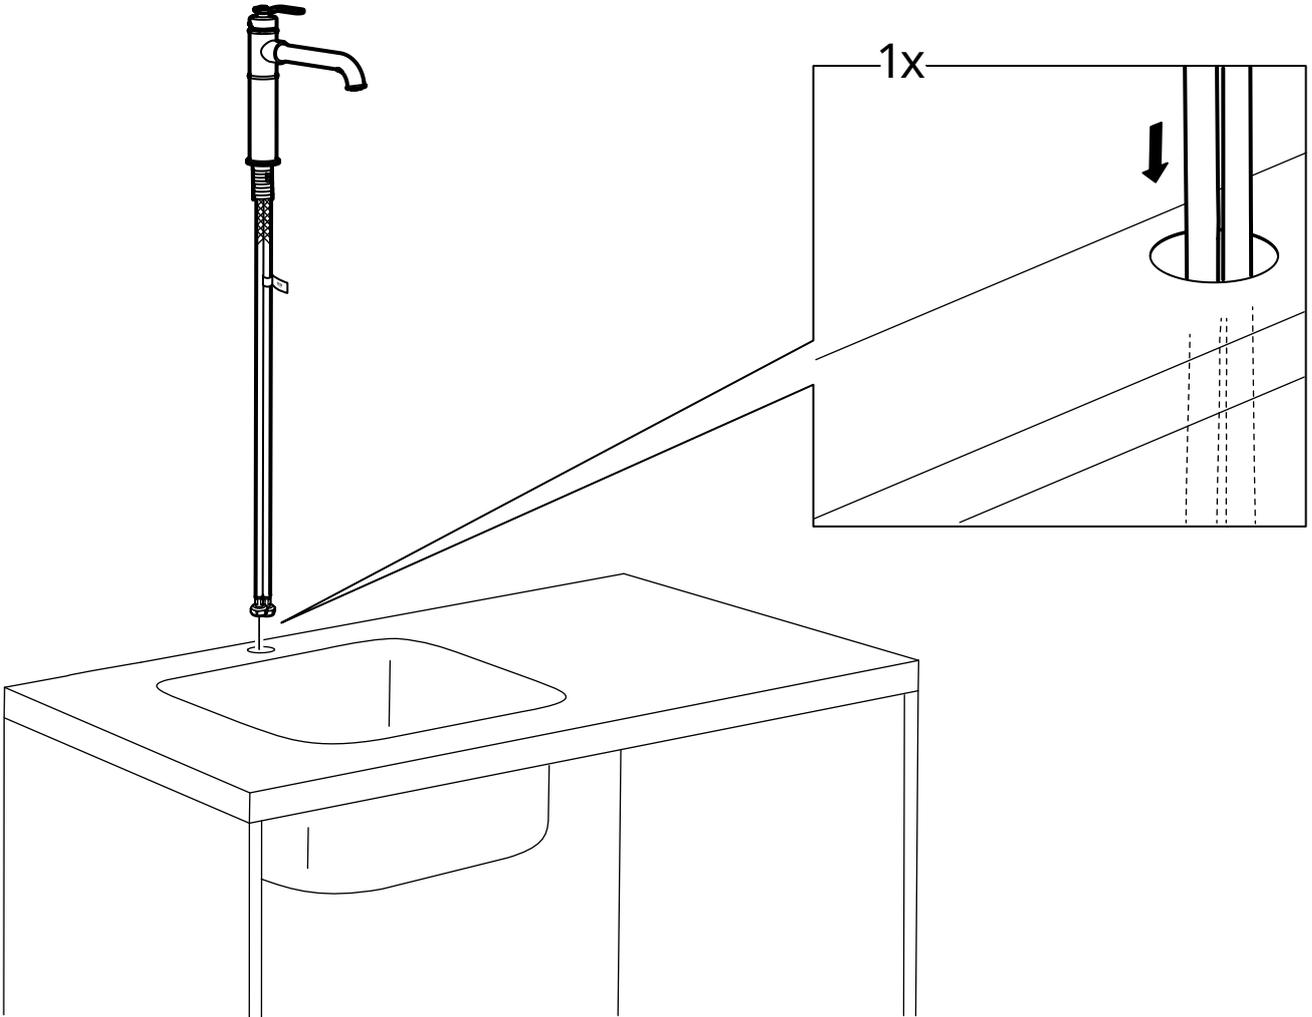

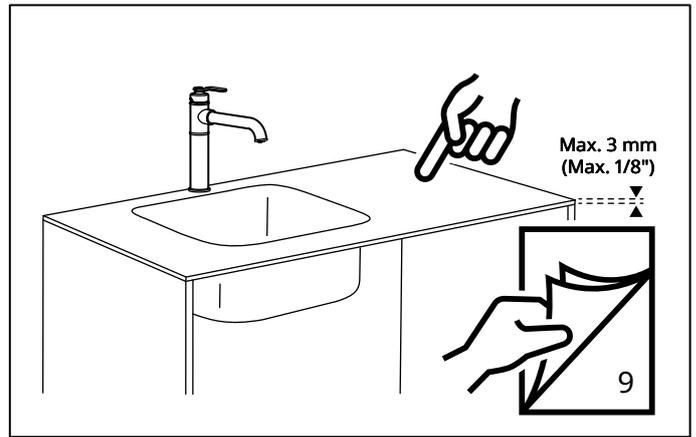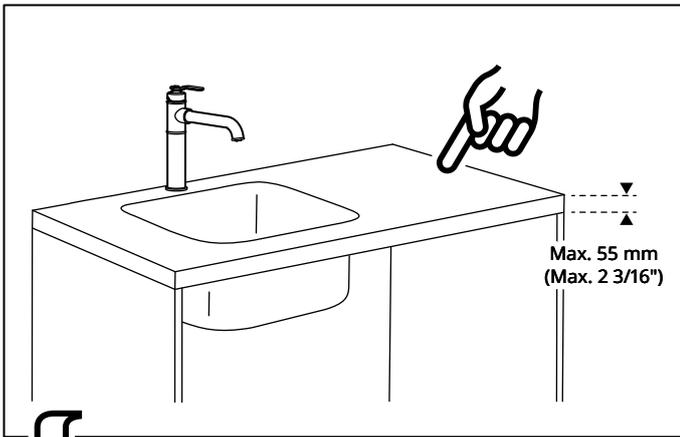

2

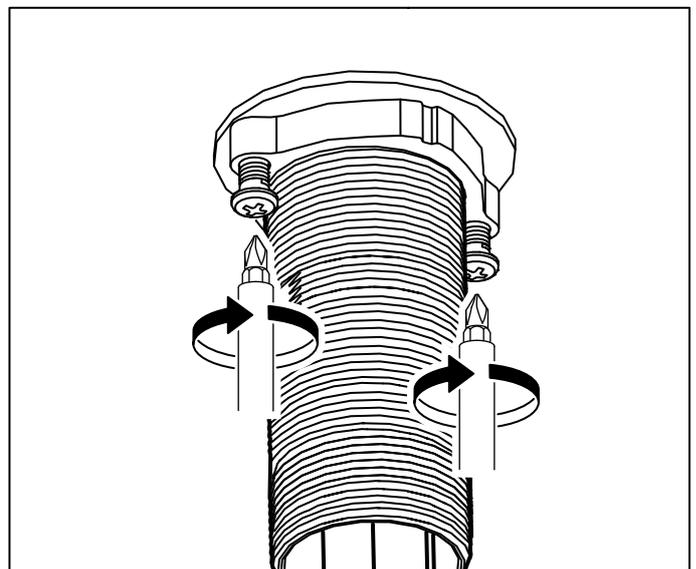
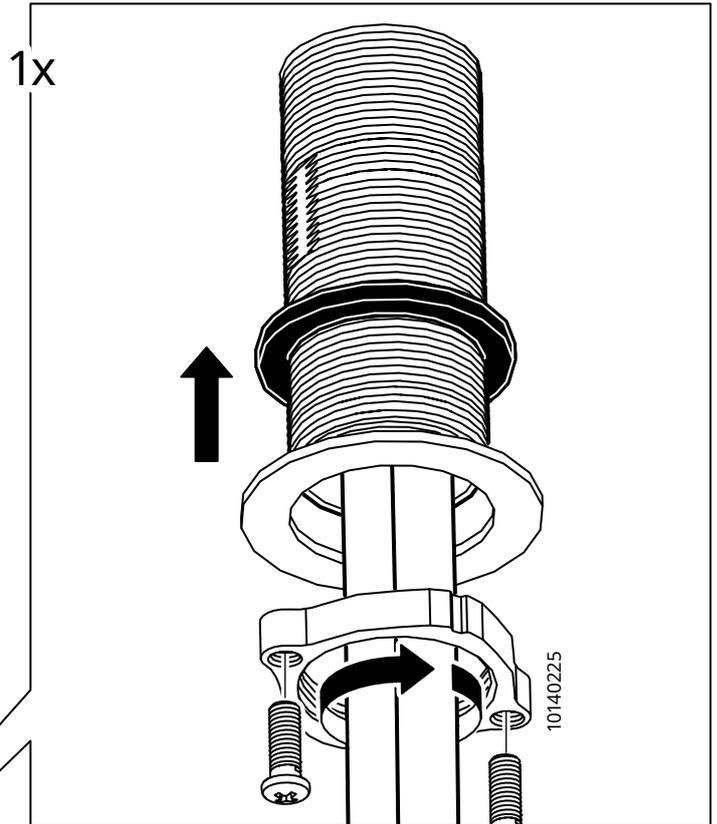
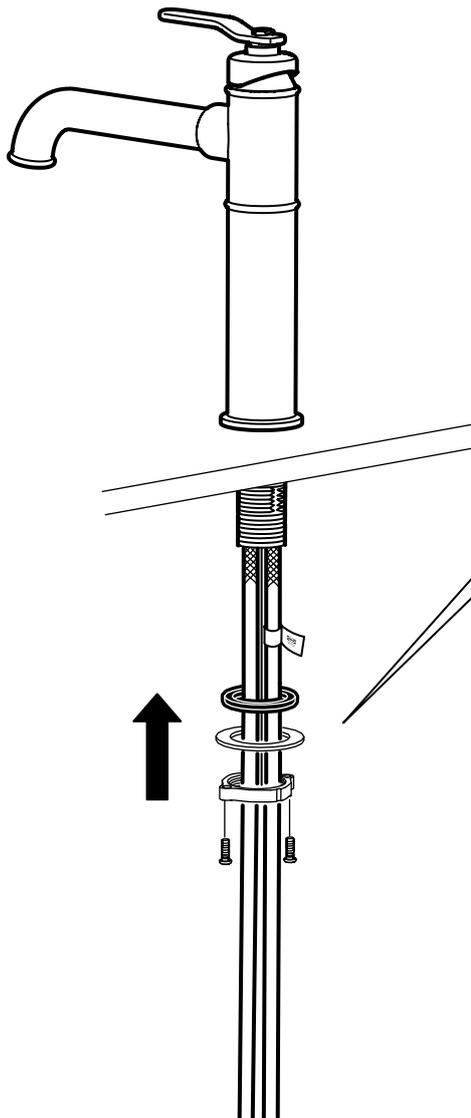


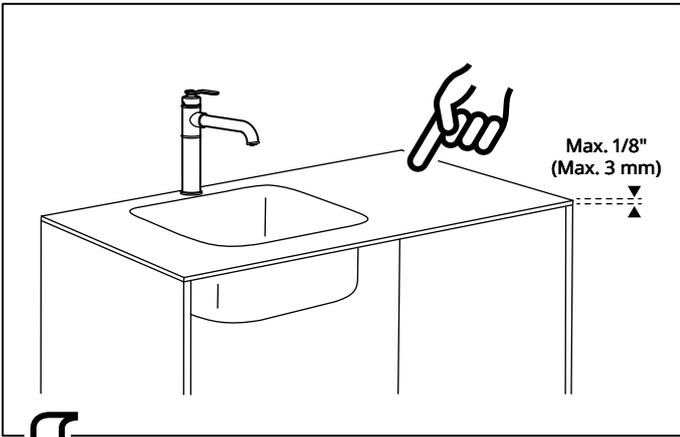





2




1x

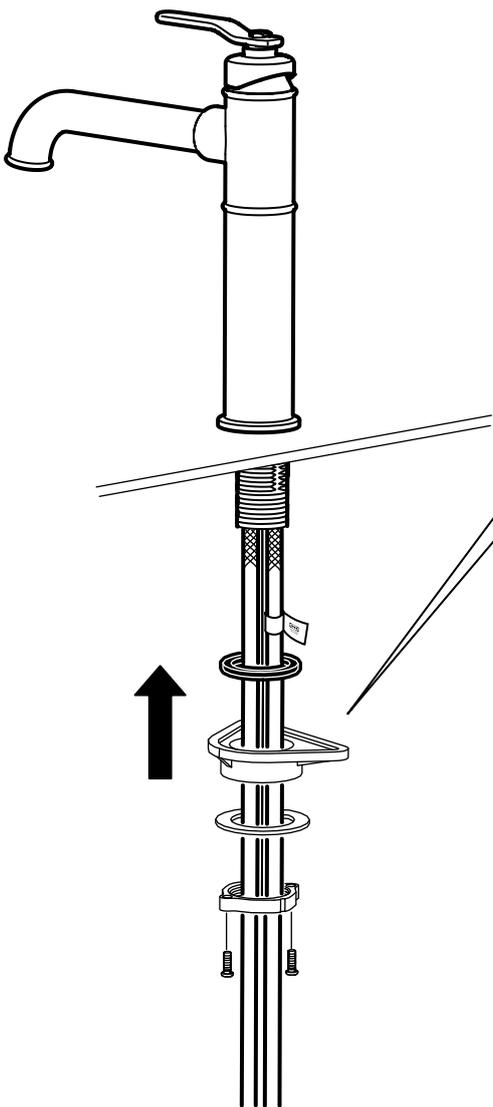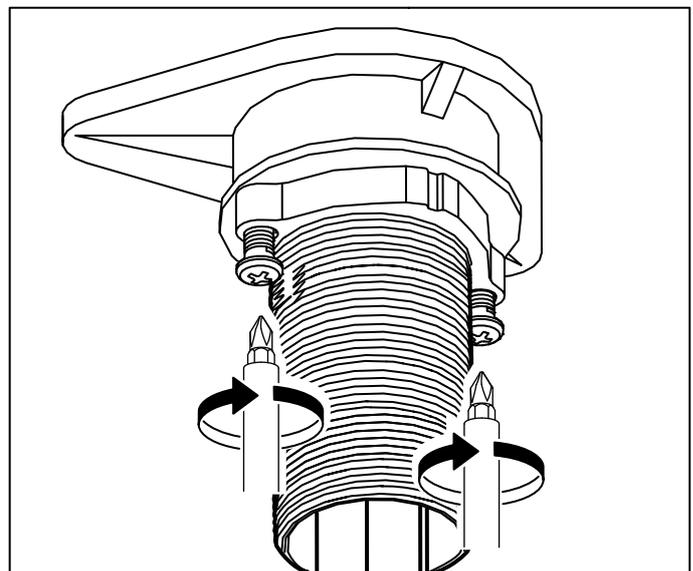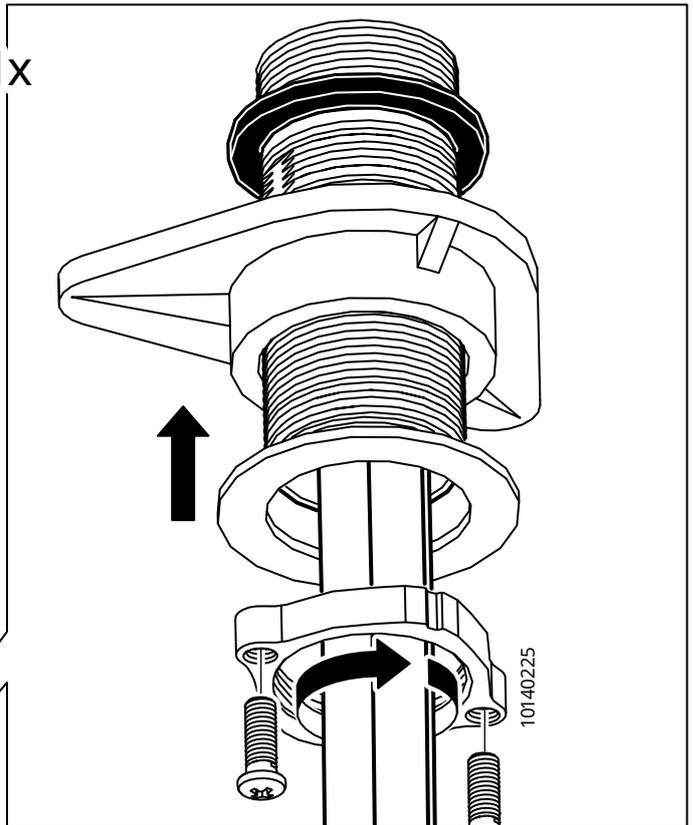

3

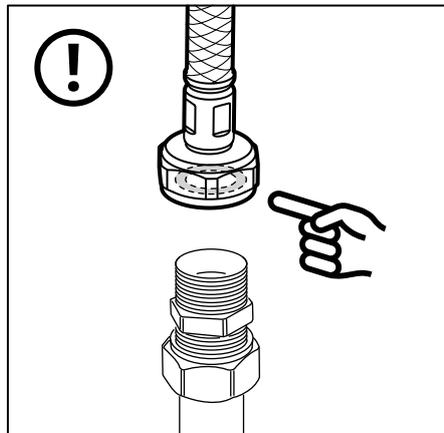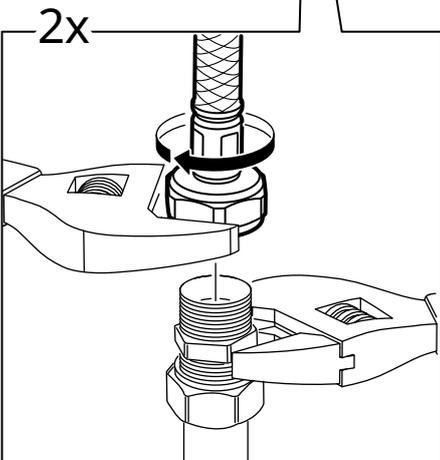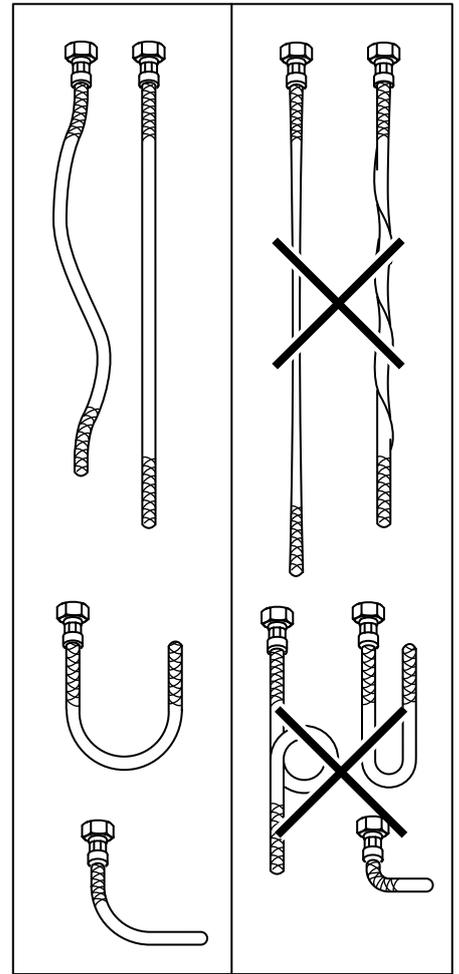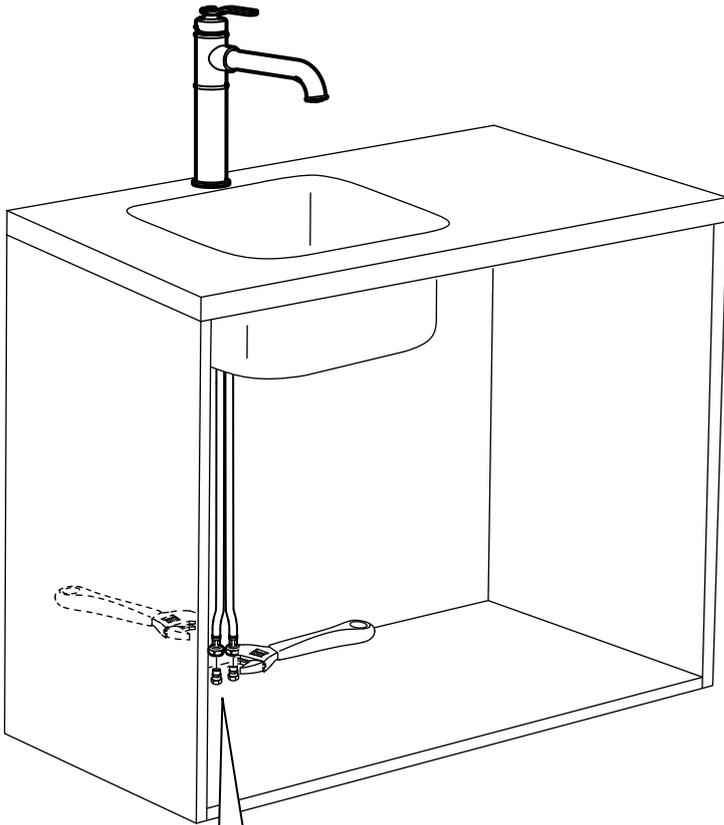

English
IMPORTANT! Do not tighten too hard: this can damage hoses/pipes and washers.

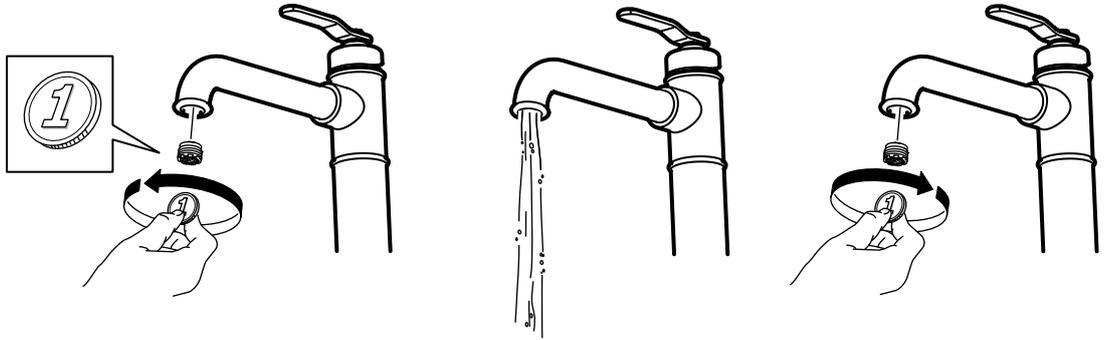

English

Before use: Unscrew the Aerator/Flow Guide and allow the water to run freely for a few minutes. Then screw the Aerator/Flow Guide back in place. Ensure that it is tight to prevent removal by hand.



English

Check at regular intervals to make sure that the installation is not leaking.

