Buying guide

SKYTTA

Sliding door system

Safety

This furniture must be fixed to the ceiling. Different ceiling materials require different types of fixing devices. Use fixing devices suitable for the ceilings in your home, sold separately.


Clean the floor rail and door wheels regularly to make sure the doors run smoothly and the wheels are not damaged.

Service message

Installing sliding doors can require professional carpentry knowledge. We recommend you to use the IKEA Assembly service to make sure the doors get a perfect fit in your space.



SKYTTA sliding door system has a 10-year guarantee

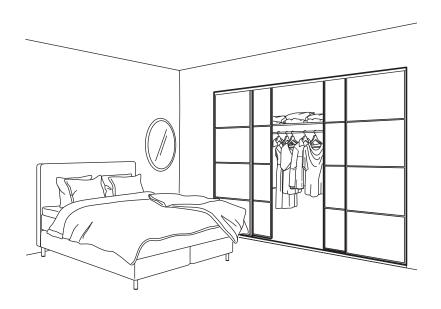

Sliding doors for any space

Save space, create new space or hide space with SKYTTA sliding doors. The door frames and rails come in three different colours and combines with panels from the PAX range to create a personal solution. Made to run between the ceiling and floor, so no wardrobe frames are needed, and suitable with any of our storage system that fits your space. Or use them as a room divider. Choose a sleek, minimalistic door or an industrial looking glass door to set the style in your room.



Good to know

Create your own sliding door by choosing between different frames and panels – and combine them as you like.

Our wide range of panels lets you choose between various materials and expressions, such as semi-transparent, glass, high-gloss, wooden foil and mirror.

Integrated handles give the sliding doors a sleek look with clean lines

The total assembly height including the floor and ceiling rails is 2045 mm for the 1960 mm door, and 2397 mm for the 2310 mm door. They can both be adjusted 6 mm up or down.

If your ceiling is higher than the doors, you can use SKYTTA ceiling height reducer and cover panel to create a fake wall and fill the gap up to 356 mm above the doors.

If the doors are higher than your ceiling, it's possible to cut the door at the top, along with the panel. We recommend that you always use our Assembly services for this.

When installing your new storage solution and SKYTTA doors, make sure there are no cables, pipes or heating systems nearby that may prevent the doors from closing completely or which might get damaged during installation.




Plan on paper or use the planner tool


Planning your SKYTTA sliding doors can be a bit tricky, and it's important that all the measurements are correct and aligned. It's perfectly fine to plan on paper if that's what you prefer, but there's also a planner tool available on IKEA.sg to help you out!


How to measure your space


Measure the width (X1, X2, X3) and height (Y1, Y2, Y3) of your space. Make sure to measure the height in at least three places as the ceiling or floor might be slightly uneven. It's important

that you measure the exact spot where you are going to place your doors, and that each surface is straight. Uneven or angled surfaces need to be adjusted before the doors are installed.

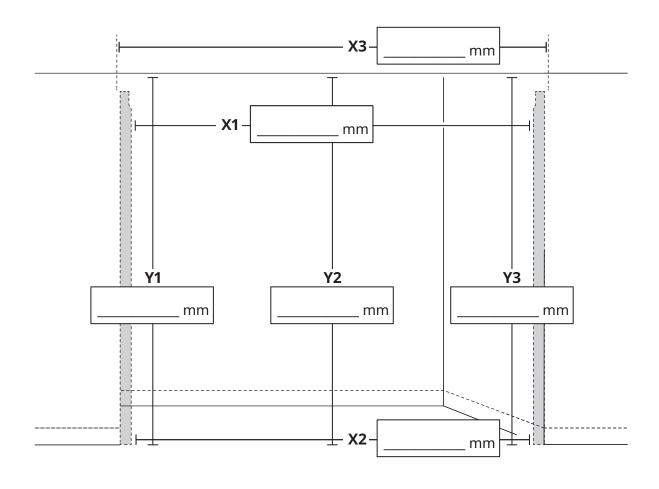

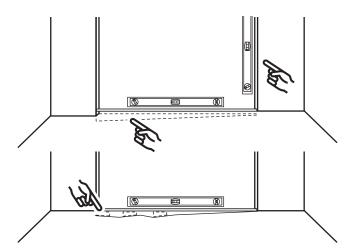





Don't forget about the skirting board or crown molding. We recommend to always remove or cut them, or there will be a gap between the door and wall. We recommend the use of a stop bar, explained more on page 9

How to plan – SKYTTA height


Our doors come in two heights but even if your height is a little bit lower, or a lot higher, there's a solution for you.

Ideal complete solution door + rail			
Low door: 2045 mm +/-6 mm	High door: 2397 mm +/-6 mm		
Distance betwee	n floor and ceiling	Problem	Solution
2039–2051 mm	2391-2403 mm	The door fits perfectly! Normal assembly with doors and rails.	
2052-2095 mm	2404-2447 mm	Just a little space left above the doors Compensate the ceiling height with distance pieces toward the ceiling. The distance pieces are not sold by IKEA.	
2075-2410 mm	2427-2762 mm	A lot of space left above the doors Compensate the ceiling height with SKYTTA ceiling height reducer and cover panels, or contact a carpenter for a customized solution. See more on page 10.	
1500-2038 mm	1500-2390 mm	The doors are too high It's possible to cut the door and panels. Please note that this option is not applicable for glass or mirror glass panels, as the glass is tem- pered and will split into tiny pieces. Check in the planning tool which other panels cannot be cut. This step needs to be done by a professional carpenter with the appropriate tools. The assembly instruction for this step is avail- able online only.	

How to plan - sloped ceiling

SKYTTA ceiling rail must be mounted onto a flat surface which is parallell with the floor. It cannot be mounted directly onto a sloped ceiling.


If you want to install SKYTTA sliding doors onto a sloped ceiling, you need to add an extra piece of wall which is wider than the width of the rail, and which creates a 90 degree angle with the wall

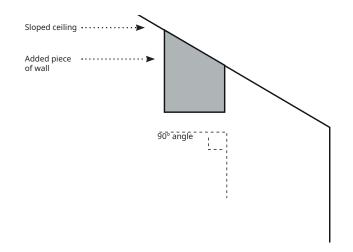


How to plan – storage behind

When you are placing storage behind your SKYTTA sliding door it's important to plan for that so that you are able to reach and/or open everything.

As an example, a drawer should not be placed behind the overlap of a door unless both doors can be moved, or the drawer cannot be opened.



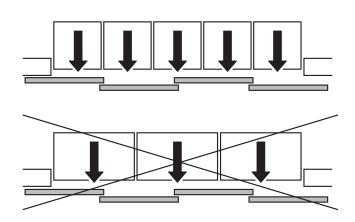


How to choose colour and panels

The SKYTTA sliding door frames comes in white, aluminium and black and you can combine them with all the panels from the PAX range. Either go with a matched solution or create a strong impact with contrasting finishes, it's all up to you!

The panels are sold in a package of 4, so for each SKYTTA door you choose, you also need one package of panels. There's a wide variety of colours, materials and finishes to choose from and you can mix them any way you like.

Just keep in mind that some of the panels have a different colour or finish on the backside, something that might be good to know if you are planning a solution where you see the doors from both sides.



How to plan the width of your SKYTTA

Maximum width is including door overlap of minimum 25 mm depending on size of the door.

With SKYTTA system you have many possibilities of combinations. You can combine a small door measuring 771 mm together with a wide door measuring 1021 mm and use 2- or 3-track rails.

You can also experiment with different door overlaps, yet keep in mind that a 25 mm overlap is the minimum needed. IKEA rec-

ommends as little overlap as possible to get the best symmetry and opening. Also, a big opening is recommended since this makes it easier to reach your things behind the doors. The following examples show the difference between 2- and 3-track rails.

Combinations with the 2-track rail

Combinations with the 3-track rail

2 doors in 2-track rail

2× 771 mm door








We do not recommend using the 3-track rail for a combination with 2 doors.

3 doors in the 2-track rail

3 doors in the 3-track rail

3x 1021 mm doors






We do not recommend using the 2-track rail for a combination with 3 doors.

4 doors in the 2-track rail


4× 1021 mm doors



We recommend the 2-track rail for this combination. A 3-track rail is possible but will not give a bigger opening or add depth.

4 doors in the 3-track rail

4× 1021 mm doors




How to plan the width of your SKYTTA

Combinations with the 2-track rail

Combinations with the 3-track rail

5 doors in the 2-track rail


5× 1021 mm doors



We recommend the 3-track combination since this will give a bigger opening. The 2-track rail is also possible but consider how easily you will want to reach your things behind the

5 doors in the 3-track rail


5× 1021 mm doors



6 doors in the 2-track rail

6× 1021 mm doors


doors.



We recommend both combinations, yet the 3-track rail will give a bigger opening. Consider how easily you will want to reach your things behind the doors and the visual aspect.

6 doors in the 3-track rail

6× 1021 mm doors



You will find more possible combinations at the end of this buying guide.


SKYTTA rails and fittings


Pick the right amount of rails

When you have decided on the amount of doors, you pick the rails. Each rail is 2 m long and can be joint and then cut to the correct length to match the width of the doors. They are available in the same finishes as the door frames – white, aluminium and black

The top rail is mounted in two steps. Start with mounting a wooden beam after you have found good fixing points in the ceiling. Then mount the aluminium rail, after adjusting the height/straightness on the preassembled flange screws, to the wooden beam.

The floor rail is provided with double glue tape which works on solid flooring. Avoid using the floor rail on rugs, as it will not stay fixed properly.

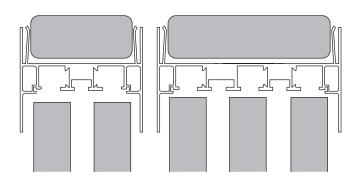



2-track rail with doors

3-track rail with doors

Add the right amount of fittings for the doors

Depending on the rail, you always pick 1 package of fittings for either 2-track or 3-track rails. They are used for the doors in the ends.

You also need one package of fittings for middle door per each extra door. Here's a table to help you figure out how many packages of fittings you will need.

Amount of doors	Amount of fitting packages for 2-track rail	Amount of fitting packages for middle door
2	1	0
3	0	1
4	1	2
5	1	3
6	1	4

Amount of doors	Amount of fitting packages for 3-track rail	Amount of fitting packages for middle door
2	0	0
3	1	1
4	1	2
5	1	3
6	1	4


How to plan - total depth


Get the right depth

Since SKYTTA runs on rails from floor to ceiling, you can pick and choose what storage solution you want to place behind the doors.

Don't forget to add enough space for your storage, as well as the depth of the rails and some extra space. We are suggesting a minimum of 30 mm between the sliding doors and the storage behind them.

Please note that the ceiling rail is a little deeper than the floor rail, due to the cover parts, as shown in the illustration. For the 2-track rail you need to count 81 mm depth, and for the 3-track rail you need to count on a depth of 122 mm.






SKYTTA stop bar

Frame your doors with a stop bar

A stop bar is a good way of creating a frame around your sliding doors, as well as providing an extra protection for the wall. It can be placed above the skirting board or fitted inbetween as the illustration shows.

Don't forget to measure the thickness of your skirting board, as that can differ from style and brand. If the skirt board is thicker than 18 mm, we recommend to cut it out and use the stop bar instead, as shown in the illustration.


Our SKYTTA stop bar is available in white and comes in two widths to match the rails. It's 18 mm thick and 240 cm high with the possibility to cut to desired height.

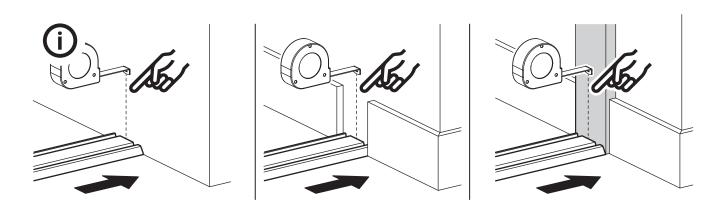

It's possible to use the doors without the SKYTTA stop bar as shown in this illustration or use a customised solution. Keep in mind that walls can be slightly uneven if you let the doors run against the wall, which can cause gaps.

Cut the skirting board and crown molding so that the stop bar fits between the floor and ceiling. The stop bar could be placed above the skirting board, in wich case you need to measure the skirting board as the thickness vary from brand and style.

How to build with ceiling height reducer

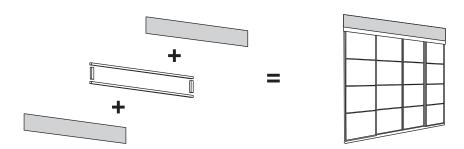

Is your ceiling higher than the SKYTTA sliding doors? No worries. The ceiling height reducer will help you bridge the gap. Use them above your doors and complete with cover panels that you paint to match.

This ceiling height reducer can be mounted above the SKYTTA sliding doors, to bridge the gap if your ceiling height is up to 365 mm higher than the doors.

Complete the ceiling height reducer with SKYTTA cover panel on each side and paint it to match your room. Or use pre-treated cover panels from our kitchen range, available in a variety of colours

All parts and prices

Overall size: Width×Depth×Height.



SKYTTA sliding door frame. Complete each door with one package of panels.

102×1	96	cm
-------	----	----


Aluminium	705.533.61	\$140	
Black	305.533.63	\$140	
White	605.534.32	\$140	
102×231 cm			
Aluminium	205.534.34	\$160	
Black	705.534.36	\$160	
White	105.534.39	\$160	
77×196 cm			
Aluminium	705.534.41	\$120	
Black	305.534.43	\$120	
White	805.534.45	\$120	
77×231 cm			
Aluminium	205.534.48	\$140	
Black	805.534.50	\$140	
White	405.534.52	\$140	

SKYTTA rail for sliding doors. Note! Each package of rails contains 1 floor rail, 1 ceiling rail and 1 wooden beam, all of them 2 m wide.

	ium

2 tracks	205.533.49	\$120
3 tracks	805.533.51	\$140
Black		
2 tracks	405.533.53	\$120
3 tracks	905.533.55	\$140
White		
2 tracks	505.533.57	\$120
3 tracks	105.533.59	\$140

SKYTTA fitting packages. Choose one set of package for either 2-track or 3-track rail, and then one package for middle door for each door that is placed in the middle. For example, a 4 door solution needs 1 package of 2-track rail fittings, and 2 packages of fittings for middle doors.










SKYTTA stop bar, white, set of 2. Choose the stop bar that matches the type of rail you have.

2 tracks	005.534.54	\$40
3 tracks	305.534.57	\$60



2 tracks	31	305.533.39	\$80
3 tracks		905.533.41	\$100


SKYTTA top cover panel. Note! The panel comes in a paper foil that needs to be painted to match your wall.



Combinations

Pick among some ready-made sliding door solutions, or create your own combination of metal frames and panels. The metal frame is available in white, black and aluminium and the panels come in a variety of materials and colours. Choose one package of panels per sliding door frame.

You will find all sliding door frames and panels on our website IKEA.sg/along with a SKYTTA planner tool to help you out!



Combination with 2 doors and 2-track rail. 2× 77 cm doors.


SKYTTA/MEHAMN sliding door combination,

white. Available in two heights. Overall size: 152×205 cm

This combination \$550 (095.008.28)

Overall size: 152×240 cm

This combination \$610 (495.008.31)



Combination with 3 doors and 3-track rail. 3× 77 cm doors.

SKYTTA/HOKKSUND sliding door combination,


high-gloss light grey. Available in two heights.

Overall size: 226×205 cm

This combination \$1,130 (995.012.39)

Overall size: 226×240 cm

This combination **\$1,250** (595.012.41)



Combination with 4 doors and 2-track rail. 2× 77 cm and 2× 102 cm. SKYTTA/HOKKSUND sliding door combination,


high-gloss light grey. Available in two heights.

Overall size: 301×205 cm

This combination \$1,290 (395.012.42)

Overall size: 301×240 cm

This combination **\$1,440** (195.012.43)



Combination with 3 doors and 3-track rail. 3× 102 cm doors.

SKYTTA/HOKKSUND sliding door combination,

high-gloss light grey. Available in two heights.


Overall size: 301×205 cm

This combination \$1,250 (194.998.67)

Overall size: 301×240 cm

This combination \$1,370 (694.997.75)

Combinations



Combination with 4 doors and 2-track rail. $4 \times 102 \ cm$ doors.

SKYTTA/MEHAMN/AULI sliding door combination, white-stain oak and mirror glass. Available in two heights.

Overall size: 401×205 cm

This combination \$1,290 (994.998.68)

Overall size: 401×240 cm

This combination \$1,430 (494.997.76)

All combinations below have a 25 mm overlap and do not have a stop bar. If a stop bar is used on both sides, this adds 36 mm to the total width. The minimum overlap is 25 mm.

These combinations use a small door width of 771 mm and a wide door width of 1021 mm.

If the total width is reduced, the opening will reduce by just as much and the overlap will increase.

The maximum overlap depends on what is being stored behind the doors and the visual aspect. The recommendation is to have as little overlap as possible.

Combination with 2 doors and the 2-track rail 2× 771 mm doors






1517 mm 771 mm 746 mm

Combination with 2 doors and the 2-track rail

1× 771 mm and 1× 1021 mm door






Combination with 2 doors and the 2-track rail


2× 1021 mm doors





Combination with 4 doors and the 2-track rail


4× 771 mm doors




	3009 mm
771 mm 771 ı	mm 771 mm 771 mm
	1467 mm

Combination with 4 doors and the 2-track rail


3× 771 mm and 1× 1021 mm doors







Combination with 4 doors and the 2-track rail.

2× 771 mm and 2× 1021 mm doors






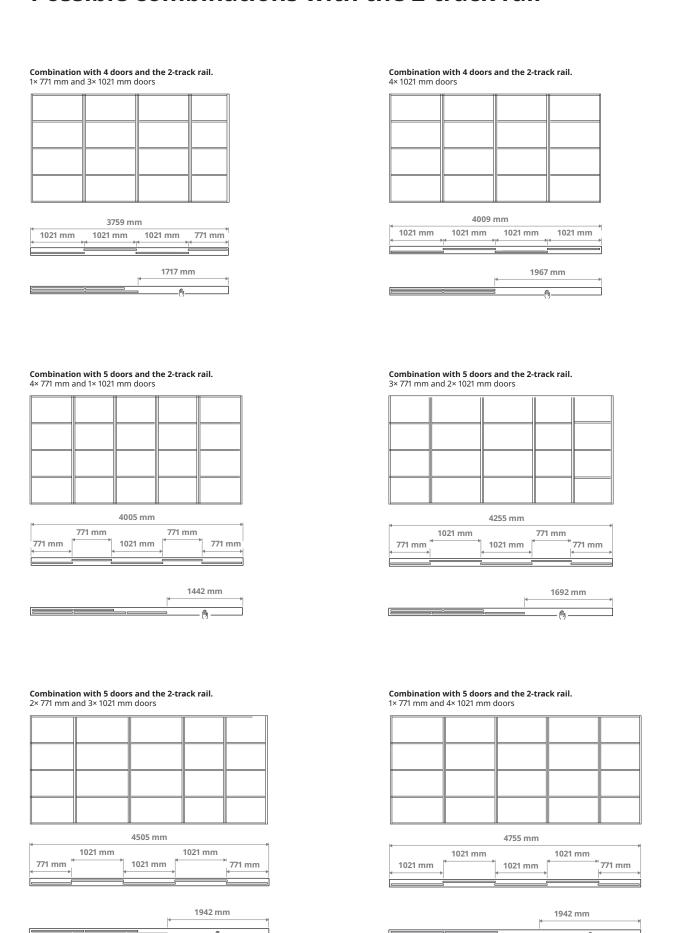


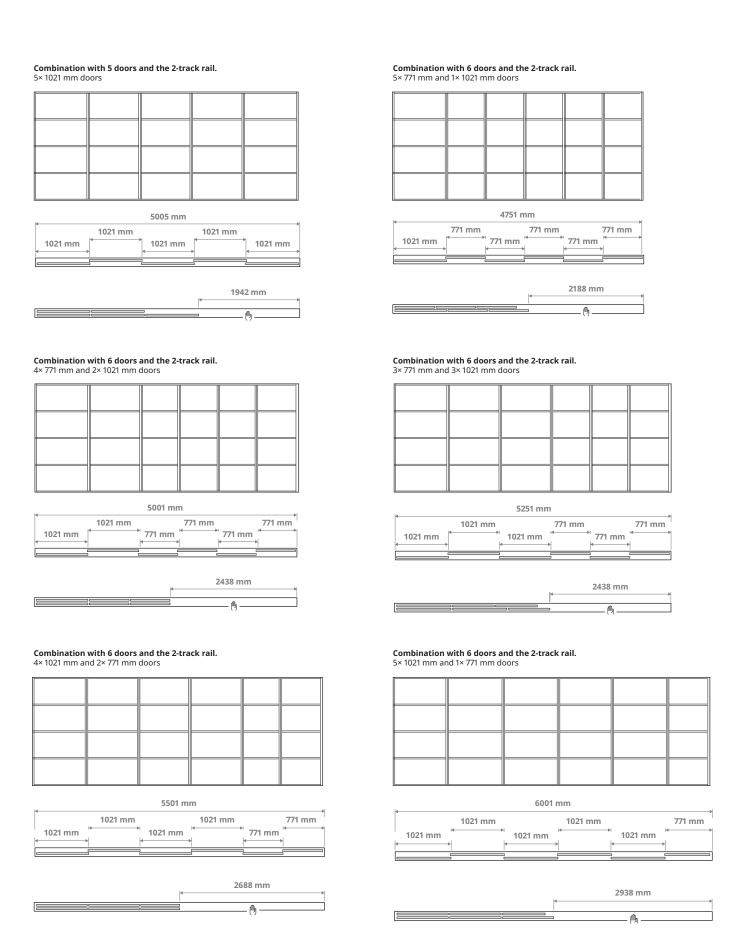

Combination with 6 doors and the 2-track rail. 6× 1021 mm doors 6001 mm 1021 mm 1021 mm 1021 mm 2938 mm


Combination with 3 doors and the 3-track rail.







Combination with 3 doors and the 3-track rail.


2× 771 mm and 1× 1021 mm doors






Combination with 3 doors and the 3-track rail. 1×771 mm and 2×1021 mm doors






Combination with 3 doors and the 3-track rail.


3× 1021 mm doors






Combination with 5 doors and the 3-track rail.


4× 771 mm and 1× 1021 mm doors






Combination with 5 doors and the 3-track rail.


3× 771 mm and 2× 1021 mm doors










Combination with 5 doors and the 3-track rail. 2× 771 mm and 3× 1021 mm doors 4505 mm 771 mm 771 mm 1021 mm 771 mm 2713 mm Combination with 6 doors and the 3-track rail. 5× 771 mm and 1× 1021 mm

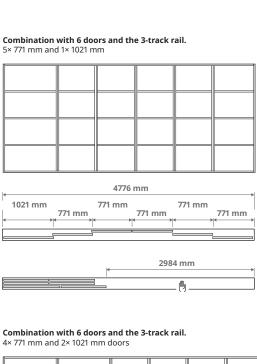





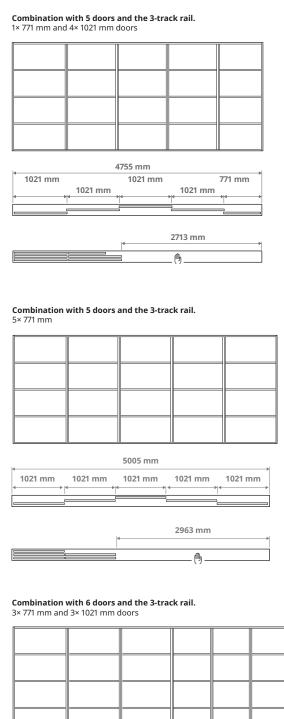




Combination with 6 doors and the 3-track rail. 2× 771 mm and 4× 1021 mm doors








Combination with 6 doors and the 3-track rail.

6× 1021 mm doors







Combination with 6 doors and the 3-track rail.

1× 771 mm and 5× 1021 mm doors

