

BILRESA





Design and Quality
IKEA of Sweden

English

4

עברית

7

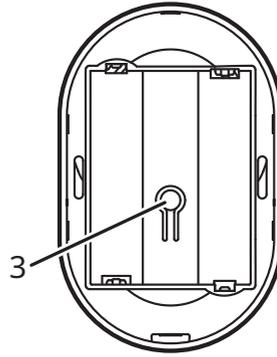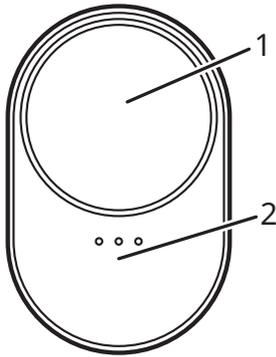

Product description

BILRESA remote control with scroll wheel is designed to control up to 3 groups of products. It's a Matter-certified smart product that works with the IKEA Home smart system or any other system that uses the Matter standard. Pair it directly with a smart product from IKEA to use it without a smart system.

Getting started

With IKEA Home smart system

To connect to an IKEA Home smart system, a hub from IKEA and the IKEA Home smart app are needed.

1. Turn the remote control on by inserting 2 x AAA HR03 batteries. It will automatically power on and go into pairing mode for 15 minutes to allow connection to an IKEA Home smart system.
2. Scan the QR Code from the yellow cover in the packaging and follow the instructions in the IKEA Home smart app to connect the remote control to the system. Each product has a unique QR code.

To put the remote control back into pairing mode, open the battery compartment and press the system button.

With a Matter-certified smart system

To connect to a smart system that uses the Matter standard, a hub and app from the same manufacturer are needed.

1. Turn the remote control on by inserting 2 x AAA HR03 batteries. It will automatically power on and go into pairing mode for 15 minutes to allow connection to a Matter-certified smart system.
2. Scan the Matter QR Code from the front cover of the Advice & Care Instructions and follow the instructions in the smart home manufacturer's app. The Matter QR Code is also printed on the remote control.

To put the remote control back into pairing mode, open the battery compartment and press the system button.

Without a smart system

Smart products from IKEA can be paired directly to each other without a smart system.

Pair one or more smart products to each of the 3 groups on the remote control. Switch between product groups by pressing beneath the LED lights. Each light controls a different group of products.

Turn the remote control on by inserting 2 x AAA HR03 batteries. Quick-press the system button 4 times and hold the remote within 5 cm of the smart product it should be paired with. Pairing mode will be open for 30 seconds and default to product group 1.

When at least one smart product is connected to group 1, group 2 will be available for pairing. Press under the LED lights until group 2 is illuminated and follow the pairing instructions above to connect products to that group. Once group 2 is connected to at least one product, group 3 can be connected.

Note, a maximum of 10 smart products from IKEA can be controlled with each group on the remote control by direct pairing. If the products intended for pairing are close together, turn off and disconnect the ones already connected while adding the next product.

Using the product

Wheel (1)

Scroll the wheel, single-press, multi-press and long-press to control all products in the group.

Note, wheel functions depend on the product type connected to the remote control and the system it is connected to.

Control under the LED lights (2)

Press to switch between product groups.

System button (3)

Press to put the remote control into pairing mode or to reset.

Buttons and controls for smart products from IKEA

| | Scroll wheel (press) | Scroll wheel (scroll) | Control under the LED light | System button |
|-----------------|--|---|--|--|
| Lights | <ul style="list-style-type: none"> Single-press: ON/OFF Double-press: next colour Triple-press: previous colour | <ul style="list-style-type: none"> Scroll left and right: dim the lights | <ul style="list-style-type: none"> Single-press: next product group | <ul style="list-style-type: none"> Single-press: pairing mode with a smart system; Quick-press 4 times: pairing directly with smart product from IKEA |
| Speakers | <ul style="list-style-type: none"> Single-press: PLAY/PAUSE Double-press: next track Triple-press: previous track | <ul style="list-style-type: none"> Scroll left and right: volume up/down | <ul style="list-style-type: none"> Single-press: next product group | <ul style="list-style-type: none"> Single-press: pairing mode with a smart system |
| Plugs | <ul style="list-style-type: none"> Single-press: ON/OFF | N/A | <ul style="list-style-type: none"> Single-press: next product group | <ul style="list-style-type: none"> Single-press: pairing mode with a smart system Quick-press 4 times: pairing directly with a smart product from IKEA |

Pairing mode

The remote control needs to be in pairing mode to connect to an IKEA Home smart system, any system that uses the Matter standard or to pair directly with a smart product from IKEA.

To connect to an IKEA Home smart system or any other system that uses the Matter standard, press the system button to put the remote control into pairing mode. The pairing will be open for 15 minutes. All 3 LED will pulse while pairing and then blink twice once connected.

To pair directly with a smart product from IKEA, quick-press the system button 4 times. Select a group by pressing the control under the LED lights and hold the remote within 5 cm of the smart product it should be paired with. Pairing mode will be open for 30 seconds. The LED assigned to the selected group will blink fast while pairing and then blink twice once connected.

Please note, each group needs at least one smart product before other products can be paired to the next group.

Factory reset

To reset the remote control, open the battery compartment and press and hold the system button for 10 seconds or until the red LED light stops blinking. It will automatically restart and be available for pairing with a smart system for 15 minutes.

Battery care

When the battery is low, a red LED light will blink twice when any button or control is pressed. If the remote control is connected to an IKEA Home smart system, the battery status will be also shown in IKEA Home smart app. 2 x new LADDA AAA HR03 batteries will usually power the remote control for 24 months before they need to be changed.

Care instructions

To clean the product, wipe with a dry cloth.

Good to know

- If the product is connected to an IKEA Home smart system, additional features are available in the IKEA Home smart app.
- If the product is connected to another smart system that uses the Matter standard, check with the manufacturer for available features.
- This product uses Thread technology to communicate with other smart products. A Thread border router is needed to connect to Matter systems. Many smart products or hubs, have a Thread border router built in.
- Different building materials and placement of the product can affect the wireless connectivity range.

Safety and compliance

WARNING

- Use only indoors.
- Discard the product if damaged.
- Never submerge in water or other liquids.
- The product is only suitable for mounting at heights up to 2m.
- Children should be supervised to ensure they do not play with the product.
- Do not use batteries which are low in charge or empty.
- Always insert the batteries according to the polarity indications (+/-).
- Risk of explosion if either battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.
- Do not mix batteries of different capacities, types or date stamps.
- Batteries should be handed in for recycling in accordance with local environmental regulations for waste disposal.
- Operating temperature: 0° C to 40° C (32° F to 104° F).

Technical data

Model: BILRESA

Type: E2490, E2704

Input: 2 x AAA/HR03

Range: 10 m in open air.

Operating frequency: 2402 - 2480 MHz

Output power: 5 dBm (EIRP)

Recommended batteries:

LADDA AAA HR03 rechargeable batteries.

Manufacturer: IKEA of Sweden AB

Address: Box 702 SE-343 81 Älmhult SWEDEN



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal. By separating a marked item from household waste, you will help reduce the volume of waste sent to incinerators or land-fill and minimize any potential negative impact on human health and the environment. For more information, please contact your IKEA store.

| כפתור בקרה | שליטה תחת תאורת הליד | גלגלת (גלילה) | גלגלת (לחיצה) | תאורה |
|---|-------------------------------|---|---|-------|
| לחיצה אחת: הפעלת מצב צימוד עם מערכת חכמה; 4 לחיצות מהירות: צימוד ישיר למוצר חכם של איקאה | לחיצה אחת: קבוצת המוצרים הבאה | גלילה שמאלה או ימינה: עמעום עוצמת האור | לחיצה אחת: הפעלה/כבייה לחיצה כפולה: הצבע הבא 3 לחיצות: הצבע הקודם | |
| לחיצה אחת: הפעלת מצב צימוד עם מערכת חכמה | לחיצה אחת: קבוצת המוצרים הבאה | סיבוב שמאלה וימינה: הגברת/הנמכה של עוצמת הקול | לחיצה אחת: הפעלה/השהיה לחיצה כפולה: רצועת השמע הבאה 3 לחיצות: רצועת השמע הקודמת | |
| לחיצה אחת: הפעלת מצב צימוד עם מערכת חכמה; 4 לחיצות מהירות: צימוד ישיר למוצר חכם של איקאה | לחיצה אחת: קבוצת המוצרים הבאה | N/A | לחיצה אחת: הפעלה/כבייה | |

בטיחות ותקן

עברית

- לשימוש ביתי בלבד.
- יש להשליך את המוצר במידה ופגום.
- אין להרטיב במים או בכל נוזל אחר.
- מוצר זה מיועד להתקנה בגובה מרבי של 2 מטרים.
- יש להשגיח על ילדים על מנת להבטיח שהם אינם משחקים עם המוצר.
- אין להשתמש בסוללות ריקות או עם עוצמת טעינה נמוכה.
- הכניסו את הסוללות לחרוץ: הטעינה בהתאם לסימונים (+/-)
- החלפת הסוללה שלא בהתאם להוראות עלולה לגרום לפיצוץ. יש להשליך סוללות משומשות בהתאם להנחיות.
- אין לערבב בין סוללות בעלות יכולות, סוגים או חותמות תאריך שונות.
- יש למסור סוללות ריקות למחזור בהתאם לתקנות הרשות המקומית.
- טמפרטורות הפעלה: 40°C עד 0°C

מפרט טכני

דגם: BILRESA
סוג: E2490, E2704
מתח: 2x AAA/HR03
טווח: 10 מ' באוויר הפתוח.
תדר הפעלה: 2402-2480 MHz
הספק: 5dBm (EIRP)

סוללה מומלצת:

סוללות טבעות AAA HR03 LADDA.

יצרן: IKEA of Sweden AB

כתובת: Box 702 SE-343 81 Älmhult SWEDEN



סימן המחזור מראה שיש להשליך את המוצר בנפרד מהפסולת הביתית. יש להעביר אותו למחזור בהתאם לחוקים המקומיים. באמצעות הפרדת מוצר זה מן הפסולת הביתית, תעזרו להפחית את כמות הפסולת המועברת למשפחות או מטמנות ולמוער את ההשפעה השלילית על בריאות האנשים והסביבה. לקבלת מידע נוסף, אנא צרו קשר עם חנות איקאה הקרובה לביתכם.

מצב צימוד

השלט הרחוק חייב להיות במצב צימוד כדי להתחבר למערכת Matter או למערכת התומכת בתקן Matter. ניתן גם לחבר אותו ישירות למוצר חכם של איקאה.

כדי לחבר את השלט הרחוק למערכת Matter של IKEA Home smart או לכל מערכת התומכת בתקן Matter, לחצו על כפתור הבקרה להפעלת מצב הצימוד. הצימוד יהיה זמין למשך 15 דקות. 3 נוריות הליד יתבהבו במהלך הצימוד, ולאחר החיבור, הן יתבהבו פעמיים.

כדי להצמיד ישירות למוצר חכם של איקאה, לחצו במהירות על כפתור הבקרה 4 פעמים. בחרו קבוצה על ידי לחיצה על הכפתור שמתחת לנוריות הליד והחזיקו את השלט הרחוק במרחק של 5 ס"מ מהמוצר. הצימוד יהיה זמין למשך 30 שניות. נורית הליד שהוקצתה לקבוצה שנבחרה תתבהב במהלך הצימוד, ולאחר החיבור, היא תתבהב פעמיים.

יש להצמיד כל קבוצה למוצר חכם אחד לפחות לפני צימוד מוצרים נוספים לקבוצה הבאה.

איפוס להגדרת יצרן

כדי לאפס את השלט הרחוק פתחו את תא הסוללות ולחצו לחיצה ארוכה על כפתור הבקרה למשך 10 שניות או עד שנורית הליד האדומה תפסיק להבהב. החיישן יתאפס מחדש באופן אוטומטי ויהיה זמין לצימוד עם מערכת חכמה למשך 15 דקות.

טיפול בסוללה



במידה ונדרש להחליף את הסוללה, נורית לד אדומה תתבהב פעמיים בעת לחיצה על אחד מהכפתורים. אם השלט הרחוק מחובר למערכת Matter של IKEA Home smart, סטטוס הסוללה יוצג גם באפליקציית Matter של IKEA Home smart. סוללות חדשות מסוג LADDA AAA HR03 מספקות כ-24 חודשי חיי סוללה.

הוראות טיפול

לניקוי המוצר, נגבו בעזרת מטלית יבשה.

טוב לדעת

- אם המוצר מחובר למערכת Matter של IKEA Home smart, יוצגו מאפיינים נוספים באפליקציית Matter של IKEA Home smart.
- אם המוצר מחובר למערכת חכמה המשתמשת בתקן Matter, יש לבדוק עם היצרן לגבי הפונקציות הזמינות.
- מוצר זה משתמש בטכנולוגיית Thread כדי לתקשר עם מוצרים חכמים אחרים. נדרש נתב ג'ובל כדי להתחבר למערכות Matter. מוצרים חכמים או רכזות רשת רבות כוללים נתב ג'ובל Thread מובנה.
- חומרי בניין שונים ומיקום המוצר עשויים להשפיע על טווח הקישוריות האלחוטי.

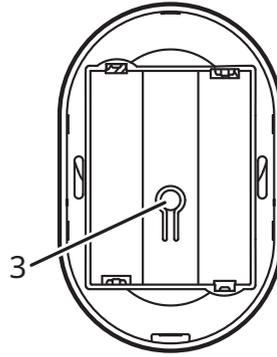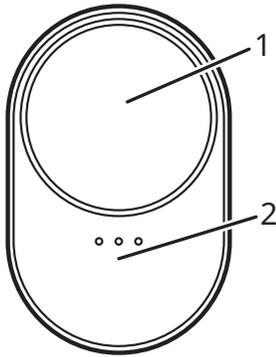

ללא מערכת חכמה

ניתן לחבר את המוצרים החכמים של איקאה ישירות זה לזה ללא מערכת חכמה.

הצמידו מוצר חכם אחד או יותר לכל אחת מ-3 הקבוצות בשלט הרחוק. החליפו בין קבוצות מוצרים על ידי לחיצה על הכפתור שמתחת לנוורות ה led. כל נורה שולטת בקבוצת מוצרים שונה.

הכניסו 2 סוללות AAA/HR03 להדלקת השלט הרחוק. למצב צימוד, לחצו במהירות על כפתור הבקרה 4 פעמים והחזיקו את השלט הרחוק במרחק של 5 ס"מ מהמוצר. הצימוד יהיה זמין למשך 30 שניות ויעבור כברירת מחדל לקבוצת מוצרים 1.

כאשר לפחות מוצר חכם אחד מחובר לקבוצה 1, קבוצה 2 תהיה זמינה לצימוד. לחצו מתחת לנוורות ה led עד שקבוצה 2 תידלק ועקבו אחר הוראות הצימוד לעיל כדי לחבר מוצרים לקבוצה זו. ברגע שקבוצה 2 מחוברת למוצר אחד לפחות, ניתן לחבר את קבוצה 3.

שימו לב, ניתן לשלוט ב-10 מוצרים חכמים של IKEA לכל היותר בכל קבוצה באמצעות שלט רחוק אחד על ידי צימוד ישיר שלהם. אם המוצרים שברצונכם לצמד קרובים אחד לשני, כבו ונתקו את המוצרים שכבר מחוברים לפני הוספת מוצר חדש.

אופן שימוש במוצר

גלגלת (1)

גללו את את הגלגלת, לחצו לחיצה אחת, מספר לחיצות לוחיצה ארוכה כדי בכל המוצרים בקבוצה. שימו לב, פונקציות הגלגלת תלויות בסוג המוצר ובמערכת שאליה הוא מחובר.

שליטה תחת תאורת ה led (2)

לחצו כדי לעבור בין קבוצות מוצרים.

כפתור בקרה (3)

לחצו כדי להעביר את השלט הרחוק למצב צימוד או כדי לאפסו.

תיאור המוצר

הגלגלת בשלט רחוק BILRESA תאפשר לכם לשלוט ב-1-3 מוצרים או קבוצות מוצרים בו-זמנית. מוצר חכם המאושר על ידי Matter ופועל עם IKEA Home smart או כל מערכת אחרת המשתמשת בתקן Matter. חברו אותו ישירות מוצר חכם ממגוון איקאה על מנת להשתמש בו ללא צורך במערכת חכמה.

הפעלה

עם מערכת הבית החכם של איקאה

כדי לחבר מוצר זה למערכת Matter, נדרשות רכות רשת ממגוון איקאה ואפליקציית IKEA Home smart.

1. הכניסו 2 סוללות AAA/HR03 להדלקת השלט הרחוק. הוא יופעל אוטומטית וייכנס למצב צימוד למשך 15 דקות כדי להתחבר למערכת Matter.

2. סרקו את קוד ה-QR על גבי החלק הצהוב של האריזה ועקבו אחר ההוראות באפליקציית Matter כדי לחבר את השלט הרחוק למערכת. לכל מוצר יש קוד QR ייחודי משלו.

כדי להחזיר את השלט הרחוק למצב צימוד, פתחו את תא הסוללות ולחצו על כפתור הבקרה.

מערכת חכמה תומכת בתקן Matter

כדי להתחבר למערכת חכמה התומכת בתקן Matter, נדרש רכות רשת ואפליקצייה מאותו יצרן.

1. הכניסו 2 סוללות AAA/HR03 להדלקת השלט הרחוק. הוא יופעל אוטומטית וייכנס למצב צימוד למשך 15 דקות כדי להתחבר למערכת חכמה התומכת בתקן Matter.

2. סרקו את קוד ה-QR של Matter המופיע על חוברת הוראות ההפעלה ועקבו אחר הוראות היצרן באפליקצייה. קוד ה-QR של Matter מודפס גם על השלט הרחוק.

כדי להחזיר את השלט הרחוק למצב צימוד, פתחו את תא הסוללות ולחצו על כפתור הבקרה.

